




ADVANCES

MASTER CATALOGUE 2015 | Tapping Preview

WIDIA 

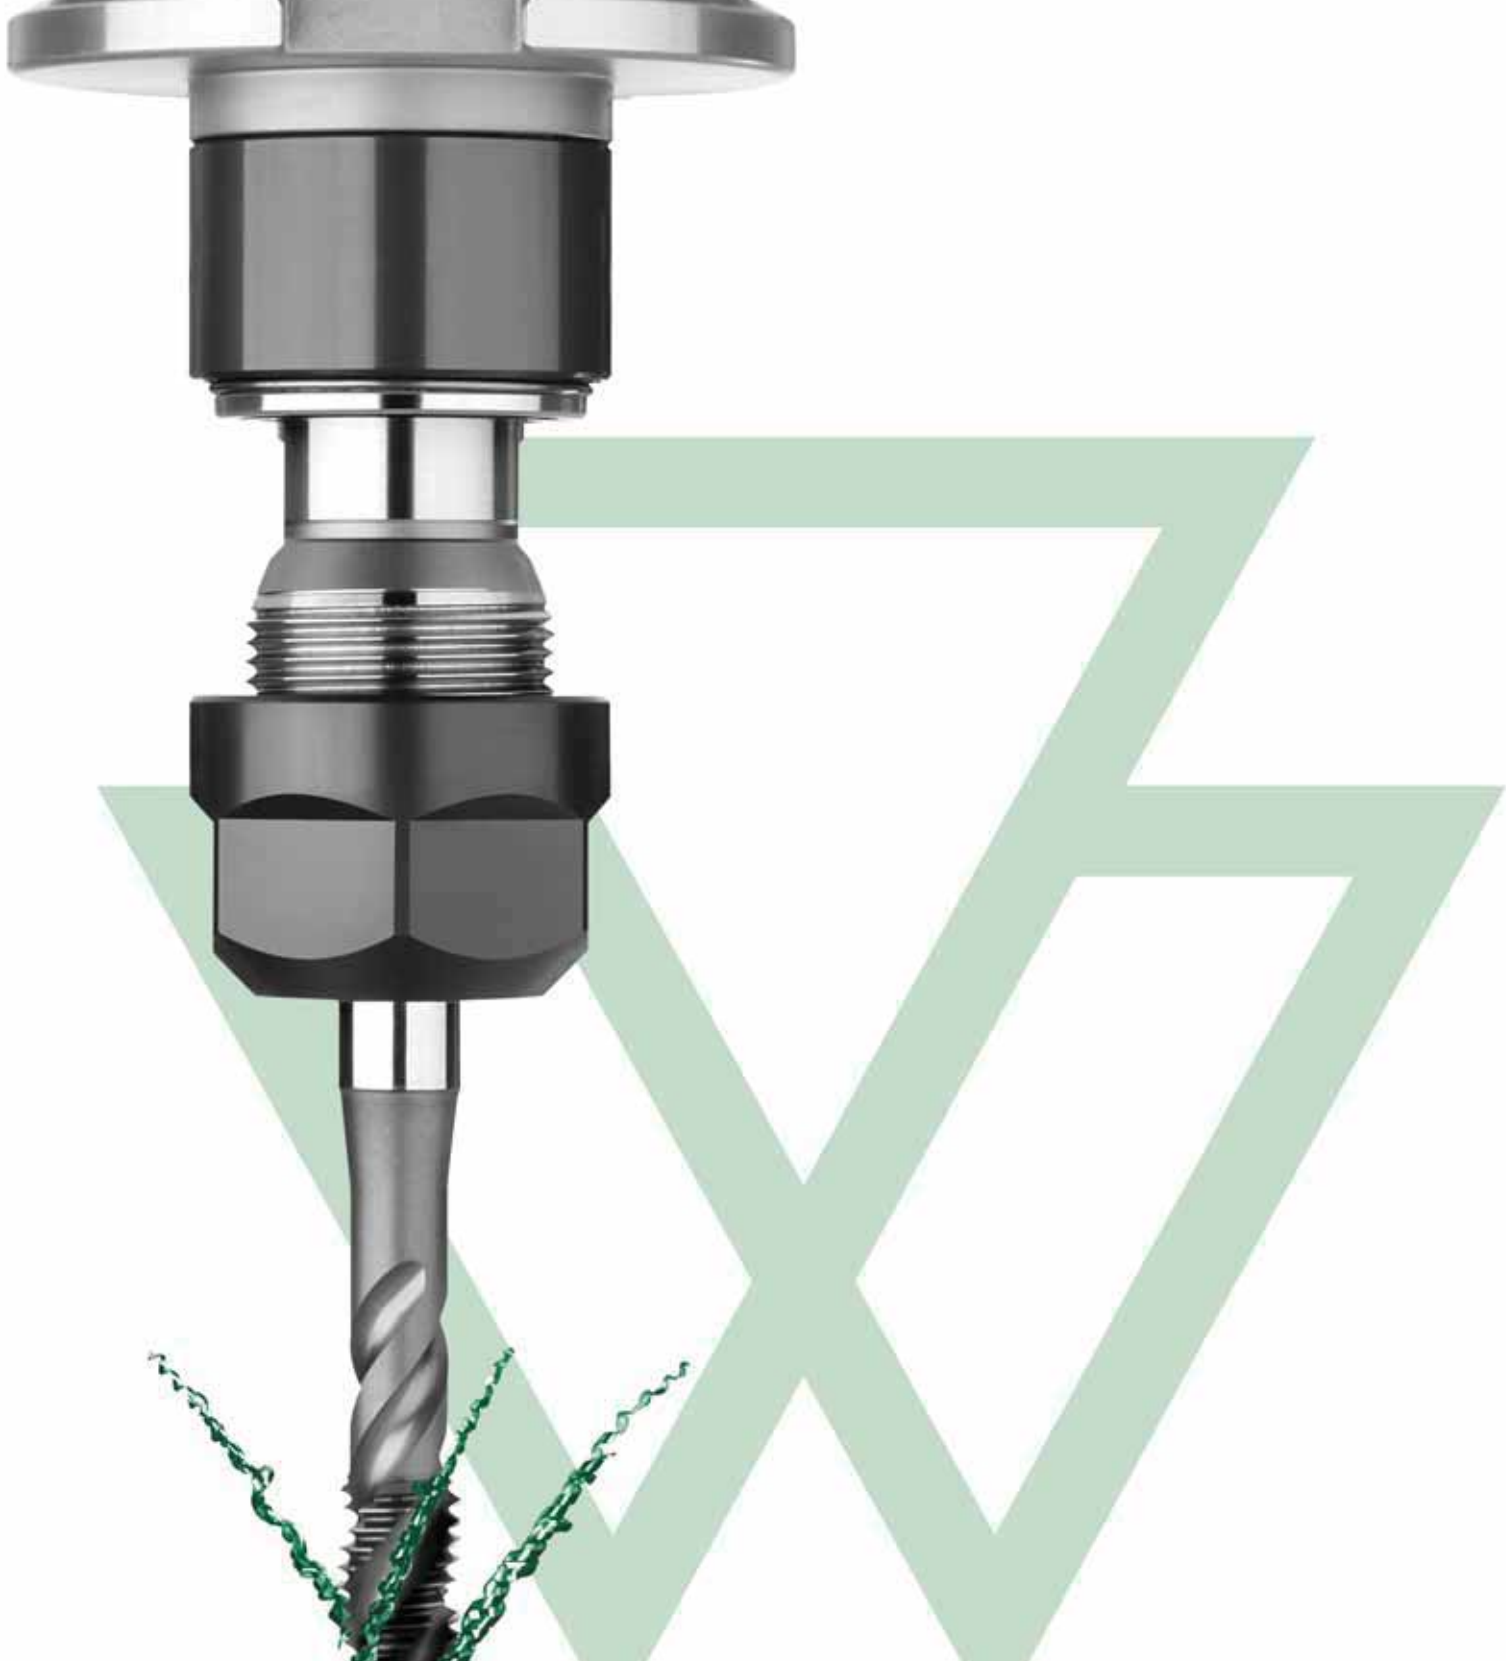

WIDIA™ Means Complete Quality

As an innovator for more than 80 years, the WIDIA Products Group has been designing and manufacturing metalcutting products that make customer machining processes more efficient and effective.

With thousands of products in our portfolio, the WIDIA Products Group offers competitive advantages that will enhance your productivity and bolster your profitability.

To learn more, contact your local Authorised WIDIA Distributor or visit www.widia.com.

TAPPING &
TOOLING SYSTEMS

Introduction	.ii–v
Service and Support	.vi–xvii
Tapping	
High-Performance Taps	.A2–A89
High-Performance Thread Mills	.A90–A110
Technical Information	.A112–A139
Tooling Systems	
Tooling Systems	.B1–B37
Index by Order Number	.C2–C11
Index by Catalogue Number	.C12–C23
Global Contacts	.D2–D3
Icon Legend	.D4–D5

WIDIA™

WIDIA means complete quality

When you buy products from the WIDIA family of brands, you're not just buying speed, power, and precision — you're buying complete quality. The WIDIA Products Group brands offer the most complete portfolio of precision-engineered products and solutions. With thousands of milling, turning, holmaking, and tooling systems products available through a skilled network of Authorised Distributor partners, you'll find everything you need from one single source.



80+ Years of Quality

1925

Application to register "WIDIA" as a trademark

1930

WIDIA wins the Grand Prix at the world exposition EXPO in Liege

1962

First patent granted for coated carbide inserts

1987

Launch of the Widaflex™ tooling system for turning, holmaking, and milling

2006

WIDIA celebrates 80 years

2011

Launch KM™ and ERICKSON™ Portfolio

1926

Tungsten carbide production begins

1968

Launch of first global coated grade

2000

QS 9000 TES and VDA 6.4 certification for the WIDIA operations in Essen and Lichtenau

2009

Launch of the TN5100™ and TN7100™ Series grades for turning

Technical expertise you can count on

WIDIA™ brand cutting tools are available exclusively through a specialised network of Authorised Distributor partners whom you can count on to deliver much more than products.

They will show you how to:

- Significantly reduce cycle time.
- Improve machine tool utilisation.
- Achieve measurable productivity improvements.
- Take advantage of proven supply chain solutions.
- Access local inventory and best-in-class technical support.
- Request onsite demonstrations of the latest tooling technology.



The most powerful family of brands in the industry

The WIDIA family of brands is well served by a global network of the finest Authorised Distributors in the industry, selected for their specialised expertise in the areas of:

Turning, Holmaking, Indexable Milling, and Tooling Systems

WIDIA

WIDIA
MANCHESTER

WIDIA
CLAPPDICO

WIDIA
CIRCLE

WIDIA
METCUT

Solid Carbide End Milling and Solid Carbide Drilling and Reaming

WIDIA
HANITA

WIDIA
RÜBIG

WIDIA
METAL REMOVAL

Tapping Operations

WIDIA
GTD

New Products

Our latest Metalcutting Innovations are designed to deliver higher productivity, longer tool life, and increased application versatility.

For more information about the latest products and services from WIDIA™, please contact your WIDIA Representative or Authorised WIDIA Distributor, or visit www.widia.com.



VariTap™ Series



- Ideal for customers who have a variety of materials to machine.
- Manufactured from high-vanadium HSS-E to provide long and consistent life.
- Geometry designed to enable tapping of a wide variety of ductile materials: carbon and alloy steels, stainless steels, ductile iron, and cast aluminium.
- Unique spiral point geometry provides low tapping torque while pushing chips ahead of the tap in through holes.



High-Performance HSS-E-PM Victory™ Taps

- Enhanced design for reliable thread in different materials.
- More resistant to edge chipping than carbide.
- Better performance at high speeds.





High-Performance Solid Carbide Taps

- High-performance to surpass competitive taps.
- More production from a single tool.
- Available in various specifications.



Synchro Plus™ Holders

- New line of Synchro Plus holders minimises axial forces resulting in longer cutting tool life; see pages B6–B9.



ToolBOSS™

Secure point of use solutions —
tooling at the right place at the right time.

Combined with our powerful WIDIA™ ToolBOSS Management Software, the 28 LEVEL cabinet provides a versatile, high-capacity solution to meet the unpredictable challenges of logistics and supply chain management.

- Cut tooling inventory.
- 24/7 stock availability.
- Unique reconfiguring.
- Decrease tooling spend.
- Reduce administrative costs.
- Accountability.
- Reduced cost per location.



Drawer Options

19 different drawer sizes available.

Compatibility

Fully compatible with existing ToolBOSS units.

Diagnostics

Built-in tray diagnostic port, facilitating improved remote system support, diagnosis, and repair.

Efficiency

Multiple drawers can be selected in one transaction, minimising the time required to manage large stock volumes.

To learn more about ToolBOSS, contact your local Authorised Distributor or visit www.widia.com.

**Future-Port**

USB interface, as well as a DCS expansion port, for use with RFID and other ancillary equipment.

High-Speed Access

Rapid search and selection of an item is enhanced with LED identification system, guiding users to the correct drawer.

Traceability

Software provides a complete audit trail, tracking component usage details.

Expandability

Expandable up to 10 units per system, providing up to 1.121 secure locations.

To learn more about ToolBOSS, contact your local Authorised Distributor or visit www.widia.com.

Recondition

Anyone can regrind your tools — only we truly recondition them.

Why recondition?


Our Reconditioning Services help optimise the total value of your metalcutting tools throughout their entire life cycle by giving them “like-new” performance characteristics — with rapid turnaround time — so the tools you need are always on-hand and perform just like new.

By sending your worn drills and end mills for reconditioning, you get:

- Proprietary geometry.
- Certified coatings.
- Superior quality.
- Like-new performance.
- Fast turnaround time.
- Application support throughout the entire tool life cycle.

Most tooling can be reconditioned up to five times.

Our Reconditioning Services deliver considerable savings throughout the life of your cutting tools and can reduce your overall tooling costs by more than 50%.

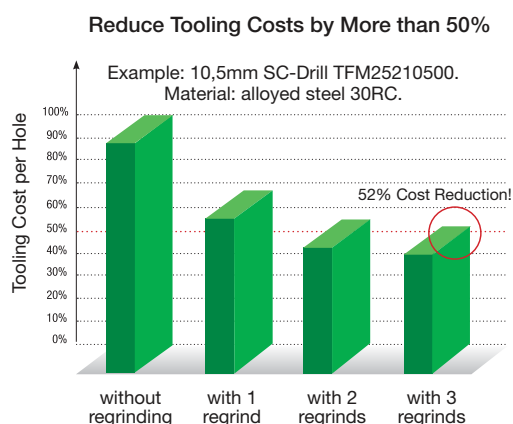

To learn more about our Reconditioning Programme, contact your local Authorised Distributor or visit www.widia.com.

Why Recycle?

It's the right thing to do!

It's easy for your company to be environmentally conscious with our Carbide Recycling Programme. By sending us your used carbide tools, you help preserve and protect the environment and ensure that these products are recycled responsibly.

It's profitable!

Not only does WIDIA™ make it easy for your company to be environmentally conscious, we offer an added incentive — it is profitable. Through our Carbide Recycling Programme, get the full value of your investment in metalcutting tools, improve profitability, and reduce your overall tooling spend. When you send us your used carbide, we will reward you with cash.


It's EASY!

Our Carbide Recycling Programme is available on the web and is easy to use. You can request a quote, arrange to send us your used carbide, and check the status of your shipment.

Green Boxes for green companies

The Green Box™ programme is a safe and efficient way for you to package and ship your spent carbide tools to an authorised recycling location.

Qualified used carbide includes mixed coated and uncoated metalcutting tools free of chips, oil, and steel contamination. Material must be free of braze.

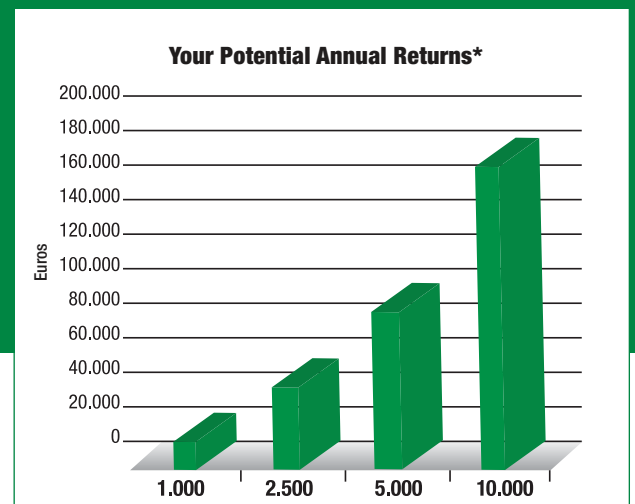

Carbide Scrap Kilos per Year*

*Actual returns may vary based on current market value for carbide recycled materials.



To learn more about our Carbide Recycling Programme, contact your local Authorised Distributor or visit www.widia.com.

Sustainable Engineering

Environmental Responsibility

We are deeply committed to designing and manufacturing environmentally responsible products that deliver high performance and proven value. With decades of experience in tooling and manufacturing, and the synergies of superior engineering, leading technology, and customised solutions, we offer some of the most effective opportunities for sustainable manufacturing in the industry. Our comprehensive range of products and excellent customer service make us your complete supplier of sustainable tooling solutions.



Sustainable Engineering

Leading the way with innovation, engineering, and service in standard and custom tooling — a proven methodology and partnership. Through our extensive experience in developing and implementing new project engineering strategies, we have pioneered a proven methodology to help you manufacture new products and bring them to market quickly. We formally evaluate progress and results with you throughout the project through our stage-gate management systems.

We can provide your engineering teams and machine tool builders with process engineering support, advanced metalcutting technologies, and project management expertise to help you achieve your sustainability goals. With our best-in-class process, you will experience accelerated time-to-market, lower overall costs, and reduced risks to implement new technologies.

To learn more, contact your local Authorised Distributor or visit www.widia.com.

On the Web

Fast, free, and easy registration.

You can easily register with www.widia.com to obtain full access to the features of the site.



Find a Local Authorised WIDIA™ Distributor in Your Area

The WIDIA Products Group offers world-class products and services globally. Our distributors know us, and more importantly, they know you. They know better than anyone in the industry how to put the global power of WIDIA to work for you — in your industry, in your region, and for your business.

Contact Us

Our customers are important to us. We want to provide you the best customer service in the industry. If you have a comment or question, please send it to us. We strive to respond to all inquiries within 24 hours.

WIDIA Products

Whether your operation is turning, milling, or holmaking, WIDIA brands are the high-performance tooling you need. We offer standard and custom solutions for the general engineering market.

To learn more, contact your local Authorised Distributor or visit www.widia.com.

Customer Application Support

Customer Application Support — get fast and reliable answers to your toughest metalcutting problems.



Easy access to proven metalworking expertise!

WIDIA™ Customer Application Engineers assist customers and engineering groups throughout the world with expert tool selection and application recommendations for the entire range of WIDIA tooling.

Service Level Excellence:

- Fast telephone response.
- Quick technical solutions.
- Efficient case management.

Best-in-Class Support Tools and Technology:

- Tooling performance experts.
- Materials database.
- Application calculators.

Services Provided:

- Tooling selection.
- Operating parameters.
- Troubleshooting.
- Process optimisation.
- Hardware support.

To learn more about Customer Application Support, contact your local Authorised Distributor or visit www.widia.com.

CAS

Our Customer Application Support (CAS) Team is the metalworking industry's leading help desk resource for tooling application solutions and problem resolution!

- Easy access to proven metalworking expertise.
- Service level excellence.
- Best-in-class application support tools and technology.

Convenient Access Options:

Originating Country	Language	Phone	Fax	E-mail
Australia	English	001-724-539-6921*	001-724-539-6830*	ap.techsupport@widia.com
Austria	German	0800 291630	0800 291631	eu.techsupport@widia.com
Belgium	English/French	0800 80410	0800 80411	eu.techsupport@widia.com
China	Chinese	400-889-2237	021-58342200	w-cn.techsupport@widia.com
Denmark	English	808 89295	808 89297	na.techsupport@widia.com
Finland	English	0800 919413	0800 919415	na.techsupport@widia.com
France	French	080 5540 379	080 5540 029	eu.techsupport@widia.com
Germany	German	0800 1015774	0800 0007531	eu.techsupport@widia.com
India	English	001-724539-6921*	001-724-539-6830*	ap.techsupport@widia.com
Israel	English	1809 449907	1809 439845	na.techsupport@widia.com
Italy	Italian	800 916568	800 917749	eu.techsupport@widia.com
Japan	English	001-724539-6921*	001-724-539-6830*	ap.techsupport@widia.com
Korea (South)	English	001-724539-6921*	001-724-539-6830*	ap.techsupport@widia.com
Malaysia	English	001-724539-6921*	001-724-539-6830*	ap.techsupport@widia.com
Netherlands	English	0800 0201131	0800 0201135	na.techsupport@widia.com
New Zealand	English	001-724539-6921*	001-724-539-6830*	ap.techsupport@widia.com
Norway	English	800 10081	800 10001	na.techsupport@widia.com
Poland	Polish	00800 4411943	00800 4411940	eu.techsupport@widia.com
Singapore	English	001-724539-6921*	001-724-539-6830*	ap.techsupport@widia.com
South Africa	English	0800 981644	0800 981645	na.techsupport@widia.com
Sweden	English	020798794	020790477	na.techsupport@widia.com
Taiwan	English	001-724539-6921*	001-724-539-6830*	ap.techsupport@widia.com
Thailand	English	001-724539-6921*	001-724-539-6830*	ap.techsupport@widia.com
United Kingdom	English	0800 028 2996	0800 028 5721	na.techsupport@widia.com
USA	English	888 539 5145	001-724-539-6830*	na.techsupport@widia.com

*Noted phone and fax numbers are not toll free.

To learn more about Customer Application Support, contact your local Authorised Distributor or visit www.widia.com.

WIDIA™ Branded Merchandise

SHOP. BUY. PROMOTE.

New WIDIA Branded Merchandise Available! Place Your Order Today!

Introducing a new line of WIDIA merchandise. Place an order for any of the following quality products with your Authorised WIDIA Distributor or visit www.widia.corpmerchandise.com.



To learn more, contact your local Authorised Distributor or visit www.widia.com.

Global Online Ordering Made Simple.

**Shopping for Branded Merchandise products online is safe, secure, and easy.
Just follow these simple steps:**



- Browse through the Branded Merchandise eStore by clicking on a department and then clicking on the products that interest you.
- Add items to your Cart.
- Register or verify your shopper information.
- Select your payment method and submit your order.
- Print your View Cart page or your Receipt.

To learn more, contact your local Authorised Distributor or visit www.widia.com.

WIDIA™ Social Media


Join our conversation.

Connect with us to get the latest information on our new products and promotions, read success stories, and view product videos.


<https://twitter.com/WIDIAProductGrp>



<https://www.facebook.com/WIDIAProductGrp>

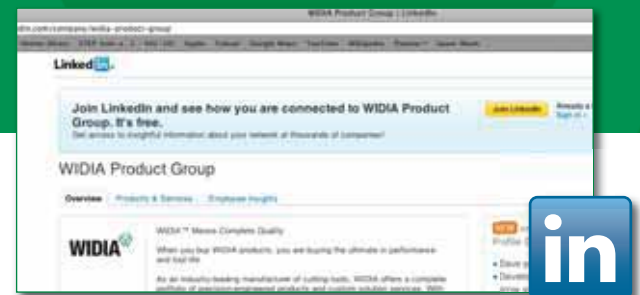


<http://www.linkedin.com/company/widia-product-group>

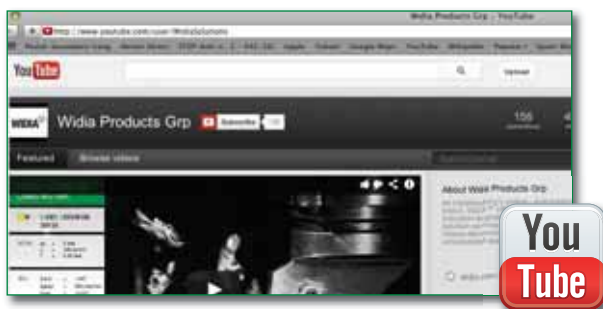

<http://www.youtube.com/user/WidiaSolutions>

WIDIA blogs can be read at <http://word.widia.com>.

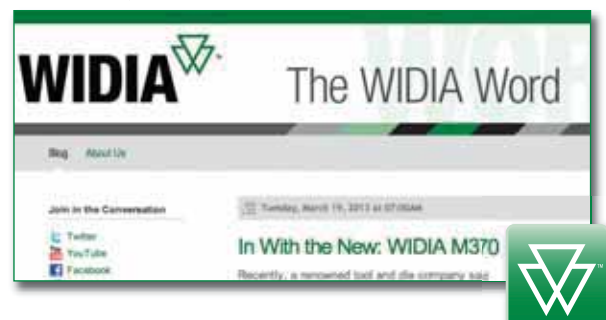

WIDIA™ Tapping Centers of Excellence

WIDIA is one of the largest producers of taps in world. Our modern manufacturing footprint is backed by three ISO-certified plants, all dedicated to upholding the high quality standards synonymous with WIDIA. With our own coating facility and centers focused on round tools, we can mass produce standard products — and custom manufacture special taps for your unique needs.



Greenfield Tap Plant (Massachusetts, USA)

- Capacity: 6 million pieces per year.
- Mass production of standard taps.

Lyndonville Tap Plant (Vermont, USA)

- Capacity: 2.5 million pieces per year.
- Standard taps; simple and complex special taps.

Asheboro Tap Plant (North Carolina, USA)

- Capacity: 600,000 pieces per year and increasing.
- Carbide taps; high-performance HSS-E-PM taps; and HSS-E, standard, and special taps.



State-of-the-art tap manufacturing equipment




To learn more about our Tapping Centers of Excellence, contact your local Authorised Distributor or visit www.widia.com.



Tapping

Taps Selection Guide	.A2–A7
High-Performance Solution for Multipurpose Tapping • VariTap	.A10–A26
High-Performance HSS-E-PM Victory Taps • WIDIA-GTD	.A28–A73
High-Performance Solid Carbide Taps • WIDIA-GTD	.A74–A89
High-Performance Thread Mills	.A90–A110
Technical Information	.A112–A139

★ Good
★★ Better
★★★ Best

★ Good ★★ Better ★★★ Best	hole		thread		coolant		size range min-max	grade/ coating	material				chamfer		helix angle	dimension	
	through	blind	cutting	forming	flood	through											
series									Carbide	HSS-E-PM	HSS-E	HSS	type	form			
GX Series Carbide Taps																	
 GX32	X		X		X		M6-M16	GP4535	X				plug	D	L15°	HA6535	
 GX33		X	X			X	M6-M16	GP4535	X				semi-bottom	C	45°	HA6535	
 GX35		X	X			X	M4-M16	GP4535	X				bottom-ing	E	0°	HA6535	
 GX39		X		X		X	M4-M10	GP4535	X				bottom-ing	E	—	HA6535	
 GX49		X		X		X	M4-M12	GN1515	X				bottom-ing	E	—	HA6535	
 GX10	X	X	X		X		M3-M16	WH16PG	X				semi-bottom	C	0°	HA6535	
GT Series High-Performance Taps																	
 GT00	X		X		X		M3-M20	WP31MG		X			plug	B	0°	DIN 371, 374,376	
 GT02		X	X		X		M3-M20	WP31MG		X			semi-bottom	C	25°	DIN 371, 374,376	
 GT04		X	X		X		M3-M20	WP36MG		X			semi-bottom	C	42°	DIN 371, 374,376	
 GT06	X	X	X		X		M3-M16	WS32MG		X			semi-bottom	C	0°	DIN 371, 374,376	
 GT10	X		X		X		M3-M20	WS32MG		X			plug	D	L8°	DIN 371, 376	
 GT12		X	X		X		M3-M20	WS32MG		X			semi-bottom	C	10°	DIN 371, 376	
 GT14	X		X		X		M3-M12	WN35MG		X			plug	B	0°	DIN 371, 376	
 GT16		X	X		X		M3-M12	WN35MG		X			semi-bottom	C	30°	DIN 371	
 GT20	X		X		X		M3-M42	GP6520, GM6515		X			plug	D	L15°	DIN 371, 374, 376	
 GT20	X		X		X		M24-M42	GP6520		X			plug	D	L15°	DIN 376, XL	
 GT21	X		X			X	M5-M16	GP6520, GM6515		X			plug	D	L15°	DIN 371, 376	
 GT22	X	X		X	X		M3-M16	WP31MG, WN38MG		X			semi-bottom	C	—	DIN 2174	

	P				M	K		N			S				H		page	recommended cutting parameters
	1, 2, 3, 4, 6, 7	5, 9, 10, 11	12, 13.1	13.2	14.1, 14.2, 14.3, 14.4	15, 16	17, 18, 19, 20	21	22, 23, 24, 25	26, 27, 28	31, 32	33, 34, 35	36	37	38.1, 38.2, 40.1, 40.2, 41.1	39.1, 41.2		
	Steel <35 HRC	Steel 36-48 HRC	PH and Ferritic Stainless Steel <35 HRC	PH and Ferritic Stainless Steel >35 HRC	Stainless Steel	Grey Cast Iron	Ductile Cast Iron	Wrought Aluminium	Cast Aluminium	Copper, Copper Alloys	Iron Based	Cobalt Based	Nickel Based	Titanium Alloys	Hardened Steels 49-55 HRC	Hardened Steels 56-68 HRC		
GX Series Carbide Taps (continued)																		
	★★★					★	★★										A76	A82
	★★★					★	★★										A77	A82
						★★★★	★★★★										A78	A82
	★★★																A79	A82
								★★★	★★								A80	A82
																★★★	A81	A82
GT Series High-Performance Taps (continued)																		
		★★★★		★★★★	★	★	★					★					A30	A57
		★★★★		★★★★	★	★	★					★					A31	A57
		★★★★		★★★★											★★★★		A32	A57
															★★★★		A33	A57
												★★★★	★★★★				A34	A57
												★★★★	★★★★				A35	A57
														★★★★			A36	A57
														★★★★			A37	A57
	★★★★		★★★★		★★★★		★★	★	★		★★						A38	A57
	★★★★		★★★★		★★★★		★★	★	★		★★						A52	A57
	★★★★		★★★★		★★★★		★★	★	★		★★						A39	A57
	★★★★							★★★★	★★								A40	A57

★ Good
★★ Better
★★★ Best


★ Good ★★ Better ★★★ Best	hole		thread		coolant		size range min-max	grade/ coating	material				chamfer		helix angle	dimension	
	through	blind	cutting	forming	flood	through											
series									carbide	HSS-E-PM	HSS-E	HSS	type	form			
GT Series High-Performance Taps (continued)																	
GT23	X	X		X		X	M5–M16	WP31MG, WN38MG		X			semi-bottom	C	—	DIN 2174	
GT30		X	X		X		M3–M42	GP6520, GM6515, GP6505		X			semi-bottom	C	45°	DIN 371, 374, 376	
GT30		X	X		X		M24–M42	GP6520		X			semi-bottom	C	45°	DIN 376, XL	
GT31		X	X			X	M5–M16	GP6520, GM6515		X			semi-bottom	C	45°	DIN 371, 376	
GT31		X	X			X	M24–M42	GP6520		X			semi-bottom	C	45°	DIN 376, XL	
GT32		X	X		X		M5–M16	GP6520		X			bottoming	E	45°	DIN 371, 374,376	
GT33		X	X			X	M5–M16	GP6520		X			bottoming	E	45°	DIN 371, 374,376	
GT40	X	X	X		X		M4–M22	GP6520		X			semi-bottom	C	0°	DIN 371, 376	
GT41	X	X	X			X	M4–M20	GP6520		X			semi-bottom	C	0°	DIN 371, 376	
GT42		X	X		X		M5–M16	GP6520		X			bottoming	E	0°	DIN 371, 374,376	
GT43		X	X			X	M5–M16	GP6520		X			bottoming	E	0°	DIN 371, 374,376	
GT50		X	X		X		M24–M42	GP6520		X			semi-bottom	C	15°	DIN 376, XL	
GT51		X	X			X	M24–M42	GP6520		X			semi-bottom	C	15°	DIN 376, XL	
GT70	X		X		X		M3–M16	WN48EG		X			plug	B	0°	DIN 371, 376	
GT80		X	X		X		M3–M20	WN48EG		X			semi-bottom	C	45°	DIN 371, 376	
VariTap™ High-Performance Multiapplication Taps																	
VTSP060	X		X		X		#4-1"	WP49EG, WU41EG			X		plug	B	0°	DIN 371, 376	
VTSP065	X		X		X		M2–M36	WP42EG, WU41EG, WP49EG, WU40EG			X		plug	B	0°	DIN 371, 374,376	
VTSP075	X		X		X		M3–M20	WU41EG, WU40EG			X		plug	B	0°	JIS	
VTSFT60		X	X		X		#4-1"	WP49EG, WU41EG			X		semi-bottom	C	45°	DIN 371, 376	
VTSFT65		X	X		X		M2–M36	WP42EG, WU41EG, WP49EG, WU40EG			X		semi-bottom	C	45°	DIN 371, 374,376	
VTSFT65		X	X		X		M3–M20	WP42EG			X		bottoming	E	45°	DIN 371, 374,376	
VTSFT75		X	X		X		M3–M20	WU41EG, WU40EG			X		semi-bottom	C	45°	JIS	

	P				M	K		N			S				H		page	recommended cutting parameters
	1, 2, 3, 4, 6, 7	5, 9, 10, 11	12, 13.1	13.2	14.1, 14.2, 14.3, 14.4	15, 16	17, 18, 19, 20	21	22, 23, 24, 25	26, 27, 28	31, 32	33, 34, 35	36	37	38.1, 38.2, 40.1, 40.2, 41.1	39.1, 41.2		
	Steel <35 HRC	Steel 36-48 HRC	PH and Ferritic Stainless Steel <35 HRC	PH and Ferritic Stainless Steel >35 HRC	Stainless Steel	Grey Cast Iron	Ductile Cast Iron	Wrought Aluminium	Cast Aluminium	Copper, Copper Alloys	Iron Based	Cobalt Based	Nickel Based	Titanium Alloys	Hardened Steels 49-55 HRC	Hardened Steels 56-68 HRC		
GT Series High-Performance Taps (continued)																		
	★★★							★★★	★★								A41	A57
	★★★		★★★		★★★		★★	★	★		★★						A42	A57
	★★★		★★★		★★★		★★	★	★		★★						A53	A57
	★★★		★★★		★★★		★★	★	★		★★						A43	A57
	★★★		★★★		★★★		★★	★	★		★★						A54	A57
	★★★		★★★		★★★		★★	★	★		★★						A44	A57
	★★★		★★★		★★★		★★	★	★		★★						A45	A57
						★★★★	★★★★		★★★★	★★							A46	A57
						★★★★	★★★★		★★★★	★★							A47	A57
						★★★★	★★★★		★★★★	★★							A48	A57
						★★★★	★★★★		★★★★	★★							A49	A57
	★★★		★★★				★★										A55	A57
	★★★		★★★				★★										A56	A57
								★★★★	★	★							A50	A57
								★★★★									A51	A57
VariTap™ High-Performance Multiapplication Taps (continued)																		
	★★	★	★		★★	★	★★	★	★★	★★	★						A13-A14	A26
	★★	★	★		★★	★	★★	★	★★	★★	★						A15-A16	A26
	★★	★	★		★★	★	★★	★	★★	★★	★						A17	A26
	★★	★	★		★★	★	★★	★	★★	★★	★						A19-A21	A26
	★★	★	★		★★	★	★★	★	★★	★★	★						A22-A23	A26
	★★	★	★		★★	★	★★	★	★★	★★	★						A24	A26
	★★	★	★		★★	★	★★	★	★★	★★	★						A25	A26

- ★ Good
- ★★ Better
- ★★★ Best

★ Good ★★ Better ★★★ Best	hole		thread		coolant		size range min-max	grade/ coating	material				chamfer		helix angle	dimension
									carbide	HSS-E-PM	HSS-E	HSS	type	form		
	through	blind	cutting	forming	flood	through										
Series																
GTD Series Solid Thread Milling																
 GTM11	X	X	X			X	M3-M20	6535 HA	X				—	—	WU13PG	HA6535
 GTM21	X	X	X			X	#10-5/8"	6535 HA	X				—	—	WU12PV	HA6535
 GTM21	X	X	X			X	M5-M16	6535 HA	X				—	—	WU12PV	HA6535
 GTM31	X	X	X			X	1/4-5/8"	6535 HA	X				—	—	WU12PV	HA6535
 GTM31	X	X	X			X	M4-M16	6535 HA	X				—	—	WU12PV	HA6535
 GTM41	X	X	X			X	1/4-3/4"	6535 HA	X				—	—	WU16PV	HA6535
 GTM41	X	X	X			X	M6-M24	6535 HA	X				—	—	WU16PV	HA6535
 GTM41LH	X	X	X			X	M6-M12	6535 HA	X				—	—	WU16PV	HA6535

	P				M	K		N			S				H		page	recommended cutting parameters
	1, 2, 3, 4, 6, 7	5, 9, 10, 11	12, 13.1	13.2	14.1, 14.2, 14.3, 14.4	15, 16	17, 18, 19, 20	21	22, 23, 24, 25	26, 27, 28	31, 32	33, 34, 35	36	37	38.1, 38.2, 40.1, 40.2, 41.1	39.1, 41.2		
	Steel <35 HRC	Steel 36–48 HRC	PH and Ferritic Stainless Steel <35 HRC	PH and Ferritic Stainless Steel >35 HRC	Stainless Steel	Grey Cast Iron	Ductile Cast Iron	Wrought Aluminium	Cast Aluminium	Copper, Copper Alloys	Iron Based	Cobalt Based	Nickel Based	Titanium Alloys	Hardened Steels 49–55 HRC	Hardened Steels 56–68 HRC		
GTD Series Solid Thread Milling (continued)																		
	★★★	★★★	★★★	★★★	★★★	★★★	★★★	★★★	★★★	★★★	★	★	★	★			A96	A104
	★★★	★★★	★★★	★★★	★★★	★★★	★★★	★★★	★★★	★★★	★★★	★★★	★★★	★★★			A97	A104
	★★★	★★★	★★★	★★★	★★★	★★★	★★★	★★★	★★★	★★★	★★★	★★★	★★★	★★★			A98	A104
						★★★	★★★	★★★	★★★								A99	A104
						★★★	★★★	★★★	★★★								A100	A104
	★★★	★★★	★★★	★★★	★★★	★★★	★★★	★★★	★★★	★★★					★★★	★★★	A101	A105
	★★★	★★★	★★★	★★★	★★★	★★★	★★★	★★★	★★★	★★★					★★★	★★★	A102	A105
											★★★	★★★	★★★	★★★	★★★	★★★	A103	A105




Coatings are designed for optimised tapping performance in specific materials.

P	Steel
M	Stainless Steel
K	Cast Iron
N	Non-Ferrous Materials
S	High-Temp Alloys
H	Hardened Materials

wear resistance ← → toughness


Grade	Coating	Description		05	10	15	20	25	30	35	40	45
GM6515		Coated HSS-E-PM, PVD heat- and wear-resistant high-vanadium cobalt powder metal HSS substrate. Coating consists of low-friction CrC/C over wear-resistant TiN base layer. Use for tapping stainless steel and non-ferrous materials.	M									
			N									
GN1515		Coated carbide, PVD two-layer coating over fine-grain carbide. Coating consists of low-friction CrC/C over wear-resistant TiN. CrC/C resists galling of non-ferrous materials to the tap. Provides superior performance for tapping cast aluminium and other non-ferrous materials.	N									
GP4535		Coated carbide, PVD multilayer coating with TiAlN and TiN over a high-strength carbide substrate specifically designed for tap application. Use in steel up to 32 HRC and cast iron at four times faster speeds than HSS-E-PM taps.	P									
			K									
GP6520		Coated HSS-E-PM, PVD heat- and wear-resistant high-vanadium cobalt powder metal HSS substrate coated with wear-resistant TiCN base layer. Use in steel, cast iron, and cast aluminium with silicon.	P									
			K									
WH16PG		Coated carbide, PVD two-layer coating with heat-resistant TiAlN base layer and low-friction MoS ₂ top layer over carbide substrate. Use in hardened steel 55–63 HRC.										
			H									
WN35MG		Coated HSS-E-PM, PVD powder metal HSS-E substrate with two-layer coating. TiN base layer and DLC top layer that resists galling of non-ferrous materials to the tap. Use for tapping titanium. Not recommended for steel.										
			S									
WN38MG		Coated HSS-E-PM, PVD powder metal HSS-E substrate with DLC coating. Use for form tapping aluminium. Not recommended for steel.										
			N									
WN48EG		Coated HSS-E, PVD lower vanadium HSS-E substrate with DLC coating. Use for tapping non-ferrous materials with low cutting temperatures like wrought aluminium. Not recommended for steel.										
			N									
WP31MG		Coated HSS-E-PM, PVD powder metal HSS-E substrate with TiN coating. Use for tapping steel 32–44 HRC and for forming threads in steel to 32 HRC.	P									
WP42EG		Coated HSS-E substrate with TiCN PVD layer. Use in multiple applications, including steel, stainless steel, ductile cast iron, and cast aluminium. WP42EG is more abrasion resistant than WU41EG.	P									
			M									
			K									
			N									

NEW!



Coatings are designed for optimised tapping performance in specific materials.

P	Steel
M	Stainless Steel
K	Cast Iron
N	Non-Ferrous Materials
S	High-Temp Alloys
H	Hardened Materials

			wear resistance ← → toughness										
				05	10	15	20	25	30	35	40	45	
Grade	NEW!	WP49EG		HSS-E substrate with black oxide surface treatment. Use in a variety of materials, including steel, stainless steel, and ductile iron. Not recommended for non-ferrous materials.									
			P										
		M											
		K											
		WS32MG		Coated HSS-E-PM, PVD heat- and wear-resistant high-vanadium cobalt powder metal HSS substrate with high-hardness TiCN coating. Use when tapping heat-treated steel 44–55 HRC and cobalt- or nickel-based heat-resistant alloys.									

High-Performance Solution for Multipurpose Tapping • **VariTap™**

VariTap is the new high-performance multipurpose tapping solution from WIDIA™. The VariTap has an optimised geometry and is capable of working with a wide variety of ductile materials — including carbon and alloy steels, stainless steels, ductile iron, and cast aluminium. This new tool reduces inventory costs without losing the benefit of high-quality, consistent tool life in threading and tapping.

VariTap

- Ideal for customers who have a variety of materials to machine.
- Manufactured from high-vanadium HSS-E to provide long and consistent life.
- Geometry designed to allow tapping of a wide variety of ductile materials: carbon and alloy steels, stainless steels, ductile iron, and cast aluminium.
- Unique spiral point geometry provides low tapping torque while pushing chips ahead of the tap in through holes.

With a wide range of inch and metric standard sizes, pitch diameter limits, classes of fit, chamfer styles, and coatings, the new VariTap™ offers the most expansive portfolio of multipurpose taps available in the market.



- Spiral flute geometry optimised to provide efficient chip ejection in blind holes.
- Can be used on both synchronous and non-synchronous tapping machines.
- Proprietary PVD coatings deposited in a state-of-the-art in-house coating center yield reliable performance.

Multipurpose Tap for Steel, Stainless Steel, Cast Aluminium, and Ductile Iron




Unique spiral point design

Cutting edge angles and positive rake face straight flute optimised for tapping multiple materials.

Multiple tap dimension options

ANSI, DIN, JIS, and DIN/ANSI.

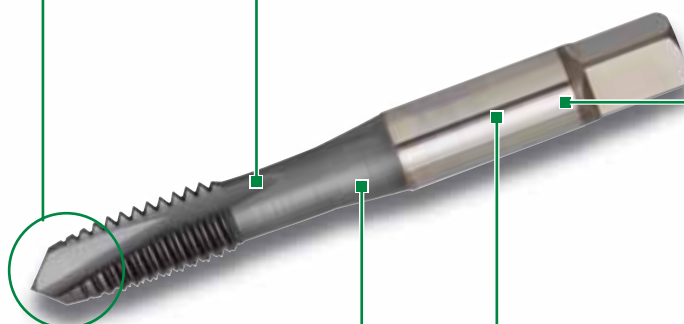

Precision ground shanks

Low runout.



High-vanadium HSS-E

Improved wear characteristics and longer tool life.

PVD coatings and surface treatments


For use with various workpiece materials:

WP42EG TiCN	WP41EG TiN	WP49EG Oxide	WU40EG Bright
-----------------------	----------------------	------------------------	-------------------------

- WU41EG TiN
- WP49EG oxide



High-Performance Taps


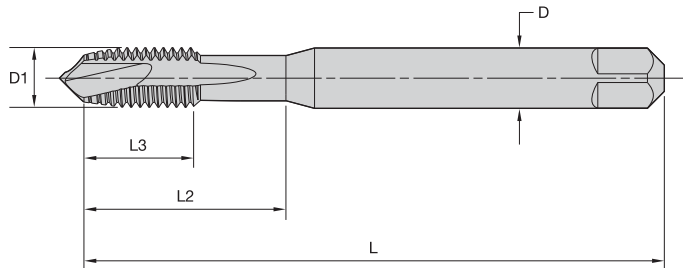


- first choice
- alternate choice

Shank Tolerance

D mm	tolerance h9
1-3	+0, -0,025
>3-6	+0, -0,030
>6-10	+0, -0,036
>10-18	+0, -0,043
>18-30	+0, -0,052

■ VT-SPO • Form B Plug Chamfer • Machine Screw and Fractional • DIN 371 and 376



metric dimensions

		D1 size	L	L3	L2	D	number of flutes	dimension standard	class of fit
WU41EG	WP49EG								
VTSP06005	VTSP06005	4 - 40	56	8	18	3,5	2	DIN 371	2B
VTSP06007	VTSP06007	5 - 40	56	9	20	4,0	2	DIN 371	2B
VTSP06008	VTSP06008	6 - 32	56	9	20	4,0	2	DIN 371	2B
VTSP06010	VTSP06010	6 - 40	56	9	20	4,0	2	DIN 371	2B
VTSP06011	VTSP06011	8 - 32	63	11	21	4,5	2	DIN 371	2B
VTSP06013	VTSP06013	10 - 24	70	12	25	6,0	2	DIN 371	2B
VTSP06014	VTSP06014	10 - 32	70	12	25	6,0	2	DIN 371	2B
VTSP06016	VTSP06016	1/4 - 20	80	15	30	7,0	3	DIN 371	2B
VTSP06017	VTSP06017	1/4 - 28	80	15	30	7,0	3	DIN 371	2B
VTSP06019	VTSP06019	5/16 - 18	90	15	35	8,0	3	DIN 371	2B
VTSP06020	VTSP06020	5/16 - 24	90	15	35	8,0	3	DIN 371	2B
VTSP06022	VTSP06022	3/8 - 16	100	19	39	10,0	3	DIN 371	2B
VTSP06023	VTSP06023	3/8 - 24	100	19	39	10,0	3	DIN 371	2B
VTSP06025	VTSP06025	7/16 - 14	100	18	41	8,0	3	DIN 376	2B
VTSP06026	VTSP06026	7/16 - 20	100	18	41	8,0	3	DIN 376	2B
VTSP06028	VTSP06028	1/2 - 13	110	23	47	9,0	3	DIN 376	2B
VTSP06029	VTSP06029	1/2 - 20	110	23	47	9,0	3	DIN 376	2B
VTSP06031	VTSP06031	9/16 - 12	110	25	53	11,0	3	DIN 376	2B
VTSP06032	VTSP06032	9/16 - 18	110	25	53	11,0	3	DIN 376	2B
VTSP06033	VTSP06033	5/8 - 11	110	24	51	12,0	3	DIN 376	2B
VTSP06034	VTSP06034	5/8 - 18	110	24	51	12,0	3	DIN 376	2B
VTSP06035	VTSP06035	3/4 - 10	140	30	64	16,0	3	DIN 376	2B
VTSP06036	VTSP06036	3/4 - 16	140	30	64	16,0	3	DIN 376	2B
VTSP06037	VTSP06037	7/8 - 9	140	34	71	18,0	3	DIN 376	2B
VTSP06038	VTSP06038	7/8 - 14	140	34	71	18,0	3	DIN 376	2B
VTSP06039	VTSP06039	1 - 8	160	38	81	18,0	3	DIN 376	2B
VTSP06040	VTSP06040	1 - 12	160	38	81	18,0	3	DIN 376	2B

High-Performance Taps


VariTap™ Spiral Point HSS-E Taps • Through Holes



- WU41EG TiN
- WP49EG oxide



High-Performance Taps


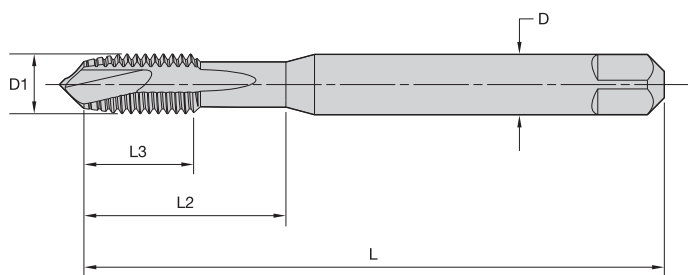


- first choice
- alternate choice

Shank Tolerance

D mm	tolerance h9
1-3	+0, -0,025
>3-6	+0, -0,030
>6-10	+0, -0,036
>10-18	+0, -0,043
>18-30	+0, -0,052

■ VT-SPO • Form B Plug Chamfer • UNJC/UNJF • Inch DIN 371 and 376



		metric dimensions					number of flutes	dimension standard	class of fit
		D1 size	L	L3	L2	D			
WU41EG	WP49EG								
VTSP06006	VTSP06006	4 - 40	56	8	18	3,5	2	DIN 371	3B
VTSP06009	VTSP06009	6 - 32	56	9	20	4,0	2	DIN 371	3B
VTSP06012	VTSP06012	8 - 32	63	11	21	4,5	2	DIN 371	3B
VTSP06015	VTSP06015	10 - 32	70	12	25	6,0	2	DIN 371	3B
VTSP06018	VTSP06018	1/4 - 28	80	15	30	7,0	3	DIN 371	3B
VTSP06021	VTSP06021	5/16 - 24	90	15	35	8,0	3	DIN 371	3B
VTSP06024	VTSP06024	3/8 - 24	100	19	39	10,0	3	DIN 371	3B
VTSP06027	VTSP06027	7/16 - 20	100	18	41	8,0	3	DIN 376	3B
VTSP06030	VTSP06030	1/2 - 20	110	23	47	9,0	3	DIN 376	3B


- WP42EG TiCN
- WU41EG TiN
- WP49EG oxide
- WU40EG bright


HSS-E

DIN 371
DIN 374
DIN 376

6H
6G
M
MF

High-Performance Taps




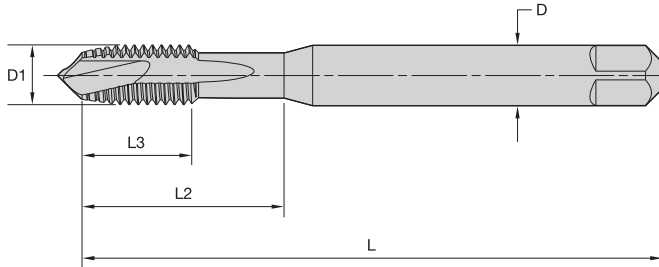


- first choice
- alternate choice

Shank Tolerance

D mm	tolerance h9
1-3	+0, -0,025
>3-6	+0, -0,030
>6-10	+0, -0,036
>10-18	+0, -0,043
>18-30	+0, -0,052

■ VT-SPO • Form B Plug Chamfer • Metric DIN 371, 374, and 376

				metric dimensions					number of flutes	dimension standard	class of fit
				D1 size	L	L3	L2	D			
											
WP42EG	WU41EG	WP49EG	WU40EG								
—	—	VTSP06506	—	M2 X 0,4	45	7	13	2,8	2	DIN 371	6G
VTSP06505	VTSP06505	VTSP06505	VTSP06505	M2 X 0,4	45	7	13	2,8	2	DIN 371	6H
—	—	VTSP06507	—	M2,2 X 0,45	45	7	13	2,8	2	DIN 371	6H
—	—	VTSP06509	—	M2,5 X 0,45	50	7	15	2,8	2	DIN 371	6G
—	VTSP06508	VTSP06508	VTSP06508	M2,5 X 0,45	50	7	15	2,8	2	DIN 371	6H
—	—	VTSP06545	VTSP06545	M3 X 0,35	56	8	—	2,2	2	DIN 374	6H
—	—	VTSP06511	—	M3 X 0,5	56	8	18	3,5	2	DIN 371	6G
VTSP06510	VTSP06510	VTSP06510	VTSP06510	M3 X 0,5	56	8	18	3,5	2	DIN 371	6H
—	VTSP06525	VTSP06525	VTSP06525	M3 X 0,5	56	8	—	2,2	2	DIN 376	6H
—	VTSP06512	VTSP06512	VTSP06512	M3,5 X 0,6	56	9	20	4,0	2	DIN 371	6H
—	—	VTSP06546	VTSP06546	M4 X 0,5	63	10	21	2,8	2	DIN 374	6H
—	—	VTSP06514	—	M4 X 0,7	63	11	21	4,5	2	DIN 371	6G
VTSP06513	VTSP06513	VTSP06513	VTSP06513	M4 X 0,7	63	11	21	4,5	2	DIN 371	6H
—	VTSP06526	VTSP06526	VTSP06526	M4 X 0,7	63	10	21	2,8	2	DIN 376	6H
—	—	VTSP06547	VTSP06547	M5 X 0,5	70	12	25	3,5	2	DIN 374	6H
—	—	VTSP06516	—	M5 X 0,8	70	12	25	6,0	2	DIN 371	6G
VTSP06515	VTSP06515	VTSP06515	VTSP06515	M5 X 0,8	70	12	25	6,0	2	DIN 371	6H
—	VTSP06527	VTSP06527	VTSP06527	M5 X 0,8	70	12	25	3,5	2	DIN 376	6H
—	—	VTSP06548	VTSP06548	M6 X 0,5	80	12	30	4,5	3	DIN 374	6H
—	—	VTSP06549	VTSP06549	M6 X 0,75	80	12	30	4,5	3	DIN 374	6H
—	—	VTSP06518	—	M6 X 1	80	12	30	6,0	3	DIN 371	6G
VTSP06517	VTSP06517	VTSP06517	VTSP06517	M6 X 1	80	12	30	6,0	3	DIN 371	6H
—	VTSP06528	VTSP06528	VTSP06528	M6 X 1	80	12	30	4,5	3	DIN 376	6H
—	—	VTSP06550	VTSP06550	M7 X 0,75	80	12	30	5,5	3	DIN 374	6H
—	—	VTSP06520	—	M7 X 1	80	12	30	7,0	3	DIN 371	6G
VTSP06519	VTSP06519	VTSP06519	VTSP06519	M7 X 1	80	12	30	7,0	3	DIN 371	6H
—	—	VTSP06551	VTSP06551	M8 X 0,75	80	12	30	6,0	3	DIN 374	6H
—	—	VTSP06552	VTSP06552	M8 X 1	90	15	35	6,0	3	DIN 374	6H
—	—	VTSP06522	—	M8 X 1,25	90	15	35	8,0	3	DIN 371	6G
VTSP06521	VTSP06521	VTSP06521	VTSP06521	M8 X 1,25	90	15	35	8,0	3	DIN 371	6H
—	VTSP06529	VTSP06529	VTSP06529	M8 X 1,25	90	15	35	6,0	3	DIN 376	6H
—	—	VTSP06553	VTSP06553	M10 X 0,75	90	15	35	7,0	3	DIN 374	6H

(continued)





High-Performance Taps

VariTap™ Spiral Point HSS-E Taps • Through Holes




(VT-SPO • Form B Plug Chamfer • Metric DIN 371, 374, and 376 continued)

High-Performance Taps

				metric dimensions					number of flutes	dimension standard	class of fit
WP42EG	WU41EG	WP49EG	WU40EG	D1 size	L	L3	L2	D			
—	—	VTSP06554	VTSP06554	M10 X 1	90	15	35	7,0	3	DIN 374	6H
—	—	VTSP06555	VTSP06555	M10 X 1,25	100	18	39	7,0	3	DIN 374	6H
VTSP06523	VTSP06523	VTSP06524	—	M10 X 1,5	100	18	39	10,0	3	DIN 371	6G
		VTSP06523	VTSP06523	M10 X 1,5	100	18	39	10,0	3	DIN 371	6H
—	VTSP06530	VTSP06530	VTSP06530	M10 X 1,5	100	18	39	7,0	3	DIN 376	6H
		VTSP06556	VTSP06556	M11 X 1	90	15	36	8,0	3	DIN 374	6H
—	—	VTSP06557	VTSP06557	M12 X 1	100	21	39	9,0	3	DIN 374	6H
—	—	VTSP06558	VTSP06558	M12 X 1,25	100	21	39	9,0	3	DIN 374	6H
—	—	VTSP06559	VTSP06559	M12 X 1,5	100	21	39	9,0	3	DIN 374	6H
		VTSP06532	—	M12 X 1,75	110	21	44	9,0	3	DIN 376	6G
VTSP06531	VTSP06531	VTSP06531	VTSP06531	M12 X 1,75	110	21	44	9,0	3	DIN 376	6H
—	—	VTSP06560	VTSP06560	M14 X 1	100	21	47	11,0	3	DIN 374	6H
—	—	VTSP06561	VTSP06561	M14 X 1,25	100	21	47	11,0	3	DIN 374	6H
		VTSP06562	VTSP06562	M14 X 1,5	100	21	47	11,0	3	DIN 374	6H
VTSP06533	VTSP06533	VTSP06534	—	M14 X 2	110	24	52	11,0	3	DIN 376	6G
		VTSP06533	VTSP06533	M14 X 2	110	24	52	11,0	3	DIN 376	6H
—	—	VTSP06563	VTSP06563	M16 X 1	100	21	46	12,0	3	DIN 374	6H
		VTSP06564	VTSP06564	M16 X 1,5	100	21	46	12,0	3	DIN 374	6H
VTSP06535	VTSP06535	VTSP06536	—	M16 X 2	110	24	51	12,0	3	DIN 376	6G
		VTSP06535	VTSP06535	M16 X 2	110	24	51	12,0	3	DIN 376	6H
—	—	VTSP06565	VTSP06565	M18 X 1	110	21	50	14,0	3	DIN 374	6H
		VTSP06566	VTSP06566	M18 X 1,5	110	21	50	14,0	3	DIN 374	6H
VTSP06537	VTSP06537	VTSP06567	VTSP06567	M18 X 2	125	30	58	14,0	3	DIN 374	6H
		VTSP06537	VTSP06537	M18 X 2,5	125	30	58	14,0	3	DIN 376	6H
—	—	VTSP06568	VTSP06568	M20 X 1	125	24	56	16,0	3	DIN 374	6H
		VTSP06569	VTSP06569	M20 X 1,5	125	24	56	16,0	3	DIN 374	6H
VTSP06538	VTSP06538	VTSP06570	VTSP06570	M20 X 2	140	30	64	16,0	3	DIN 374	6H
		VTSP06538	VTSP06538	M20 X 2,5	140	30	64	16,0	3	DIN 376	6H
—	—	VTSP06571	VTSP06571	M22 X 1,5	125	24	62	18,0	3	DIN 374	6H
		—	VTSP06572	M22 X 2	140	30	70	18,0	3	DIN 374	6H
VTSP06539	VTSP06539	VTSP06539	VTSP06539	M22 X 2,5	140	30	70	18,0	3	DIN 376	6H
—	—	VTSP06573	VTSP06573	M24 X 1,5	140	28	67	18,0	3	DIN 374	6H
VTSP06540	VTSP06540	—	VTSP06574	M24 X 2	140	30	67	18,0	3	DIN 374	6H
		VTSP06540	VTSP06540	M24 X 3	160	36	77	18,0	3	DIN 376	6H
—	VTSP06541	VTSP06541	VTSP06541	M27 X 3	160	36	82	20,0	4	DIN 376	6H
—	—	—	VTSP06575	M30 X 2	150	28	80	22,0	4	DIN 374	6H
—	VTSP06542	VTSP06542	VTSP06542	M30 X 3,5	180	42	91	22,0	4	DIN 376	6H
		VTSP06543	—	M33 X 3,5	180	42	100	25,0	4	DIN 376	6H
—	—	VTSP06544	—	M36 X 4	200	48	110	28,0	4	DIN 376	6H



- WU41EG TiN
- WU40EG bright

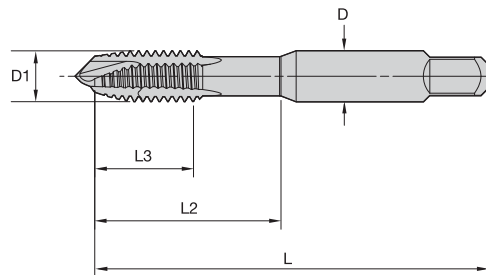

- first choice
- alternate choice


Shank Tolerance

D mm	tolerance h9
1-3	+0, -0,025
>3-6	+0, -0,030
>6-10	+0, -0,036
>10-18	+0, -0,043
>18-30	+0, -0,052

VT-SPO • Form B Plug Chamfer • Metric • JIS


		metric dimensions					number of flutes	dimension standard	tap class
		D1 size	L	L3	L2	D			
WU41EG	WU40EG								
VTSP07505	VTSP07505	M3 X 0,5	46	11	19	4,0	2	JIS	ISO 2
VTSP07506	VTSP07506	M4 X 0,7	52	13	21	5,0	2	JIS	ISO 2
VTSP07507	VTSP07507	M5 X 0,8	60	16	24	5,5	2	JIS	ISO 2
VTSP07508	VTSP07508	M6 X 1	62	19	29	6,0	3	JIS	ISO 2
VTSP07509	VTSP07509	M8 X 1,25	70	22	37	6,2	3	JIS	ISO 2
VTSP07510	VTSP07510	M10 X 1,5	75	24	41	7,0	3	JIS	ISO 2
—	VTSP07511	M12 X 1,25	82	29	48	8,5	3	JIS	ISO 2
—	VTSP07512	M12 X 1,75	82	29	48	8,5	3	JIS	ISO 2
—	VTSP07513	M12 X 1,5	82	29	48	8,5	3	JIS	ISO 2
—	VTSP07514	M14 X 2	88	30	48	10,5	3	JIS	ISO 2
—	VTSP07515	M14 X 1,5	88	30	48	10,5	3	JIS	ISO 2
—	VTSP07516	M16 X 2	95	32	52	12,5	3	JIS	ISO 2
—	VTSP07517	M16 X 1,5	95	32	52	12,5	3	JIS	ISO 2
—	VTSP07518	M18 X 2,5	100	37	55	14,0	3	JIS	ISO 2
—	VTSP07519	M20 X 2,5	105	37	60	15,0	3	JIS	ISO 2

Multipurpose Tap for Steel, Stainless Steel, Cast Aluminium, and Ductile Iron

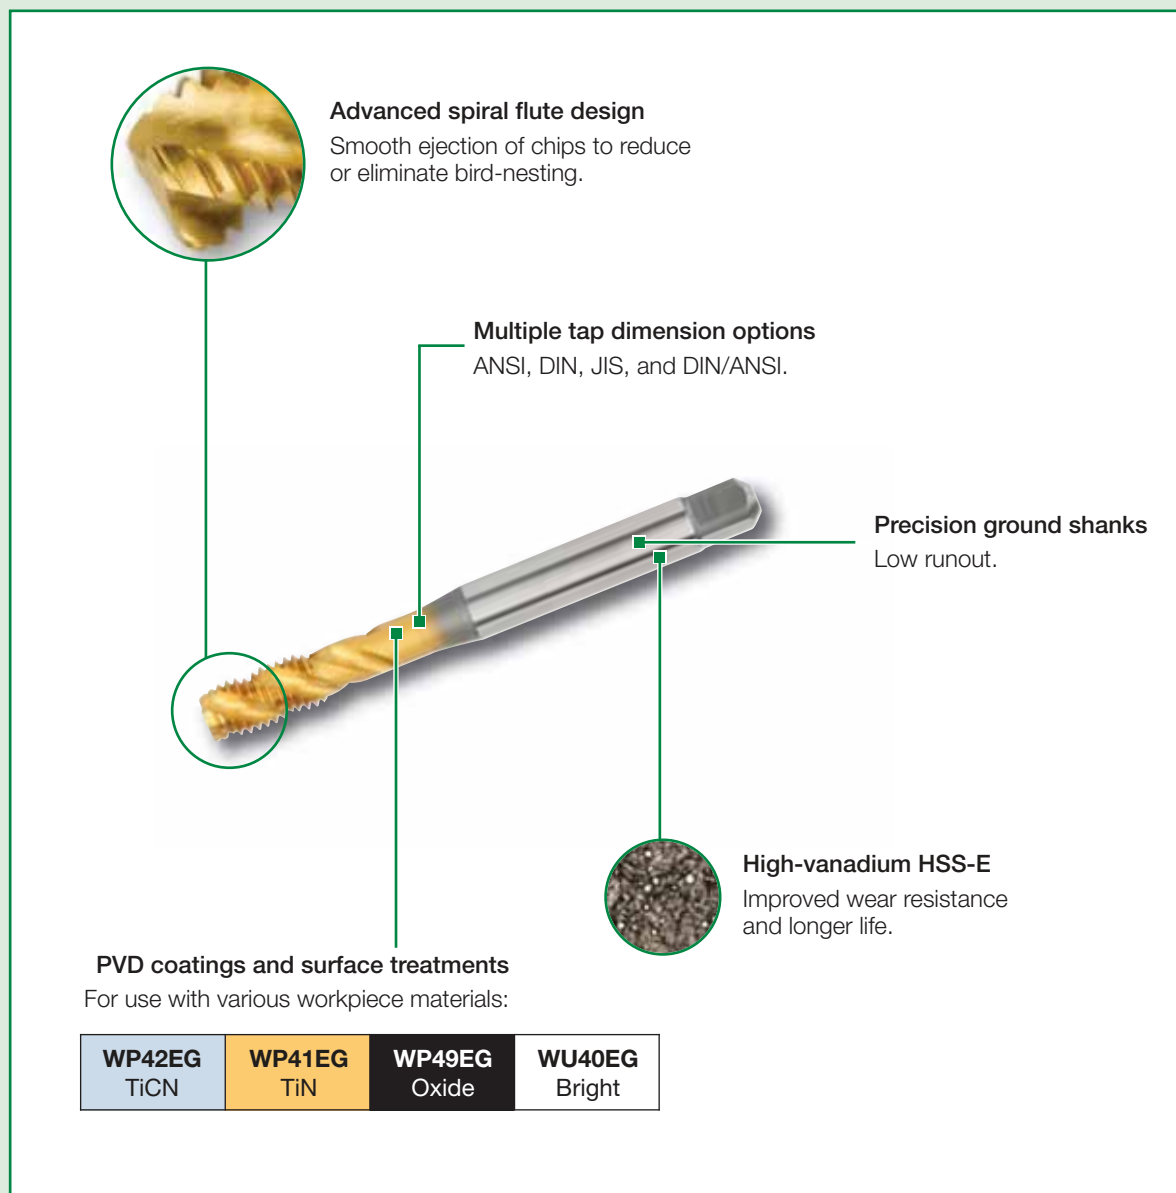

Advanced spiral flute design
Smooth ejection of chips to reduce or eliminate bird-nesting.

Multiple tap dimension options
ANSI, DIN, JIS, and DIN/ANSI.


Precision ground shanks
Low runout.

High-vanadium HSS-E
Improved wear resistance and longer life.

PVD coatings and surface treatments
For use with various workpiece materials:

WP42EG TiCN	WP41EG TiN	WP49EG Oxide	WU40EG Bright
-----------------------	----------------------	------------------------	-------------------------



- WU41EG TiN
- WP49EG oxide

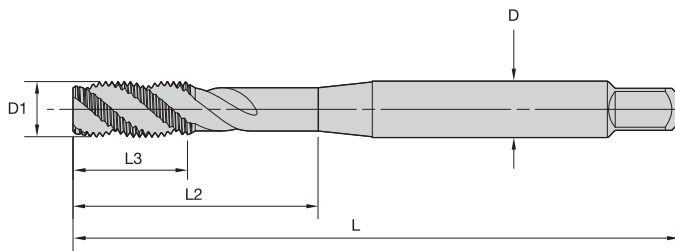

- first choice
- alternate choice

Shank Tolerance	
D mm	tolerance h9
1-3	+0, -0,025
>3-6	+0, -0,030
>6-10	+0, -0,036
>10-18	+0, -0,043
>18-30	+0, -0,052

■ VT-SFT • Form C Semi-Bottoming Chamfer • Machine Screw and Fractional • DIN 371 and 376



		metric dimensions					number of flutes	dimension standard	class of fit
		D1 size	L	L3	L2	D			
WU41EG	WP49EG								
VTSFT6005	VTSFT6005	4 - 40	56	8	18	3,5	2	DIN 371	2B
VTSFT6007	VTSFT6007	5 - 40	56	9	20	4,0	2	DIN 371	2B
VTSFT6008	VTSFT6008	6 - 32	56	9	20	4,0	2	DIN 371	2B
VTSFT6010	VTSFT6010	6 - 40	56	9	20	4,0	2	DIN 371	2B
VTSFT6011	VTSFT6011	8 - 32	63	11	21	4,5	3	DIN 371	2B
VTSFT6013	VTSFT6013	10 - 24	70	12	25	6,0	3	DIN 371	2B
VTSFT6014	VTSFT6014	10 - 32	70	12	25	6,0	3	DIN 371	2B
VTSFT6016	VTSFT6016	1/4 - 20	80	15	30	7,0	3	DIN 371	2B
VTSFT6017	VTSFT6017	1/4 - 28	80	15	30	7,0	3	DIN 371	2B
VTSFT6019	VTSFT6019	5/16 - 18	90	15	35	8,0	3	DIN 371	2B
VTSFT6020	VTSFT6020	5/16 - 24	90	15	35	8,0	3	DIN 371	2B
VTSFT6022	VTSFT6022	3/8 - 16	100	19	39	10,0	3	DIN 371	2B
VTSFT6023	VTSFT6023	3/8 - 24	100	19	39	10,0	3	DIN 371	2B
VTSFT6025	VTSFT6025	7/16 - 14	100	18	41	8,0	3	DIN 371	2B
VTSFT6026	VTSFT6026	7/16 - 20	100	18	41	8,0	3	DIN 376	2B
VTSFT6028	VTSFT6028	1/2 - 13	110	23	40	9,0	3	DIN 376	2B
VTSFT6029	VTSFT6029	1/2 - 20	110	23	40	9,0	3	DIN 376	2B
VTSFT6031	VTSFT6031	9/16 - 12	110	25	32	11,0	3	DIN 376	2B
VTSFT6032	VTSFT6032	9/16 - 18	110	25	32	11,0	3	DIN 376	2B

(continued)



High-Performance Taps

VariTap™ Spiral Flute HSS-E Taps • Blind Holes



(VT-SFT • Form C Semi-Bottoming Chamfer • Machine Screw and Fractional • DIN 371 and 376 continued)

High-Performance Taps



		metric dimensions					number of flutes	dimension standard	class of fit
WU41EG	WP49EG	D1 size	L	L3	L2	D			
VTSFT6033	VTSFT6033	5/8 - 11	110	24	35	12,0	3	DIN 376	2B
VTSFT6034	VTSFT6034	5/8 - 18	110	24	35	12,0	3	DIN 376	2B
VTSFT6035	VTSFT6035	3/4 - 10	140	30	46	16,0	4	DIN 376	2B
VTSFT6036	VTSFT6036	3/4 - 16	140	30	46	16,0	4	DIN 376	2B
VTSFT6037	VTSFT6037	7/8 - 9	140	34	35	18,0	4	DIN 376	2B
VTSFT6038	VTSFT6038	7/8 - 14	140	34	35	18,0	4	DIN 376	2B
VTSFT6039	VTSFT6039	1 - 8	160	38	41	18,0	4	DIN 376	2B
VTSFT6040	VTSFT6040	1 - 12	160	38	41	18,0	4	DIN 376	2B

• WP49EG oxide



HSS-E



DIN 371

DIN 376




3B

UNJC

UNJF




High-Performance Taps

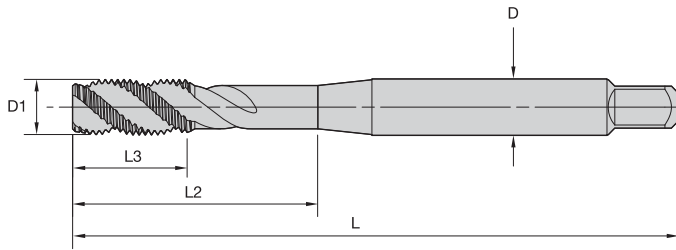

- first choice
- alternate choice

Shank Tolerance	
D mm	tolerance h9
1-3	+0, -0,025
>3-6	+0, -0,030
>6-10	+0, -0,036
>10-18	+0, -0,043
>18-30	+0, -0,052

■ VT-SFT • Form C Semi-Bottoming Chamfer • UNJC/UNJF • Inch DIN 371 and 376



	metric dimensions					number of flutes	dimension standard	class of fit
	D1 size	L	L3	L2	D			
WP49EG								
VTSFT6006	4 - 40	56	8	18	3,5	2	DIN 371	3B
VTSFT6009	6 - 32	56	9	20	4,0	2	DIN 371	3B
VTSFT6012	8 - 32	63	11	21	4,5	3	DIN 371	3B
VTSFT6015	10 - 32	70	12	25	6,0	3	DIN 371	3B
VTSFT6018	1/4 - 28	80	15	30	7,0	3	DIN 371	3B
VTSFT6021	5/16 - 24	90	15	35	8,0	3	DIN 371	3B
VTSFT6024	3/8 - 24	100	19	39	10,0	3	DIN 371	3B
VTSFT6027	7/16 - 20	100	18	41	8,0	3	DIN 376	3B
VTSFT6030	1/2 - 20	110	23	40	9,0	3	DIN 376	3B

High-Performance Taps


VariTap™ Spiral Flute HSS-E Taps • Blind Holes



- WP42EG TiCN
- WU41EG TiN
- WP49EG oxide
- WU40EG bright



High-Performance Taps

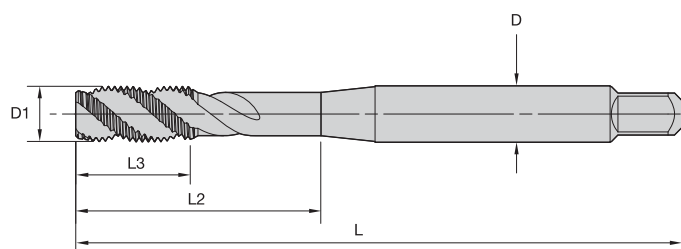

- first choice
- alternate choice

Shank Tolerance	
D mm	tolerance h9
1-3	+0, -0,025
>3-6	+0, -0,030
>6-10	+0, -0,036
>10-18	+0, -0,043
>18-30	+0, -0,052

■ VT-SFT • Form C Semi-Bottoming Chamfer • Metric DIN 371, 374, and 376

				metric dimensions					number of flutes	dimension standard	class of fit
				D1 size	L	L3	L2	D			
WP42EG	WU41EG	WP49EG	WU40EG								
—	—	VTSFT6507	—	M2 X 0,4	45	7	13	2,8	2	DIN 371	6G
VTSFT6506	VTSFT6506	VTSFT6506	VTSFT6506	M2 X 0,4	45	7	13	2,8	2	DIN 371	6H
—	—	VTSFT6508	—	M2,2 X 0,45	45	7	13	2,8	2	DIN 371	6H
—	—	VTSFT6510	—	M2,5 X 0,45	50	7	15	2,8	2	DIN 371	6G
—	VTSFT6509	VTSFT6509	VTSFT6509	M2,5 X 0,45	50	7	15	2,8	2	DIN 371	6H
—	—	VTSFT6545	—	M3 X 0,35	56	8	—	2,2	2	DIN 374	6H
—	—	VTSFT6512	—	M3 X 0,5	56	8	18	3,5	2	DIN 371	6G
VTSFT6511	VTSFT6511	VTSFT6511	VTSFT6511	M3 X 0,5	56	8	18	3,5	2	DIN 371	6H
—	—	VTSFT6525	VTSFT6525	M3 X 0,5	56	8	—	2,2	2	DIN 376	6H
—	VTSFT6513	VTSFT6513	VTSFT6513	M3,5 X 0,6	56	9	20	4,0	2	DIN 371	6H
—	—	VTSFT6515	—	M4 X 0,7	63	11	21	4,5	3	DIN 371	6G
—	—	VTSFT6546	VTSFT6546	M4 X 0,5	63	10	21	2,8	2	DIN 374	6H
VTSFT6514	VTSFT6514	VTSFT6514	VTSFT6514	M4 X 0,7	63	11	21	4,5	3	DIN 371	6H
—	—	VTSFT6526	VTSFT6526	M4 X 0,7	63	10	21	2,8	3	DIN 376	6H
—	—	VTSFT6547	VTSFT6547	M5 X 0,5	70	12	25	3,5	2	DIN 374	6H
—	—	VTSFT6517	—	M5 X 0,8	70	12	25	6,0	3	DIN 371	6G
VTSFT6516	VTSFT6516	VTSFT6516	VTSFT6516	M5 X 0,8	70	12	25	6,0	3	DIN 371	6H
—	—	VTSFT6527	VTSFT6527	M5 X 0,8	70	12	25	3,5	3	DIN 376	6H
—	—	VTSFT6548	—	M6 X 0,5	80	12	30	4,5	2	DIN 374	6H
—	—	VTSFT6549	VTSFT6549	M6 X 0,75	80	12	30	4,5	2	DIN 374	6H
—	—	VTSFT6519	—	M6 X 1	80	12	30	6,0	3	DIN 371	6G
VTSFT6518	VTSFT6518	VTSFT6518	VTSFT6518	M6 X 1	80	12	30	6,0	3	DIN 371	6H
—	—	VTSFT6528	VTSFT6528	M6 X 1	80	12	30	4,5	3	DIN 376	6H
—	—	VTSFT6520	VTSFT6520	M7 X 1	80	12	30	7,0	3	DIN 371	6H
—	—	VTSFT6550	VTSFT6550	M8 X 0,75	80	12	30	6,0	2	DIN 374	6H
VTSFT6551	—	VTSFT6551	VTSFT6551	M8 X 1	90	15	35	6,0	2	DIN 374	6H
—	—	VTSFT6522	—	M8 X 1,25	90	15	35	8,0	3	DIN 371	6G
VTSFT6521	VTSFT6521	VTSFT6521	VTSFT6521	M8 X 1,25	90	15	35	8,0	3	DIN 371	6H
—	—	VTSFT6529	VTSFT6529	M8 X 1,25	90	15	35	6,0	3	DIN 376	6H
—	—	—	VTSFT6552	M10 X 0,75	90	15	35	7,0	2	DIN 374	6H
—	—	VTSFT6553	VTSFT6553	M10 X 1	90	15	35	7,0	2	DIN 374	6H
VTSFT6554	—	VTSFT6554	VTSFT6554	M10 X 1,25	100	18	39	7,0	2	DIN 374	6H

(continued)

(VT-SFT • Form C Semi-Bottoming Chamfer • Metric DIN 371, 374, and 376 continued)



				metric dimensions					number of flutes	dimension standard	class of fit
WP42EG	WU41EG	WP49EG	WU40EG	D1 size	L	L3	L2	D			
—	—	VTSFT6524	—	M10 X 1,5	100	18	39	10,0	3	DIN 371	6G
VTSFT6523	VTSFT6523	VTSFT6523	VTSFT6523	M10 X 1,5	100	18	39	10,0	3	DIN 371	6H
—	—	VTSFT6530	VTSFT6530	M10 X 1,5	100	18	39	7,0	3	DIN 376	6H
—	—	VTSFT6555	VTSFT6555	M12 X 1	100	21	39	9,0	2	DIN 374	6H
—	—	VTSFT6556	VTSFT6556	M12 X 1,25	100	21	39	9,0	2	DIN 374	6H
VTSFT6557	—	VTSFT6557	VTSFT6557	M12 X 1,5	100	21	39	9,0	2	DIN 374	6H
—	—	VTSFT6532	—	M12 X 1,75	110	21	44	9,0	3	DIN 376	6G
VTSFT6531	VTSFT6531	VTSFT6531	VTSFT6531	M12 X 1,75	110	21	44	9,0	3	DIN 376	6H
—	—	—	VTSFT6558	M14 X 1	100	21	47	11,0	2	DIN 374	6H
—	—	—	VTSFT6559	M14 X 1,25	100	21	47	11,0	2	DIN 374	6H
VTSFT6560	—	VTSFT6560	VTSFT6560	M14 X 1,5	100	21	47	11,0	2	DIN 374	6H
—	—	VTSFT6534	—	M14 X 2	110	24	52	11,0	3	DIN 376	6G
VTSFT6533	VTSFT6533	VTSFT6533	VTSFT6533	M14 X 2	110	24	52	11,0	3	DIN 376	6H
—	—	—	VTSFT6561	M16 X 1	100	21	46	12,0	2	DIN 374	6H
—	—	VTSFT6562	VTSFT6562	M16 X 1,5	100	21	46	12,0	2	DIN 374	6H
—	—	VTSFT6536	—	M16 X 2	110	24	51	12,0	3	DIN 376	6G
—	VTSFT6535	VTSFT6535	VTSFT6535	M16 X 2	110	24	51	12,0	3	DIN 376	6H
—	—	—	VTSFT6563	M18 X 1	110	21	50	14,0	2	DIN 374	6H
—	—	VTSFT6564	VTSFT6564	M18 X 1,5	110	21	50	14,0	2	DIN 374	6H
—	—	—	VTSFT6565	M18 X 2	125	30	58	14,0	2	DIN 374	6H
—	VTSFT6537	VTSFT6537	VTSFT6537	M18 X 2,5	125	30	58	14,0	4	DIN 376	6H
—	—	—	VTSFT6566	M20 X 1	125	24	56	16,0	2	DIN 374	6H
—	—	VTSFT6567	VTSFT6567	M20 X 1,5	125	24	56	16,0	2	DIN 374	6H
—	—	—	VTSFT6568	M20 X 2	140	30	64	16,0	2	DIN 374	6H
—	VTSFT6538	VTSFT6538	VTSFT6538	M20 X 2,5	140	30	64	16,0	4	DIN 376	6H
—	—	VTSFT6569	VTSFT6569	M22 X 1,5	125	24	62	18,0	2	DIN 374	6H
—	—	—	VTSFT6570	M22 X 2	140	30	70	18,0	2	DIN 374	6H
—	VTSFT6539	VTSFT6539	VTSFT6539	M22 X 2,5	140	30	70	18,0	4	DIN 376	6H
—	—	VTSFT6571	VTSFT6571	M24 X 1,5	140	28	67	18,0	2	DIN 374	6H
—	—	—	VTSFT6572	M24 X 2	140	28	67	18,0	2	DIN 374	6H
—	VTSFT6540	VTSFT6540	VTSFT6540	M24 X 3	160	36	77	18,0	4	DIN 376	6H
—	VTSFT6541	VTSFT6541	VTSFT6541	M27 X 3	160	36	82	20,0	4	DIN 376	6H
—	—	—	VTSFT6573	M30 X 2	150	28	80	22,0	2	DIN 374	6H
—	VTSFT6542	VTSFT6542	VTSFT6542	M30 X 3,5	180	42	91	22,0	4	DIN 376	6H
—	—	VTSFT6543	VTSFT6543	M33 X 3,5	180	42	100	25,0	4	DIN 376	6H
—	—	VTSFT6544	VTSFT6544	M36 X 4	200	48	110	28,0	5	DIN 376	6H

High-Performance Taps


VariTap™ Spiral Flute HSS-E Taps • Blind Holes



- WP42EG TiCN
- WP49EG oxide



High-Performance Taps


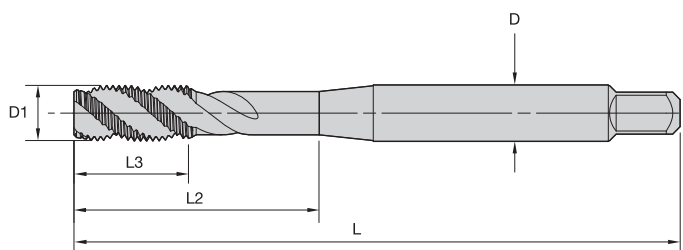


- first choice
- alternate choice

Shank Tolerance


D mm	tolerance h9
1-3	+0, -0,025
>3-6	+0, -0,030
>6-10	+0, -0,036
>10-18	+0, -0,043
>18-30	+0, -0,052

■ VT-SFT • Form E Bottoming Chamfer • Metric DIN 371, 374, and 376



		metric dimensions					number of flutes	dimension standard	class of fit
WP42EG	WP49EG	D1 size	L	L3	L2	D			
VTSFT6574	VTSFT6574	M3 X 0,5	56	8	18	3,5	2	DIN 371	6H
VTSFT6575	VTSFT6575	M4 X 0,7	63	11	21	4,5	3	DIN 371	6H
VTSFT6576	VTSFT6576	M5 X 0,8	70	12	25	6,0	3	DIN 371	6H
VTSFT6577	VTSFT6577	M6 X 1	80	12	30	6,0	3	DIN 371	6H
VTSFT6585	VTSFT6585	M8 X 1	90	15	35	6,0	3	DIN 374	6H
VTSFT6578	VTSFT6578	M8 X 1,25	90	15	35	8,0	3	DIN 371	6H
VTSFT6586	VTSFT6586	M10 X 1,25	100	18	39	7,0	3	DIN 374	6H
VTSFT6579	VTSFT6579	M10 X 1,5	100	18	39	10,0	3	DIN 371	6H
VTSFT6587	VTSFT6587	M12 X 1,5	110	21	44	9,0	3	DIN 374	6H
VTSFT6580	VTSFT6580	M12 X 1,75	110	21	44	9,0	3	DIN 376	6H
VTSFT6588	VTSFT6588	M14 X 1,5	110	24	52	11,0	3	DIN 374	6H
VTSFT6581	VTSFT6581	M14 X 2	110	24	52	11,0	3	DIN 376	6H
—	VTSFT6582	M16 X 2	110	24	51	12,0	3	DIN 376	6H
VTSFT6583	VTSFT6583	M18 X 2,5	125	30	58	14,0	4	DIN 376	6H
VTSFT6584	VTSFT6584	M20 X 2,5	140	30	64	16,0	4	DIN 376	6H



- WU41EG TiN
- WU40EG bright

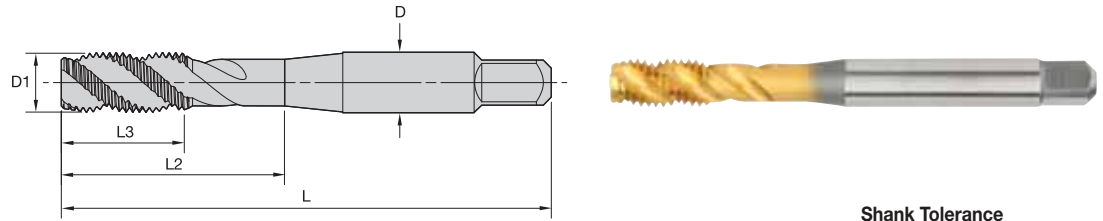

- first choice
- alternate choice

Shank Tolerance	
D mm	tolerance h9
1-3	+0, -0,025
>3-6	+0, -0,030
>6-10	+0, -0,036
>10-18	+0, -0,043
>18-30	+0, -0,052

■ VT-SFT • Form C Semi-Bottoming Chamfer • Metric • JIS



		metric dimensions					number of flutes	dimension standard	tap class
		D1 size	L	L3	L2	D			
WU41EG	WU40EG								
VTSFT7505	VTSFT7505	M3 X 0,5	46	11	19	4,0	2	JIS	ISO 2
VTSFT7506	VTSFT7506	M4 X 0,7	52	13	21	5,0	3	JIS	ISO 2
VTSFT7507	VTSFT7507	M5 X 0,8	60	16	24	5,5	3	JIS	ISO 2
VTSFT7508	VTSFT7508	M6 X 1	62	19	29	6,0	3	JIS	ISO 2
VTSFT7509	VTSFT7509	M8 X 1,25	70	22	37	6,2	3	JIS	ISO 2
VTSFT7510	VTSFT7510	M10 X 1,5	75	24	41	7,0	3	JIS	ISO 2
—	VTSFT7511	M12 X 1,25	82	29	48	8,5	3	JIS	ISO 2
—	VTSFT7512	M12 X 1,75	82	29	48	8,5	3	JIS	ISO 2
—	VTSFT7513	M12 X 1,5	82	29	48	8,5	3	JIS	ISO 2
—	VTSFT7514	M14 X 2	88	30	48	10,5	3	JIS	ISO 2
—	VTSFT7515	M14 X 1,5	88	30	48	10,5	3	JIS	ISO 2
—	VTSFT7516	M16 X 2	95	32	52	12,5	3	JIS	ISO 2
—	VTSFT7517	M16 X 1,5	95	32	52	12,5	3	JIS	ISO 2
—	VTSFT7518	M18 X 2,5	100	37	55	14,0	4	JIS	ISO 2
—	VTSFT7519	M20 X 2,5	105	37	60	15,0	4	JIS	ISO 2

■ VariTap • HSS-E • Metric

VariTap HSS-E											
		 Through Holes					 Blind Holes				
Material Group	VDI 3323			Range — m/min					Range — m/min		
		Tap Style	Grade*	min	Starting Value	max	Tap Style	Grade*	min	Starting Value	max
P	1	VT-SPO	WP42EG, WU41EG	25	34	42	VT-SFT	WP42EG, WU41EG	17	24	35
		VT-SPO	WP49EG, WU40EG	14	18	23	VT-SFT	WP49EG, WU40EG	9	13	18
	2, 3, 4, 5	VT-SPO	WP42EG, WU41EG	18	24	30	VT-SFT	WP42EG, WU41EG	11	15	22
		VT-SPO	WP49EG, WU40EG	10	14	17	VT-SFT	WP49EG, WU40EG	6	9	13
	6, 7, 8, 10	VT-SPO	WP42EG, WU41EG	11	15	19	VT-SFT	WP42EG, WU41EG	9	12	17
		VT-SPO	WP49EG, WU40EG	7	9	11	VT-SFT	WP49EG, WU40EG	5	7	10
M		VT-SPO	WP42EG, WU41EG	11	15	19	VT-SFT	WP42EG, WU41EG	6	9	13
		VT-SPO	WP49EG, WU40EG	6	8	10	VT-SFT	WP49EG, WU40EG	4	5	8
	14.1, 14.3	VT-SPO	WP42EG, WU41EG	16	21	27	VT-SFT	WP42EG, WU41EG	11	15	22
		VT-SPO	WP49EG, WU40EG	9	12	15	VT-SFT	WP49EG, WU40EG	6	9	13
	14.2	VT-SPO	WP42EG, WU41EG	11	15	19	VT-SFT	WP42EG, WU41EG	9	12	17
		VT-SPO	WP49EG, WU40EG	7	9	11	VT-SFT	WP49EG, WU40EG	4	6	9
K	15, 16	—	—	—	—	—	—	—	—	—	—
		—	—	—	—	—	—	—	—	—	—
	17, 18, 19	VT-SPO	WP42EG, WU41EG	16	21	27	VT-SFT	WP42EG, WU41EG	11	15	22
N		VT-SPO	WP49EG, WU40EG	9	12	15	VT-SFT	WP49EG, WU40EG	6	9	12
	21, 22	VT-SPO	WP42EG, WU41EG	37	49	61	VT-SFT	WP42EG, WU41EG	26	37	52
		VT-SPO	WU40EG	21	27	34	VT-SFT	WU40EG	14	20	28
	23, 24	VT-SPO	WP42EG, WU41EG	30	40	50	VT-SFT	WP42EG, WU41EG	19	27	39
		VT-SPO	WU40EG	16	21	27	VT-SFT	WU40EG	11	15	22
	26, 27, 28	VT-SPO	WP42EG, WU41EG	37	49	61	VT-SFT	WP42EG, WU41EG	23	34	48
		VT-SPO	WU40EG	21	27	34	VT-SFT	WU40EG	13	18	26

* Grades: WP42EG = TiCN
 WU41EG = TiN
 WP49EG = oxide
 WU40EG = bright

WIN WITH WIDIA™



Victory™ GT HP HSS-E-PM Wind Taps

Boost productivity on large-sized components.

- Made with highly alloyed powdered metal HSS-E substrate that combines wear and heat resistance with toughness.
- GP6520™ Grade provides long tap life at high tapping speeds.
- Precision h6 shank results in exceptional thread quality and tool life due to very low runout.
- GT20 for through holes.
- GT30 and GT31 for blind holes in vertical tapping.
- GT50 and GT51 for blind holes in horizontal tapping.
- All GT™ Series Wind Taps are available according to DIN 376 and extra-length standards.



To learn more about our innovations, contact your local Authorised Distributor or visit www.widia.com.

WIDIA 


High-Performance HSS-E-PM Victory™ Taps • **WIDIA-GTD™**

Our powdered metal taps deliver highly reliable threads and superior performance in blind and through hole applications. The HP HSS-E-PM is the optimum choice for customers looking for high productivity and long tool life in material-specific applications.

Line Expansion

WIDIA-GTD

- Enhanced design for reliable thread in different materials.
- More resistant to edge chipping than carbide.
- Better performance at high speeds.

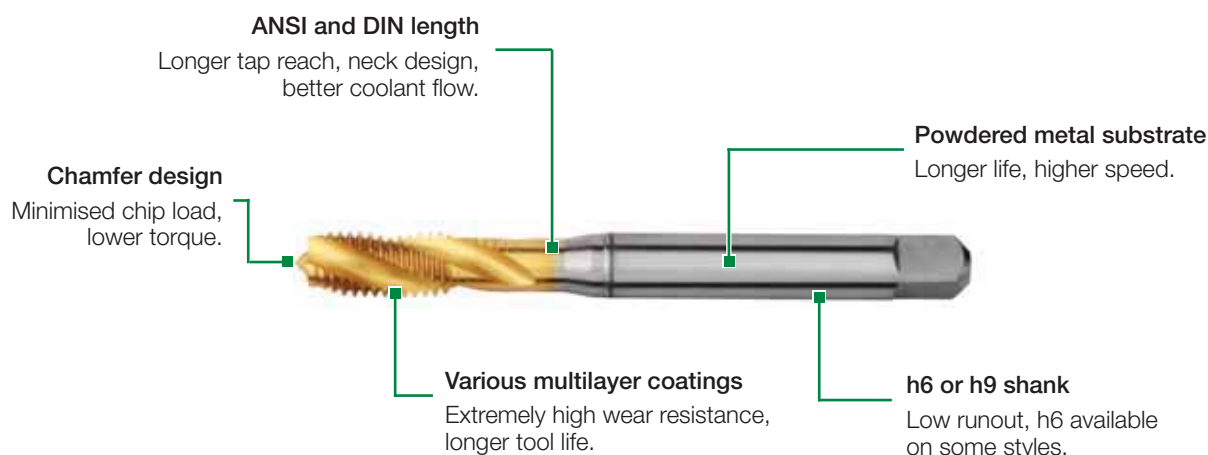

Powdered Metal Taps

- Manufactured from powdered metal high-speed steel coated for thread cutting and thread forming in various applications.
- Offer performance advantages over other regular high-speed steel taps.
- Unmatched by competitive products.

Tap Functions

- High wear resistance and hot hardness without sacrificing edge strength.
- PVD coatings offer outstanding thermal stability, hot hardness, oxidation resistance, and low coefficient of friction.
- Left-hand spiral fluted taps push chips ahead in through holes.
- Optimised spiral flute designs enables deep blind holes to be threaded.
- Straight flute taps store chips in hole or are flushed out with internal coolant.
- Taps can be used in collet and hydraulic holders.
- Low runout of thread and chamfer.

Benefits

- Long tap life at up to 50% higher tapping speed.
- Excellent chip control.
- Reliable performance.
- Exceptional thread quality.



High-Performance Taps


Victory™ Spiral Point Plug HSS-E-PM Taps • Through Holes



• WP31MG TiN for steel 32–44 HRC



High-Performance Taps

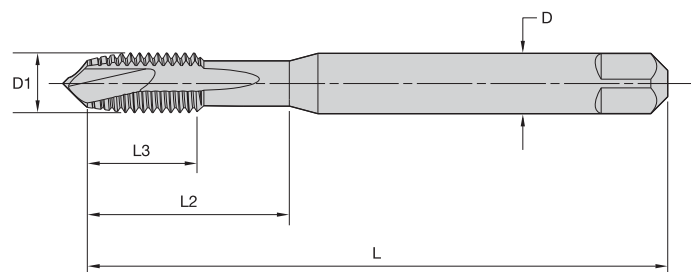


VICTORY

- first choice
- alternate choice

■ GT00 • Form B Plug Chamfer • Metric DIN 371, 374, and 376

Shank Tolerance	
D mm	tolerance h9
1–3	+0, -0,025
>3–6	+0, -0,030
>6–10	+0, -0,036
>10–18	+0, -0,043
>18–30	+0, -0,052




metric dimensions

WP31MG	D1 size	L	L3	L2	D	number of flutes	dimension standard	class of fit
GT005001	M3 X 0,5	56	11	18	3,5	2	DIN 371	6HX
GT005002	M4 X 0,7	63	13	21	4,5	2	DIN 371	6HX
GT005003	M5 X 0,8	70	15	25	6,0	2	DIN 371	6HX
GT005004	M6 X 1	80	17	30	6,0	3	DIN 371	6HX
GT005012	M8 X 1	90	17	—	6,0	3	DIN 374	6HX
GT005005	M8 X 1,25	90	20	35	8,0	3	DIN 371	6HX
GT005013	M10 X 1	90	18	—	7,0	3	DIN 374	6HX
GT005014	M10 X 1,25	100	22	—	7,0	3	DIN 374	6HX
GT005006	M10 X 1,5	100	22	39	10,0	3	DIN 371	6HX
GT005015	M12 X 1,25	100	22	—	9,0	3	DIN 374	6HX
GT005016	M12 X 1,5	100	22	—	9,0	3	DIN 374	6HX
GT005007	M12 X 1,75	110	24	—	9,0	3	DIN 376	6HX
GT005017	M14 X 1,5	100	22	—	11,0	3	DIN 374	6HX
GT005008	M14 X 2	110	26	—	11,0	3	DIN 376	6HX
GT005018	M16 X 1,5	100	22	—	12,0	4	DIN 374	6HX
GT005009	M16 X 2	110	27	—	12,0	4	DIN 376	6HX
GT005010	M18 X 2	125	30	—	14,0	4	DIN 376	6HX
GT005011	M20 X 2,5	140	32	—	16,0	4	DIN 376	6HX

• WP31MG TiN for steel 32–44 HRC



High-Performance Taps

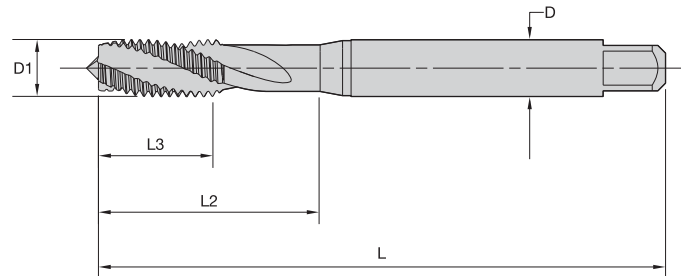


VICTORY

- first choice
- alternate choice

Shank Tolerance

D mm	tolerance h9
1–3	+0, -0,025
>3–6	+0, -0,030
>6–10	+0, -0,036
>10–18	+0, -0,043
>18–30	+0, -0,052

■ GT02 • Form C Semi-Bottoming Chamfer • Metric DIN 371, 374, and 376



metric dimensions

WP31MG	D1 size	L	L3	L2	D	number of flutes	dimension standard	class of fit
GT025001	M3 X 0,5	56	11	18	3,5	3	DIN 371	6H
GT025002	M4 X 0,7	63	13	21	4,5	3	DIN 371	6H
GT025003	M5 X 0,8	70	15	25	6,0	3	DIN 371	6H
GT025004	M6 X 1	80	17	30	6,0	3	DIN 371	6H
GT025012	M8 X 1	90	17	—	6,0	3	DIN 374	6H
GT025005	M8 X 1,25	90	20	35	8,0	3	DIN 371	6H
GT025013	M10 X 1	90	18	—	7,0	3	DIN 374	6H
GT025014	M10 X 1,25	100	22	—	7,0	3	DIN 374	6H
GT025006	M10 X 1,5	100	22	39	10,0	3	DIN 371	6H
GT025015	M12 X 1,25	100	22	—	9,0	3	DIN 374	6H
GT025016	M12 X 1,5	100	22	—	9,0	3	DIN 374	6H
GT025007	M12 X 1,75	110	24	44	12,0	3	DIN 376	6H
GT025017	M14 X 1,5	100	22	—	11,0	3	DIN 374	6H
GT025008	M14 X 2	110	26	52	11,0	3	DIN 376	6H
GT025018	M16 X 1,5	100	22	—	12,0	3	DIN 374	6H
GT025009	M16 X 2	110	27	—	12,0	3	DIN 376	6H
GT025010	M18 X 2	125	30	—	14,0	4	DIN 376	6H
GT025011	M20 X 2,5	140	32	—	16,0	4	DIN 376	6H

High-Performance Taps


Victory™ Spiral Flute HSS-E-PM Taps • Blind Holes 3 x D



- WH36MG TiAlN/MoS₂ for steel
32–44 HRC (3 x D)




High-Performance Taps

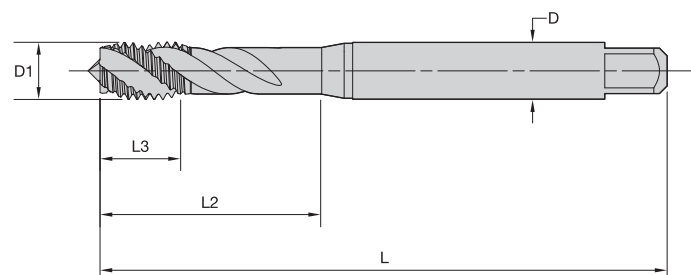

- first choice
- alternate choice


Shank Tolerance	
D mm	tolerance h9
1–3	+0, -0,025
>3–6	+0, -0,030
>6–10	+0, -0,036
>10–18	+0, -0,043
>18–30	+0, -0,052

■ GT04 • Form C Semi-Bottoming Chamfer • Metric DIN 371, 374, and 376



metric dimensions								
WH36MG	D1 size	L	L3	L2	D	number of flutes	dimension standard	class of fit
GT045001	M3 X 0,5	56	6	18	3,5	3	DIN 371	6H
GT045002	M4 X 0,7	63	7	21	4,5	3	DIN 371	6H
GT045003	M5 X 0,8	70	8	25	6,0	3	DIN 371	6H
GT045004	M6 X 1	80	10	30	6,0	3	DIN 371	6H
GT045012	M8 X 1	90	10	—	6,0	3	DIN 374	6H
GT045005	M8 X 1,25	90	14	35	8,0	3	DIN 371	6H
GT045013	M10 X 1	90	10	—	7,0	3	DIN 374	6H
GT045014	M10 X 1,25	100	16	—	7,0	3	DIN 374	6H
GT045006	M10 X 1,5	100	16	39	10,0	3	DIN 371	6H
GT045015	M12 X 1,25	100	15	—	9,0	4	DIN 374	6H
GT045016	M12 X 1,5	100	15	—	9,0	4	DIN 374	6H
GT045007	M12 X 1,75	110	18	—	9,0	4	DIN 376	6H
GT045017	M14 X 1,5	100	15	—	11,0	4	DIN 374	6H
GT045008	M14 X 2	110	20	—	11,0	4	DIN 376	6H
GT045018	M16 X 1,5	100	15	—	12,0	4	DIN 374	6H
GT045009	M16 X 2	110	22	—	12,0	4	DIN 376	6H
GT045010	M18 X 2	125	25	—	14,0	4	DIN 376	6H
GT045011	M20 X 2,5	140	25	—	16,0	4	DIN 376	6H

- WS32MG TiCN for steel
44–55 HRC

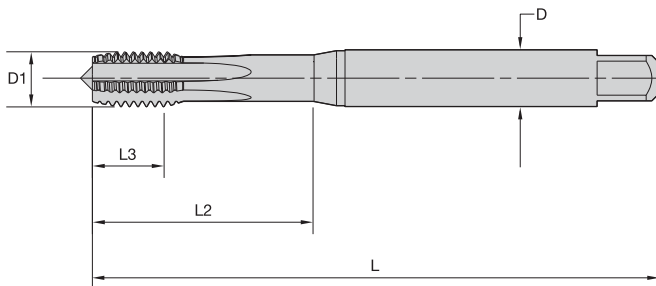


VICTORY

- first choice
- alternate choice

Shank Tolerance	
D mm	tolerance h9
1–3	+0, -0,025
>3–6	+0, -0,030
>6–10	+0, -0,036
>10–18	+0, -0,043
>18–30	+0, -0,052

■ GT06 • Form C Semi-Bottoming Chamfer • Metric DIN 371, 374, and 376




WS32MG	metric dimensions					number of flutes	dimension standard	class of fit
	D1 size	L	L3	L2	D			
GT065003	M6 X 1	80	10	30	6,0	4	DIN 371	6HX
GT065006	M8 X 1	90	10	35	8,0	5	DIN 374	6HX
GT065001	M8 X 1,25	90	14	35	8,0	5	DIN 371	6HX
GT065008	M12 X 1,5	100	15	—	9,0	5	DIN 374	6HX
GT065004	M12 X 1,75	110	18	—	9,0	5	DIN 376	6HX
GT065007	M10 X 1	90	10	35	10,0	5	DIN 374	6HX
GT065002	M10 X 1,5	100	16	39	10,0	5	DIN 371	6HX
GT065009	M14 X 1,5	100	15	—	11,0	6	DIN 374	6HX
GT065010	M16 X 1,5	100	15	—	12,0	6	DIN 374	6HX
GT065005	M16 X 2	110	22	—	12,0	6	DIN 376	6HX

High-Performance Taps

Victory™ Left-Hand Spiral Flute HSS-E-PM Taps • Through Holes



- WS32MG TiCN for nickel and nickel alloys

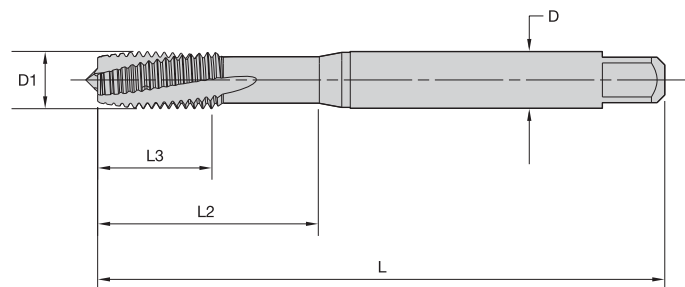


VICTORY

- first choice
- alternate choice

Shank Tolerance


D mm	tolerance h9
1-3	+0, -0,025
>3-6	+0, -0,030
>6-10	+0, -0,036
>10-18	+0, -0,043
>18-30	+0, -0,052

■ GT10 • Form D Plug Chamfer • Metric DIN 371 and 376



	metric dimensions							
WS32MG	D1 size	L	L3	L2	D	number of flutes	dimension standard	class of fit
GT105001	M3 X 0,5	56	11	18	3,5	2	DIN 371	6HX
GT105002	M4 X 0,7	63	13	21	4,5	3	DIN 371	6HX
GT105003	M5 X 0,8	70	15	25	6,0	3	DIN 371	6HX
GT105004	M6 X 1	80	17	30	6,0	3	DIN 371	6HX
GT105005	M8 X 1,25	90	20	35	8,0	3	DIN 371	6HX
GT105006	M10 X 1,5	100	22	39	10,0	3	DIN 371	6HX
GT105007	M12 X 1,75	110	24	—	9,0	3	DIN 376	6HX
GT105008	M14 X 2	110	26	—	11,0	3	DIN 376	6HX
GT105009	M16 X 2	110	27	—	12,0	3	DIN 376	6HX
GT105010	M20 X 2,5	140	32	—	16,0	3	DIN 376	6HX

- WS32MG TiCN for nickel and nickel alloys

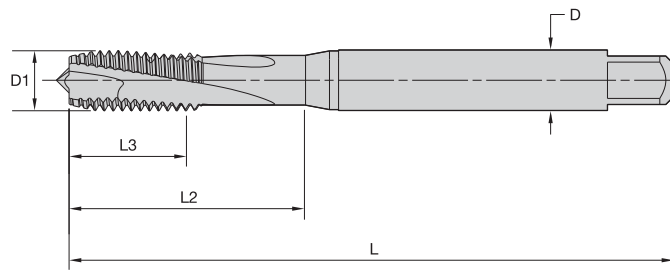

VICTORY

- first choice
- alternate choice

Shank Tolerance

D mm	tolerance h9
1-3	+0, -0,025
>3-6	+0, -0,030
>6-10	+0, -0,036
>10-18	+0, -0,043
>18-30	+0, -0,052

■ GT12 • Form C Semi-Bottoming Chamfer • Metric DIN 371 and 376



metric dimensions

WS32MG	D1 size	L	L3	L2	D	number of flutes	dimension standard	class of fit
GT125001	M3 X 0,5	56	11	18	3,5	2	DIN 371	6HX
GT125002	M4 X 0,7	63	13	21	4,5	3	DIN 371	6HX
GT125003	M5 X 0,8	70	15	25	6,0	3	DIN 371	6HX
GT125004	M6 X 1	80	17	30	6,0	3	DIN 371	6HX
GT125005	M8 X 1,25	90	20	35	8,0	3	DIN 371	6HX
GT125006	M10 X 1,5	100	22	39	10,0	3	DIN 371	6HX
GT125007	M12 X 1,75	110	24	—	9,0	3	DIN 376	6HX
GT125008	M14 X 2	110	26	—	11,0	3	DIN 376	6HX
GT125009	M16 X 2	110	27	—	12,0	3	DIN 376	6HX
GT125010	M20 X 2,5	140	32	—	16,0	3	DIN 376	6HX

High-Performance Taps


Victory™ Spiral Point Plug HSS-E-PM Taps • Through Holes



- WN35MG TiN/DLC for titanium and titanium alloys



High-Performance Taps

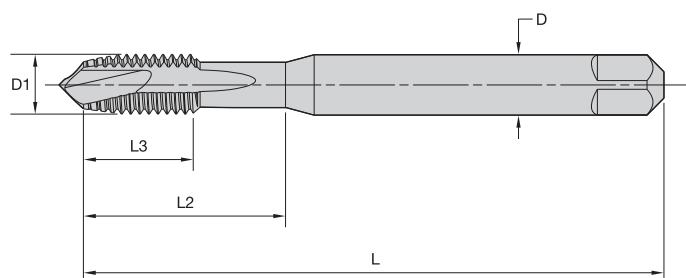


VICTORY

- first choice
- alternate choice

Shank Tolerance

D mm	tolerance h9
1-3	+0, -0,025
>3-6	+0, -0,030
>6-10	+0, -0,036
>10-18	+0, -0,043
>18-30	+0, -0,052


■ GT14 • Form B Plug Chamfer • Metric DIN 371 and 376



metric dimensions

WN35MG	D1 size	L	L3	L2	D	number of flutes	dimension standard	class of fit
GT145001	M3 X 0,5	56	11	18	3,5	3	DIN 371	6HX
GT145002	M4 X 0,7	63	13	21	4,5	3	DIN 371	6HX
GT145003	M5 X 0,8	70	15	25	6,0	3	DIN 371	6HX
GT145004	M6 X 1	80	17	30	6,0	3	DIN 371	6HX
GT145005	M8 X 1,25	90	20	35	8,0	3	DIN 371	6HX
GT145006	M10 X 1,5	100	22	39	10,0	3	DIN 371	6HX
GT145007	M12 X 1,75	110	24	—	9,0	3	DIN 376	6HX

- WN35MG TiN/DLC for titanium and titanium alloys

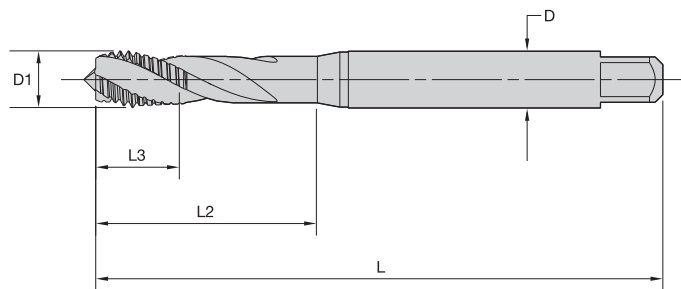


VICTORY

- first choice
- alternate choice

Shank Tolerance	
D mm	tolerance h9
1-3	+0, -0,025
>3-6	+0, -0,030
>6-10	+0, -0,036
>10-18	+0, -0,043
>18-30	+0, -0,052

■ GT16 • Form C Semi-Bottoming Chamfer • Metric DIN 371



	metric dimensions					number of flutes	class of fit
	D1 size	L	L3	L2	D		
WN35MG							
GT165001	M3 X 0,5	56	6	18	3,5	3	6HX
GT165002	M4 X 0,7	63	7	21	4,5	3	6HX
GT165003	M5 X 0,8	70	8	25	6,0	3	6HX
GT165004	M6 X 1	80	10	30	6,0	3	6HX
GT165005	M8 X 1,25	90	14	35	8,0	3	6HX
GT165006	M10 X 1,5	100	16	39	10,0	3	6HX
GT165007	M12 X 1,75	110	18	44	12,0	3	6HX

High-Performance Taps


Victory™ Left-Hand Spiral Flute HSS-E-PM Taps • Through Holes



- GM6515 TiN + CrC/C for stainless steel
- GP6520 TiCN for steel



High-Performance Taps

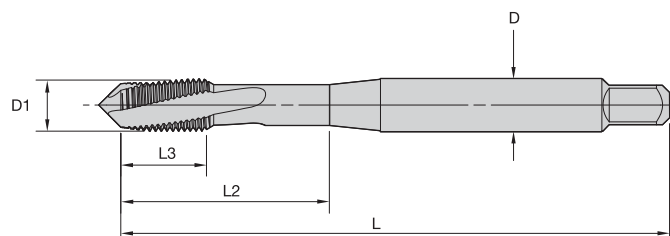



VICTORY

- first choice
- alternate choice

Shank Tolerance

D mm	tolerance h6
>3-6	+0, -0,008
>6-10	+0, -0,009
>10-18	+0, -0,011
>18-30	+0, -0,013
>30-50	+0, -0,016


■ GT20 • Form D Plug Chamfer • Metric DIN 371, 374, and 376



metric dimensions

		D1 size	L	L3	L2	D	number of flutes	dimension standard	class of fit
GP6520	GM6515								
GT205094	GT205077	M3 X 0,5	56	8	18	3,5	2	DIN 371	6HX
GT205095	GT205078	M4 X 0,7	63	10	21	4,5	2	DIN 371	6HX
GT205096	GT205079	M5 X 0,8	70	10	25	6,0	2	DIN 371	6HX
GT205097	GT205080	M6 X 1	80	10	30	6,0	3	DIN 371	6HX
GT205104	GT205087	M8 X 1	90	13	35	6,0	3	DIN 374	6HX
GT205098	GT205081	M8 X 1,25	90	13	35	8,0	3	DIN 371	6HX
GT205105	GT205088	M10 X 1	90	10	35	7,0	3	DIN 374	6HX
GT205106	GT205089	M10 X 1,25	100	15	39	7,0	3	DIN 374	6HX
GT205099	GT205082	M10 X 1,5	100	15	39	10,0	3	DIN 371	6HX
GT205107	GT205090	M12 X 1,5	100	15	39	9,0	3	DIN 374	6HX
GT205100	GT205083	M12 X 1,75	110	18	44	9,0	3	DIN 376	6HX
GT205108	GT205091	M14 X 1,5	100	15	47	11,0	4	DIN 374	6HX
GT205101	GT205084	M14 X 2	110	20	52	11,0	4	DIN 376	6HX
GT205109	GT205092	M16 X 1,5	100	15	46	12,0	4	DIN 374	6HX
GT205102	GT205085	M16 X 2	110	20	51	12,0	4	DIN 376	6HX
GT205110	GT205093	M18 X 1,5	110	15	50	14,0	4	DIN 374	6HX
GT205103	GT205086	M20 X 2,5	140	25	64	16,0	4	DIN 376	6HX
GT205111	—	M24 X 3	160	30	77	18,0	5	DIN 376	6HX
GT205113	—	M30 X 3,5	180	35	91	22,0	5	DIN 376	6HX
GT205114	—	M33 X 3,5	180	35	100	25,0	5	DIN 376	6HX
GT205116	—	M36 X 4	200	40	110	28,0	6	DIN 376	6HX
GT205118	—	M42 X 4,5	200	45	120	32,0	6	DIN 376	6HX



- GM6515 TiN+CrC/C for stainless steel
- GP6520 TiCN for steel

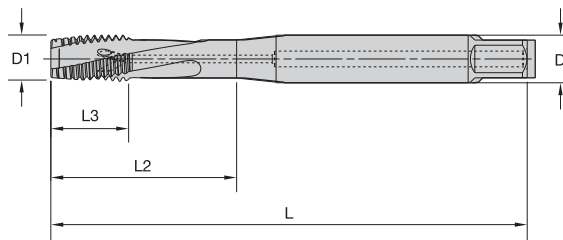
VICTORY

- first choice
- alternate choice

Shank Tolerance

D mm	tolerance h6
>3-6	+0, -0,008
>6-10	+0, -0,009
>10-18	+0, -0,011
>18-30	+0, -0,013
>30-50	+0, -0,016

GT21 • Form D Plug Chamfer • Through Coolant • Metric DIN 371 and 376


metric dimensions

		D1 size	L	L3	L2	D	number of flutes	dimension standard	class of fit
GP6520	GM6515								
GT215007	GT215001	M5 X 0,8	70	10	25	6,0	2	DIN 371	6HX
GT215008	GT215002	M6 X 1	80	10	30	6,0	3	DIN 371	6HX
GT215009	GT215003	M8 X 1,25	90	13	35	8,0	3	DIN 371	6HX
GT215010	GT215004	M10 X 1,5	100	15	39	10,0	3	DIN 371	6HX
GT215011	GT215005	M12 X 1,75	110	18	44	9,0	3	DIN 376	6HX
GT215012	GT215006	M14 X 2	110	20	52	11,0	4	DIN 376	6HX

High-Performance Taps


Victory™ Forming Tap HSS-E-PM • Blind and Through Holes



- WP31MG TiN for steel
- WN38MG DLC for aluminium



High-Performance Taps

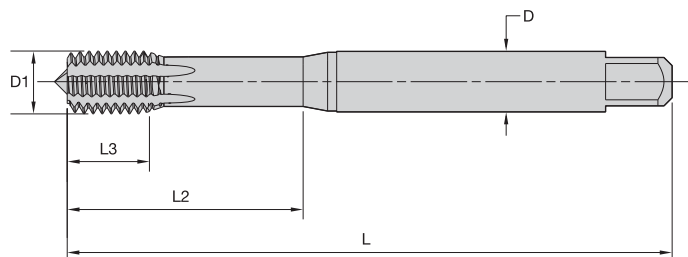



VICTORY

- first choice
- alternate choice

Shank Tolerance

D mm	tolerance h9
1-3	+0, -0,025
>3-6	+0, -0,030
>6-10	+0, -0,036
>10-18	+0, -0,043
>18-30	+0, -0,052


GT22 • Form C Semi-Bottoming Entry Taper • Metric DIN 2174



metric dimensions

WP31MG	WN38MG	D1 size	L	L3	L2	D	number of lube grooves	dimension standard	class of fit
GT225016	GT225001	M3 X 0,5	56	6	18	3,5	4	DIN 2174	6HX
GT225017	GT225002	M4 X 0,7	63	7	21	4,5	4	DIN 2174	6HX
GT225018	GT225003	M5 X 0,8	70	8	25	6,0	4	DIN 2174	6HX
GT225019	GT225004	M6 X 1	80	10	30	6,0	5	DIN 2174	6HX
GT225024	GT225009	M8 X 1	90	10	35	8,0	5	DIN 2174	6HX
GT225020	GT225005	M8 X 1,25	90	14	35	8,0	5	DIN 2174	6HX
GT225025	GT225010	M10 X 1	90	10	35	10,0	5	DIN 2174	6HX
GT225026	GT225011	M10 X 1,25	100	16	39	10,0	5	DIN 2174	6HX
GT225021	GT225006	M10 X 1,5	100	16	39	10,0	5	DIN 2174	6HX
GT225027	GT225012	M12 X 1,25	100	15	—	9,0	6	DIN 2174	6HX
GT225028	GT225013	M12 X 1,5	100	15	—	9,0	6	DIN 2174	6HX
GT225022	GT225007	M12 X 1,75	110	18	—	9,0	6	DIN 2174	6HX
GT225029	GT225014	M14 X 1,5	100	15	—	11,0	6	DIN 2174	6HX
GT225030	GT225015	M16 X 1,5	100	15	—	12,0	6	DIN 2174	6HX
GT225023	GT225008	M16 X 2	110	22	—	12,0	6	DIN 2174	6HX

- WP31MG TiN for steel
- WN38MG DLC for aluminium


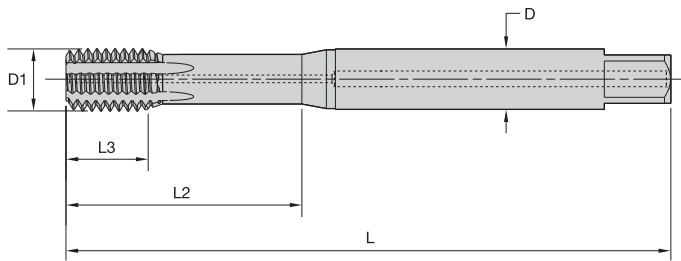


Shank Tolerance

D mm	tolerance h9
1-3	+0, -0,025
>3-6	+0, -0,030
>6-10	+0, -0,036
>10-18	+0, -0,043
>18-30	+0, -0,052

- first choice
- alternate choice

GT23 • Form C Semi-Bottoming Entry Taper • Through Coolant • Metric DIN 2174



metric dimensions

		D1 size	L	L3	L2	D	number of lube grooves	dimension standard	class of fit
WP31MG	WN38MG								
GT235012	GT235001	M5 X 0,8	70	8	25	6,0	4	DIN 2174	6HX
GT235013	GT235002	M6 X 1	80	10	30	6,0	5	DIN 2174	6HX
GT235018	GT235007	M8 X 1	90	10	35	8,0	5	DIN 2174	6HX
GT235014	GT235003	M8 X 1,25	90	14	35	8,0	5	DIN 2174	6HX
GT235019	GT235008	M10 X 1	90	10	35	10,0	5	DIN 2174	6HX
GT235015	GT235004	M10 X 1,5	100	16	39	10,0	5	DIN 2174	6HX
GT235020	GT235009	M12 X 1,5	100	15	—	9,0	6	DIN 2174	6HX
GT235016	GT235005	M12 X 1,75	110	18	—	9,0	6	DIN 2174	6HX
GT235021	GT235010	M14 X 1,5	100	15	—	11,0	6	DIN 2174	6HX
GT235022	GT235011	M16 X 1,5	100	15	—	12,0	6	DIN 2174	6HX
GT235017	GT235006	M16 X 2	110	22	—	12,0	6	DIN 2174	6HX


High-Performance Taps

Victory™ Spiral Flute HSS-E-PM Taps • Blind Holes



High-Performance Taps

- GM6515 TiN + CrC/C for stainless steel
- GP6520 TiCN for steel
- GP6505 oxide for steel



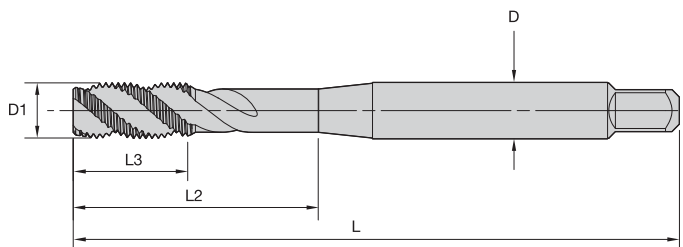


Shank Tolerance

D mm	tolerance h6
>3-6	+0, -0,008
>6-10	+0, -0,009
>10-18	+0, -0,011
>18-30	+0, -0,013
>30-50	+0, -0,016


- first choice
- alternate choice

GT30 • Form C Semi-Bottoming Chamfer • Metric DIN 371, 374, and 376



			metric dimensions					number of flutes	dimension standard	class of fit
			D1 size	L	L3	L2	D			
GP6520	GP6505	GM6515								
GT305097	GT305116	GT305148	M3 X 0,5	56	8	18	3,5	3	DIN 371	6HX
GT305098	GT305117	GT305079	M4 X 0,7	63	10	21	4,5	3	DIN 371	6HX
GT305099	GT305118	GT305080	M5 X 0,8	70	10	25	6,0	3	DIN 371	6HX
GT305100	GT305119	GT305081	M6 X 1	80	10	30	6,0	3	DIN 371	6HX
GT305109	—	GT305090	M8 X 1	90	13	35	6,0	3	DIN 374	6HX
GT305101	GT305120	GT305082	M8 X 1,25	90	13	35	8,0	3	DIN 371	6HX
GT305110	—	GT305091	M10 X 1	90	10	35	7,0	3	DIN 374	6HX
GT305111	—	GT305092	M10 X 1,25	100	15	39	7,0	3	DIN 374	6HX
GT305102	GT305121	GT305083	M10 X 1,5	100	15	39	10,0	3	DIN 371	6HX
GT305112	—	GT305093	M12 X 1,5	100	15	39	9,0	4	DIN 374	6HX
GT305103	GT305122	GT305084	M12 X 1,75	110	18	44	9,0	4	DIN 376	6HX
GT305113	—	GT305094	M14 X 1,5	100	15	47	11,0	4	DIN 374	6HX
GT305104	GT305123	GT305085	M14 X 2	110	20	52	11,0	4	DIN 376	6HX
GT305114	—	GT305095	M16 X 1,5	100	15	46	12,0	4	DIN 374	6HX
GT305105	GT305124	GT305086	M16 X 2	110	20	51	12,0	4	DIN 376	6HX
GT305115	—	GT305096	M18 X 1,5	110	15	50	14,0	4	DIN 374	6HX
GT305106	—	GT305087	M18 X 2,5	125	25	58	14,0	4	DIN 376	6HX
GT305107	—	GT305088	M22 X 2,5	140	25	70	18,0	4	DIN 376	6HX
GT305108	—	GT305089	M24 X 3	160	30	77	18,0	4	DIN 376	6HX
GT305161	—	—	M24 X 3	160	30	77	18,0	5	DIN 376	6HX
GT305163	—	—	M30 X 3,5	180	35	91	22,0	5	DIN 376	6HX
GT305164	—	—	M33 X 3,5	180	35	100	25,0	5	DIN 376	6HX
GT305166	—	—	M36 X 4	200	40	110	28,0	5	DIN 376	6HX
GT305168	—	—	M42 X 4,5	200	45	120	32,0	5	DIN 376	6HX



- GM6515 TiN + CrC/C for stainless steel
- GP6520 TiCN for steel

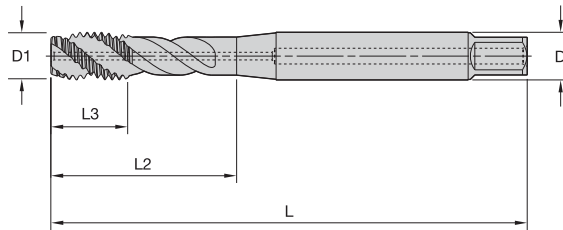
VICTORY

- first choice
- alternate choice

Shank Tolerance

D mm	tolerance h6
>3-6	+0, -0,008
>6-10	+0, -0,009
>10-18	+0, -0,011
>18-30	+0, -0,013
>30-50	+0, -0,016

New Sizes Available
GT31 • Form C Semi-Bottoming Chamfer • Through Coolant • Metric DIN 371 and 376


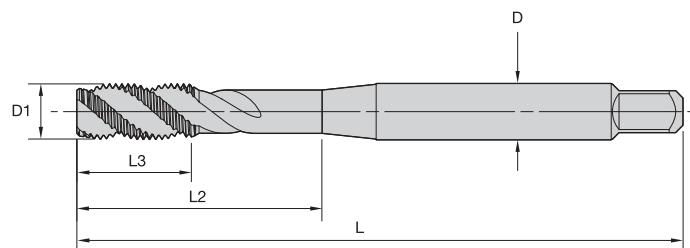
		metric dimensions						number of flutes	dimension standard	class of fit
		D1 size	L	L3	L2	D				
GP6520	GM6515									
GT315007	GT315001	M5 X 0,8	70	10	25	6,0	3	DIN 371	6HX	
GT315008	GT315002	M6 X 1	80	10	30	6,0	3	DIN 371	6HX	
GT315009	GT315003	M8 X 1,25	90	13	35	8,0	3	DIN 371	6HX	
GT315010	GT315004	M10 X 1,5	100	15	39	10,0	3	DIN 371	6HX	
GT315011	GT315005	M12 X 1,75	110	18	44	9,0	4	DIN 376	6HX	
GT315012	GT315006	M14 X 2	110	20	52	11,0	4	DIN 376	6HX	
GT315033	—	M16 X 2	110	20	51	12,0	4	DIN 376	6HX	
GT315034	—	M18 X 2,5	125	25	58	14,0	4	DIN 376	6HX	
GT315035	—	M20 X 2,5	140	25	64	16,0	4	DIN 376	6HX	
GT315025	—	M24 X 3	160	30	77	18,0	5	DIN 376	6HX	
GT315027	—	M30 X 3,5	180	35	91	22,0	5	DIN 376	6HX	
GT315028	—	M33 X 3,5	180	35	100	25,0	5	DIN 376	6HX	
GT315030	—	M36 X 4	200	40	110	28,0	5	DIN 376	6HX	
GT315032	—	M42 X 4,5	200	45	120	32,0	5	DIN 376	6HX	

High-Performance Taps

Victory™ Spiral Flute HSS-E-PM Taps • Threading Close to the Bottom in Blind Holes



- GP6520 TiCN for steel




VICTORY

Shank Tolerance

D mm	tolerance h6
>3-6	+0, -0,008
>6-10	+0, -0,009
>10-18	+0, -0,011
>18-30	+0, -0,013
>30-50	+0, -0,016

- first choice
- alternate choice

GT32 • Form E Bottoming Chamfer • Metric DIN 371, 374, and 376




GP6520	D1 size	metric dimensions				number of flutes	dimension standard	class of fit
		L	L3	L2	D			
GT325001	M5 X 0,8	70	10	25	6,0	3	DIN 371	6HX
GT325002	M6 X 1	80	10	30	6,0	3	DIN 371	6HX
GT325003	M8 X 1,25	90	13	35	8,0	3	DIN 371	6HX
GT325004	M10 X 1,5	100	15	39	10,0	3	DIN 371	6HX
GT325007	M12 X 1,5	100	15	39	9,0	4	DIN 374	6HX
GT325005	M12 X 1,75	110	18	44	9,0	4	DIN 376	6HX
GT325008	M14 X 1,5	100	15	47	11,0	4	DIN 374	6HX
GT325006	M14 X 2	110	20	52	11,0	4	DIN 376	6HX
GT325009	M16 X 1,5	100	15	46	12,0	4	DIN 374	6HX

- GP6520 TiCN for steel



High-Performance Taps

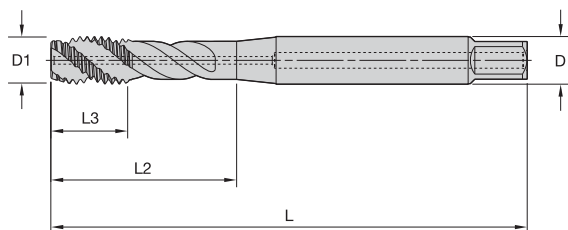


VICTORY

- first choice
- alternate choice

Shank Tolerance

D mm	tolerance h6
>3-6	+0, -0,008
>6-10	+0, -0,009
>10-18	+0, -0,011
>18-30	+0, -0,013
>30-50	+0, -0,016

■ GT33 • Form E Bottoming Chamfer • Through Coolant • Metric DIN 371, 374, and 376



GP6520	metric dimensions					number of flutes	dimension standard	class of fit
	D1 size	L	L3	L2	D			
GT335001	M5 X 0,8	70	10	25	6,0	3	DIN 371	6HX
GT335002	M6 X 1	80	10	30	6,0	3	DIN 371	6HX
GT335003	M8 X 1,25	90	13	35	8,0	3	DIN 371	6HX
GT335004	M10 X 1,5	100	15	39	10,0	3	DIN 371	6HX
GT335007	M12 X 1,5	100	15	39	9,0	4	DIN 374	6HX
GT335005	M12 X 1,75	110	18	44	9,0	4	DIN 376	6HX
GT335008	M14 X 1,5	100	15	47	11,0	4	DIN 374	6HX
GT335006	M14 X 2	110	20	52	11,0	4	DIN 376	6HX
GT335009	M16 X 1,5	100	15	46	12,0	4	DIN 374	6HX

High-Performance Taps


Victory™ Straight Flute HSS-E-PM Taps • Through and Blind Holes



- GP6520 TiCN for cast iron and cast aluminium



High-Performance Taps

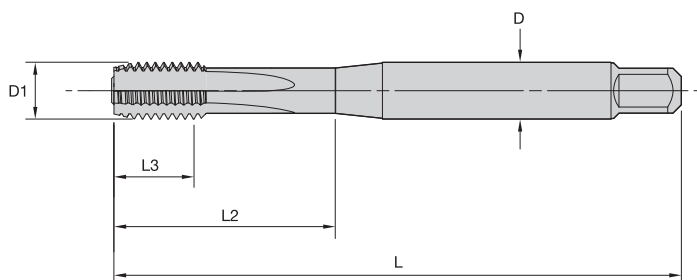

VICTORY


Shank Tolerance

D mm	tolerance h6
>3-6	+0, -0,008
>6-10	+0, -0,009
>10-18	+0, -0,011
>18-30	+0, -0,013
>30-50	+0, -0,016

- first choice
- alternate choice


New Sizes Available

■ GT40 • Form C Semi-Bottoming Chamfer • Metric DIN 371 and 376



GP6520	D1 size	metric dimensions				number of flutes	dimension standard	class of fit
		L	L3	L2	D			
GT405001	M4 X 0,7	63	10	21	4,5	3	DIN 371	6HX
GT405003	M6 X 1	80	10	30	6,0	4	DIN 371	6HX
GT405002	M5 X 0,8	70	10	25	6,0	3	DIN 371	6HX
GT405004	M8 X 1,25	90	13	35	8,0	4	DIN 371	6HX
GT405005	M10 X 1,5	100	15	39	10,0	4	DIN 371	6HX
GT405057	M12 X 1,5	100	15	39	9,0	4	DIN 374	6HX
GT405006	M12 X 1,75	110	18	44	9,0	4	DIN 376	6HX
GT405058	M14 X 1,5	100	15	47	11,0	4	DIN 374	6HX
GT405007	M14 X 2	110	20	52	11,0	4	DIN 376	6HX
GT405059	M16 X 1,5	100	15	46	12,0	4	DIN 374	6HX
GT405008	M16 X 2	110	20	51	12,0	4	DIN 376	6HX
GT405009	M18 X 2,5	125	25	58	14,0	4	DIN 376	6HX
GT405010	M20 X 2,5	140	25	64	16,0	4	DIN 376	6HX
GT405011	M22 X 2,5	140	25	70	18,0	4	DIN 376	6HX

- GP6520 TiCN for cast iron and cast aluminium

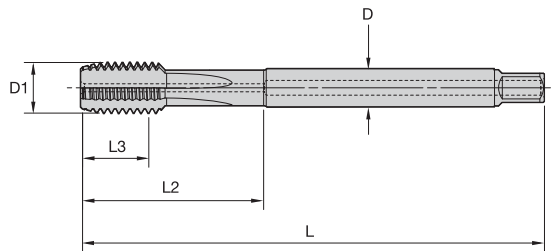

VICTORY


Shank Tolerance

D mm	tolerance h6
>3-6	+0, -0,008
>6-10	+0, -0,009
>10-18	+0, -0,011
>18-30	+0, -0,013
>30-50	+0, -0,016

- first choice
- alternate choice

New Sizes Available

- GT41 • Form C Semi-Bottoming Chamfer • Through Coolant • Metric DIN 371 and 376



GP6520	D1 size	metric dimensions				number of flutes	dimension standard	class of fit
		L	L3	L2	D			
GT415001	M4 X 0,7	63	10	21	4,5	3	DIN 371	6HX
GT415002	M5 X 0,8	70	10	25	6,0	3	DIN 371	6HX
GT415003	M6 X 1	80	10	30	6,0	4	DIN 371	6HX
GT415004	M8 X 1,25	90	13	35	8,0	4	DIN 371	6HX
GT415005	M10 X 1,5	100	15	39	10,0	4	DIN 371	6HX
GT415021	M12 X 1,5	100	15	39	9,0	4	DIN 374	6HX
GT415006	M12 X 1,75	110	18	44	9,0	4	DIN 376	6HX
GT415022	M14 X 1,5	100	15	47	11,0	4	DIN 374	6HX
GT415007	M14 X 2	110	20	52	11,0	4	DIN 376	6HX
GT415023	M16 X 1,5	100	15	46	12,0	4	DIN 374	6HX
GT415008	M16 X 2	110	20	51	12,0	4	DIN 376	6HX
GT415009	M18 X 2,5	125	25	58	14,0	4	DIN 376	6HX
GT415010	M20 X 2,5	140	25	64	16,0	4	DIN 376	6HX

High-Performance Taps


Victory™ Straight Flute HSS-E-PM Taps • Threading Close to the Bottom in Blind Holes



- GP6520 TiCN for cast iron and cast aluminium



High-Performance Taps

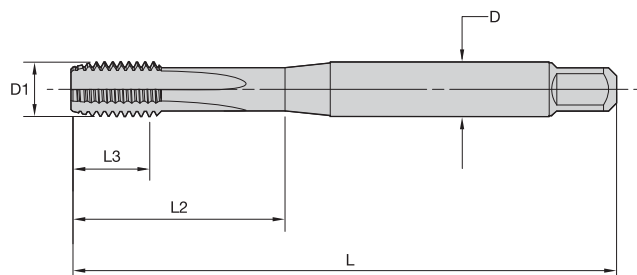


- first choice
- alternate choice

Shank Tolerance

D mm	tolerance h6
>3-6	+0, -0,008
>6-10	+0, -0,009
>10-18	+0, -0,011
>18-30	+0, -0,013
>30-50	+0, -0,016

■ GT42 • Form E Bottoming Chamfer • Metric DIN 371, 374, and 376




	D1 size	metric dimensions				number of flutes	dimension standard	class of fit
		L	L3	L2	D			
GP6520								
GT425001	M5 X 0,8	70	10	25	6,0	3	DIN 371	6HX
GT425002	M6 X 1	80	10	30	6,0	4	DIN 371	6HX
GT425003	M8 X 1,25	90	13	35	8,0	4	DIN 371	6HX
GT425004	M10 X 1,5	100	15	39	10,0	4	DIN 371	6HX
GT425007	M12 X 1,5	100	15	39	9,0	4	DIN 374	6HX
GT425005	M12 X 1,75	110	18	44	9,0	4	DIN 376	6HX
GT425008	M14 X 1,5	100	15	47	11,0	4	DIN 374	6HX
GT425006	M14 X 2	110	20	52	11,0	4	DIN 376	6HX
GT425009	M16 X 1,5	100	15	46	12,0	4	DIN 374	6HX

- GP6520 TiCN for cast iron and cast aluminium



High-Performance Taps

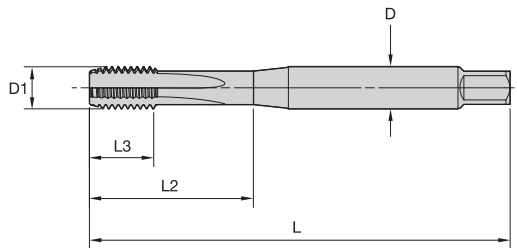


VICTORY

- first choice
- alternate choice

Shank Tolerance

D mm	tolerance h6
>3-6	+0, -0,008
>6-10	+0, -0,009
>10-18	+0, -0,011
>18-30	+0, -0,013
>30-50	+0, -0,016

■ GT43 • Form E Bottoming Chamfer • Through Coolant • Metric DIN 371, 374, and 376



metric dimensions						number of flutes	dimension standard	class of fit
GP6520	D1 size	L	L3	L2	D			
GT435001	M5 X 0,8	70	10	25	6,0	3	DIN 371	6HX
GT435002	M6 X 1	80	10	30	6,0	4	DIN 371	6HX
GT435003	M8 X 1,25	90	13	35	8,0	4	DIN 371	6HX
GT435004	M10 X 1,5	100	15	39	10,0	4	DIN 371	6HX
GT435007	M12 X 1,5	100	15	39	9,0	4	DIN 374	6HX
GT435005	M12 X 1,75	110	18	44	9,0	4	DIN 376	6HX
GT435008	M14 X 1,5	100	15	47	11,0	4	DIN 374	6HX
GT435006	M14 X 2	110	20	52	11,0	4	DIN 376	6HX
GT435009	M16 X 1,5	100	15	46	12,0	4	DIN 374	6HX

High-Performance Taps

Victory™ Spiral Point Plug HSS-E-PM Taps • Through Holes




- WN48EG DLC for aluminium



HSS-E



3.5-5



8°



DIN 371



DIN 376




6H



M

High-Performance Taps

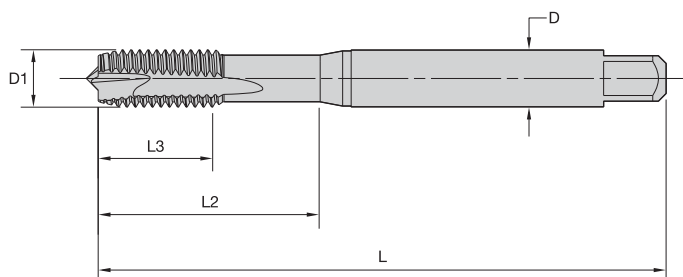


VICTORY

- first choice
- alternate choice

Shank Tolerance

D	tolerance h9
1-3	+0, -0,025
3,5-6	+0, -0,030
7-10	+0, -0,036
11-18	+0, -0,043


GT70 • Form B Plug Chamfer • Metric DIN 371 and 376



metric dimensions

WN48EG	D1 size	L	L3	L2	D	number of flutes	dimension standard	class of fit
GT705001	M3 X 0,5	56	11	18	3,5	2	DIN 371	6H
GT705002	M4 X 0,7	63	13	21	4,5	2	DIN 371	6H
GT705003	M5 X 0,8	70	15	25	6,0	2	DIN 371	6H
GT705004	M6 X 1	80	17	30	6,0	2	DIN 371	6H
GT705005	M8 X 1,25	90	20	35	8,0	2	DIN 371	6H
GT705006	M10 X 1,5	100	22	39	10,0	2	DIN 371	6H
GT705007	M12 X 1,75	110	24	—	9,0	3	DIN 376	6H
GT705008	M16 X 2	110	27	—	12,0	3	DIN 376	6H

- WN48EG DLC for aluminium

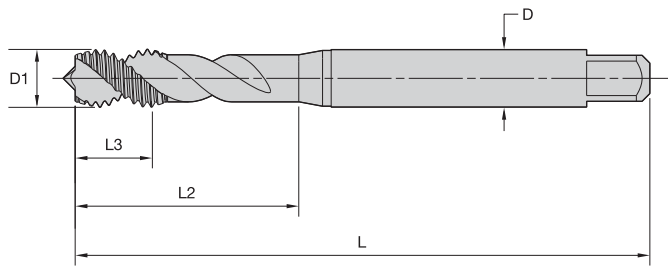

VICTORY

- first choice
- alternate choice

Shank Tolerance

D	tolerance h9
1-3	+0, -0,025
3,5-6	+0, -0,030
7-10	+0, -0,036
11-18	+0, -0,043

- GT80 • Form C Semi-Bottoming Chamfer • Metric DIN 371 and 376





	metric dimensions							
WN48EG	D1 size	L	L3	L2	D	number of flutes	dimension standard	class of fit
GT805001	M3 X 0,5	56	6	18	3,5	2	DIN 371	6H
GT805002	M4 X 0,7	63	7	21	4,5	2	DIN 371	6H
GT805003	M5 X 0,8	70	8	25	6,0	2	DIN 371	6H
GT805004	M6 X 1	80	10	30	6,0	2	DIN 371	6H
GT805005	M8 X 1,25	90	14	35	8,0	2	DIN 371	6H
GT805006	M10 X 1,5	100	16	39	10,0	2	DIN 371	6H
GT805007	M12 X 1,75	110	18	—	9,0	3	DIN 376	6H
GT805008	M16 X 2	110	22	—	12,0	3	DIN 376	6H
GT805009	M20 X 2,5	140	25	—	16,0	3	DIN 376	6H

High-Performance Taps

Victory™ Left-Hand Spiral Flute HSS-E-PM Taps • Through Holes



• GP6520 TiCN for steel and cast iron

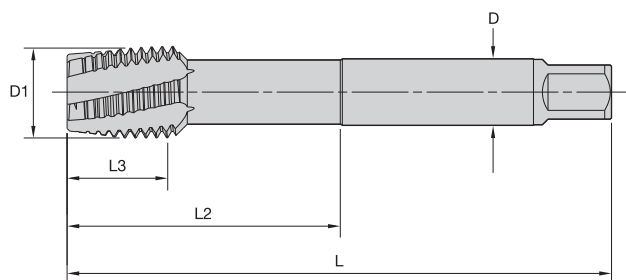


VICTORY


- first choice
- alternate choice

Shank Tolerance	
D	tolerance h6
12-18	+0, -0,011
20-30	+0, -0,013
32-36	+0, -0,016

■ GT20 • Form D Plug Chamfer • Larger Sizes • Metric DIN 376



	D1 size	L	L3	L2	D	number of flutes	dimension standard	class of fit
GP6520								
GT205111	M24 X 3	160	30	77	18,0	5	DIN 376	6HX
GT205113	M30 X 3,5	180	35	91	22,0	5	DIN 376	6HX
GT205114	M33 X 3,5	180	35	100	25,0	5	DIN 376	6HX
GT205116	M36 X 4	200	40	110	28,0	6	DIN 376	6HX
GT205118	M42 X 4,5	200	45	120	32,0	6	DIN 376	6HX

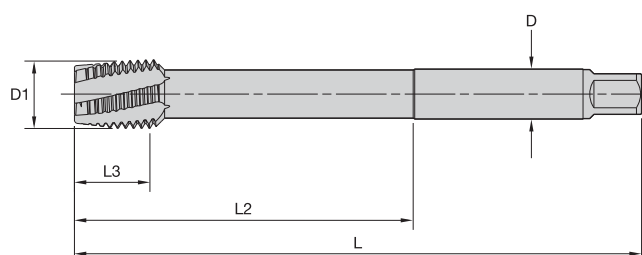


VICTORY

- first choice
- alternate choice


Shank Tolerance	
D	tolerance h6
12-18	+0, -0,011
20-30	+0, -0,013
32-36	+0, -0,016

■ GT20 • Form D Plug Chamfer • Larger Sizes • Metric Extra Long



	D1 size	L	L3	L2	D	number of flutes	class of fit
GP6520							
GT205122	M24 X 3	200	30	120	18,0	5	6HX
GT205124	M30 X 3,5	250	35	150	22,0	5	6HX
GT205125	M33 X 3,5	250	35	150	25,0	5	6HX
GT205127	M36 X 4	250	40	150	28,0	6	6HX
GT205129	M42 X 4,5	300	45	180	32,0	6	6HX

- GP6520 TiCN for steel and cast iron

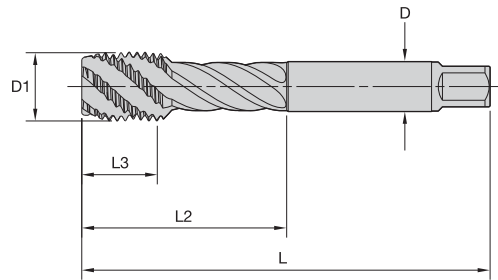

VICTORY

- first choice
- alternate choice


Shank Tolerance	
D	tolerance h6
12-18	+0, -0,011
20-30	+0, -0,013
32-36	+0, -0,016

High-Performance Taps

■ GT30 • Form C Semi-Bottoming Chamfer • Larger Sizes • Metric DIN 376




	D1 size	metric dimensions				number of flutes	dimension standard	class of fit
		L	L3	L2	D			
GP6520								
GT305161	M24 X 3	160	30	77	18,0	5	DIN 376	6HX
GT305163	M30 X 3,5	180	35	91	22,0	5	DIN 376	6HX
GT305164	M33 X 3,5	180	35	100	25,0	5	DIN 376	6HX
GT305166	M36 X 4	200	40	110	28,0	5	DIN 376	6HX
GT305168	M42 X 4,5	200	45	120	32,0	5	DIN 376	6HX

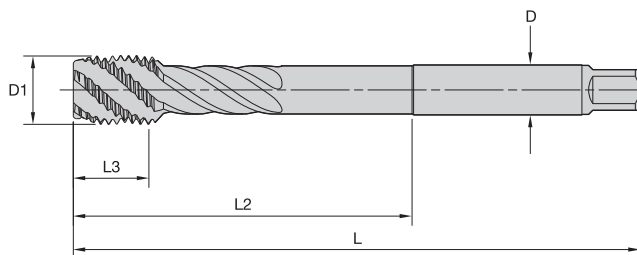
VICTORY

- first choice
- alternate choice

Shank Tolerance	
D	tolerance h6
12-18	+0, -0,011
20-30	+0, -0,013
32-36	+0, -0,016

■ GT30 • Form C Semi-Bottoming Chamfer • Larger Sizes • Metric Extra Long




	D1 size	metric dimensions				number of flutes	class of fit
		L	L3	L2	D		
GP6520							
GT305151	M24 X 3	200	30	120	18,0	5	6HX
GT305153	M30 X 3,5	250	35	150	22,0	5	6HX
GT305154	M33 X 3,5	250	35	150	25,0	5	6HX
GT305156	M36 X 4	250	40	150	28,0	5	6HX
GT305158	M42 X 4,5	300	45	180	32,0	5	6HX

High-Performance Taps

Victory™ Spiral Flute HSS-E-PM Taps • Blind Holes



- GP6520 TiCN for steel and cast iron

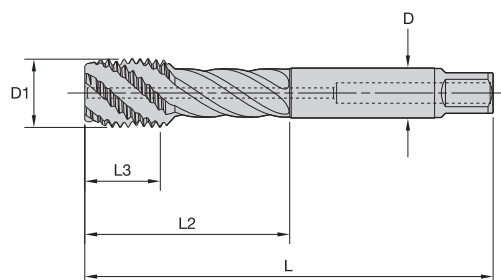


VICTORY


- first choice
- alternate choice

Shank Tolerance	
D	tolerance h6
12-18	+0, -0,011
20-30	+0, -0,013
32-36	+0, -0,016

- GT31 • Form C Semi-Bottoming Chamfer • Through Coolant • Larger Sizes • Metric DIN 376



GP6520	metric dimensions					number of flutes	dimension standard	class of fit
	D1 size	L	L3	L2	D			
GT315025	M24 X 3	160	30	77	18,0	5	DIN 376	6HX
GT315027	M30 X 3,5	180	35	91	22,0	5	DIN 376	6HX
GT315028	M33 X 3,5	180	35	100	25,0	5	DIN 376	6HX
GT315030	M36 X 4	200	40	110	28,0	5	DIN 376	6HX
GT315032	M42 X 4,5	200	45	120	32,0	5	DIN 376	6HX

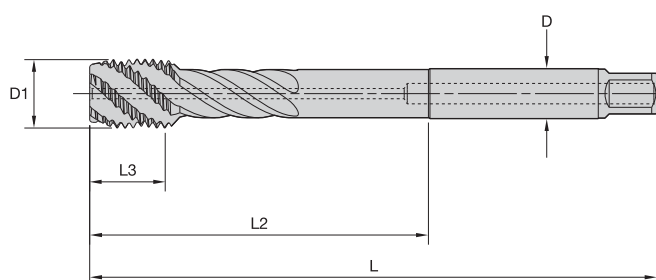


VICTORY

- first choice
- alternate choice


Shank Tolerance	
D	tolerance h6
12-18	+0, -0,011
20-30	+0, -0,013
32-36	+0, -0,016

- GT31 • Form C Semi-Bottoming Chamfer • Through Coolant • Larger Sizes • Metric Extra Long



GP6520	metric dimensions					number of flutes	class of fit
	D1 size	L	L3	L2	D		
GT315014	M24 X 3	200	30	120	18,0	5	6HX
GT315016	M30 X 3,5	250	35	150	22,0	5	6HX
GT315017	M33 X 3,5	250	35	150	25,0	5	6HX
GT315019	M36 X 4	250	40	150	28,0	5	6HX
GT315021	M42 X 4,5	300	45	180	32,0	5	6HX

- GP6520 TiCN for steel and cast iron

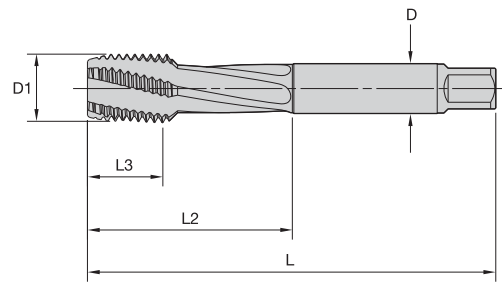

VICTORY

- first choice
- alternate choice


Shank Tolerance	
D	tolerance h6
12-18	+0, -0,011
20-30	+0, -0,013
32-36	+0, -0,016

High-Performance Taps

■ GT50 • Form C Semi-Bottoming Chamfer • Larger Sizes • Metric DIN 376




GP6520	metric dimensions					number of flutes	dimension standard	class of fit
	D1 size	L	L3	L2	D			
GT505001	M24 X 3	160	30	77	18,0	4	DIN 376	6HX
GT505002	M30 X 3,5	180	35	91	22,0	5	DIN 376	6HX
GT505003	M33 X 3,5	180	35	100	25,0	5	DIN 376	6HX
GT505004	M36 X 4	200	40	110	28,0	5	DIN 376	6HX
GT505005	M42 X 4,5	200	45	120	32,0	6	DIN 376	6HX

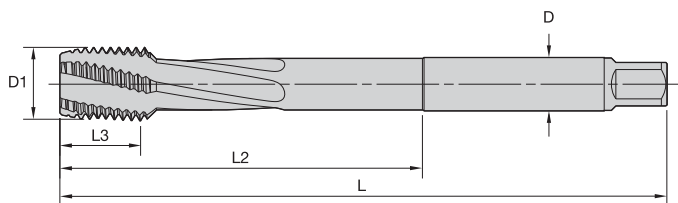
VICTORY

- first choice
- alternate choice

Shank Tolerance	
D	tolerance h6
12-18	+0, -0,011
20-30	+0, -0,013
32-36	+0, -0,016

■ GT50 • Form C Semi-Bottoming Chamfer • Larger Sizes • Metric Extra Long





GP6520	metric dimensions					number of flutes	class of fit
	D1 size	L	L3	L2	D		
GT505006	M24 X 3	200	30	120	18,0	4	6HX
GT505007	M30 X 3,5	250	35	150	22,0	5	6HX
GT505008	M33 X 3,5	250	35	150	25,0	5	6HX
GT505009	M36 X 4	250	40	150	28,0	5	6HX
GT505010	M42 X 4,5	300	45	180	32,0	6	6HX

High-Performance Taps

Victory™ Spiral Flute HSS-E-PM Taps • Blind Holes



- GP6520 TiCN for steel and cast iron

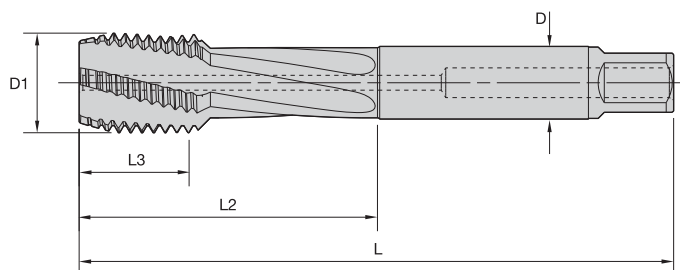


VICTORY

- first choice
- alternate choice


Shank Tolerance	
D	tolerance h6
12-18	+0, -0,011
20-30	+0, -0,013
32-36	+0, -0,016

- GT51 • Form C Semi-Bottoming Chamfer • Through Coolant • Larger Sizes • Metric DIN 376



metric dimensions

GP6520	D1 size	L	L3	L2	D	number of flutes	dimension standard	class of fit
GT515001	M24 X 3	160	30	77	18,0	4	DIN 376	6HX
GT515002	M30 X 3,5	180	35	91	22,0	5	DIN 376	6HX
GT515003	M33 X 3,5	180	35	100	25,0	5	DIN 376	6HX
GT515004	M36 X 4	200	40	110	28,0	5	DIN 376	6HX
GT515005	M42 X 4,5	200	45	120	32,0	6	DIN 376	6HX

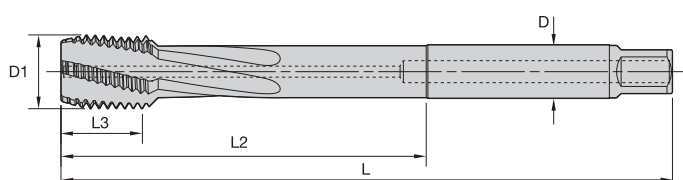


VICTORY

- first choice
- alternate choice

Shank Tolerance	
D	tolerance h6
12-18	+0, -0,011
20-30	+0, -0,013
32-36	+0, -0,016

- GT51 • Form C Semi-Bottoming Chamfer • Through Coolant • Larger Sizes • Metric Extra Long



metric dimensions

GP6520	D1 size	L	L3	L2	D	number of flutes	class of fit
GT515006	M24 X 3	200	30	120	18,0	4	6HX
GT515007	M30 X 3,5	250	35	150	22,0	5	6HX
GT515008	M33 X 3,5	250	35	150	25,0	5	6HX
GT515009	M36 X 4	250	40	150	28,0	5	6HX
GT515010	M42 X 4,5	300	45	180	32,0	6	6HX

■ HSS-E-PM Taps • Metric

HSS-E-PM Taps • Metric											
		 Through Holes					 Blind Holes				
Material Group	VDI 3323	Range — m/min					Range — m/min				
		Tap Style	Grade	min	Starting Value	max	Tap Style	Grade	min	Starting Value	max
P	1	GT20	GP6520	20	30	45	GT30,GT32,GT50	GP6520	14	21	32
		GT22	WP31MG	18	30	50	GT22	WP31MG	13	21	35
	2, 3, 4, 5	GT20	GP6520	17	25	38	GT30,GT32,GT50	GP6520	12	18	26
		GT22	WP31MG	15	25	42	GT22	WP31MG	10	18	29
	6, 7, 8, 10	GT20	GP6520	12	15	20	GT30,GT32,GT50	GP6520	8	11	14
	9	GT00	WP31MG	5	6	8	GT02, GT04	WP31MG	3	4	5
	12, 13, 1	GT20	GP6520	12	15	20	GT30,GT32,GT50	GP6520	8	11	14
M	14, 1, 14, 3	GT20	GM6515	12	15	20	GT30,GT32,GT50	GM6515	8	11	14
		GT20	GM6515	9	12	16	GT30,GT32,GT50	GM6515	6	8	11
	14, 4	GT00	WP31MG	4	5	7	GT02, GT04	WP31MG	3	4	5
K	15, 16	GT40	GP6520	35	45	59	GT40, GT42	GP6520	24	32	41
	17, 18, 19	GT40	GP6520	31	40	52	GT40, GT42	GP6520	22	28	36
N	21, 22	GT70	WN48EG	42	55	72	GT80	WN48EG	30	39	50
		GT22	WN48EG	37	55	83	GT22	WN48EG	26	39	58
	23, 24	GT40	GP6520	38	50	65	GT40, GT42	GP6520	27	35	46
		GT22	WN38MG	33	50	75	GT22	WN38MG	23	35	53
	26, 27, 28	GT40	GP6520	4	6	9	GT40, GT42	GP6520	3	4	5
S	31, 32	GT20	GP6520	8	12	18	GT30, GT32	GP6520	6	8	11
	33, 34, 35	GT10	WS32MG	3	5	8	GT12	WS32MG	3	4	5
	36, 37	GT14	WN35MG	3	4	6	GT16	WN35MG	2	3	4
H	38, 1	GT06	WN35MG	1,3	2,0	3,0	GT06	WN35MG	1,1	1,4	1,8
	38, 2	GT06	WN35MG	1,0	1,5	2,3	GT06	WN35MG	0,8	1,1	1,4
	40, 1, 40, 2	GT06	WN35MG	1,0	1,5	2,3	GT06	WN35MG	0,8	1,1	1,4

NOTE: Increase speed by up to 25% when using coolant taps (GT21, GT23, GT31, GT33, GT41, GT43, and GT51).
Use grade GP6505™ in steels. Use 50% of the recommended speed listed for grade GP6520™.

GT20 Series • Bearing Hub • 1070

Challenge: Improve productivity and tool life, and reduce cost per hole.

P (Steel)	1070 Forged (38 Rc)
Machine Centre:	CNC Horizontal (Flexible Tension/Compression Tap Holder)
Tool Manufacturer:	COMPETITOR WIDIA-GTD™
Tap Size and Pitch:	M14 x 1.50 H6 M14 x 1.50 6HX
Tap Part ID:	Special GT205108
Tap Material and Coating:	HSS-E/Nitride-Oxide GP6520™
Coolant and Delivery:	External Emulsion External Emulsion
Speed (RPM):	398 416
Thread Depth:	14mm 14mm
Number of Holes Tapped:	3.360 5.450
Cost per Hole:	0,0085 € 0,007 €



GT30 Series • Coupling • 1045

Challenge: Improve productivity and tool life, and reduce cost per hole.

P (Steel)	1045 Annealed (23 Rc)
Machine Centre:	CNC Vertical (Flexible Tension/Compression. Tap Holder)
Tool Manufacturer:	COMPETITOR WIDIA-GTD™
Tap Size and Pitch:	1/2-20 H5 1/2-20 3BX
Tap Part ID:	2942601 GT305147
Tap Material and Coating:	HSS-E/Oxide GP6505™
Coolant and Delivery:	External Emulsion External Emulsion
Speed (RPM):	611 764
Thread Depth:	28mm 28mm
Number of Holes Tapped:	9.900 17.820
Cost per Hole:	0,0022 € 0,0019 €



GT30 Series • **Manifold** • 304 SS

Challenge: Improve productivity and tool life, and reduce cost per hole.

M (Stainless Steel)

304 SS Casting

Machine Centre:	CNC Vertical (Rigid Tap Holder)
Tool Manufacturer:	COMPETITOR
Tap Size and Pitch:	M6 x 1.0 6HX
Tap Part ID:	—
Tap Material and Coating:	HSS-E-PM/Oxide
Coolant and Delivery:	External Emulsion
Speed (RPM):	212
Thread Depth:	12mm
Number of Holes Tapped:	7.200
Cost per Hole:	0,005 €

WIDIA-GTD™

M6 x 1.0 6HX
GT305064
GM6515™
External Emulsion
796
12mm
13.008
0,0023 €



High-Performance Taps

GT43 Series • **Wheel Hub** • Grey Cast Iron

Challenge: Improve productivity without sacrificing thread finish or scrapping parts due to tap breakage.

K (Cast Iron)

A48-55 B Grey Cast Iron

Machine Centre:	CNC Horizontal (Rigid Tap Holder)
Tool Manufacturer:	COMPETITOR
Tap Size and Pitch:	M8 x 1.25 D5
Tap Part ID:	1105200208
Tap Material and Coating:	HSS-E-PM/TiCN
Coolant and Delivery:	Internal Emulsion
Speed (RPM):	728
Thread Depth:	11,5mm
Number of Holes Tapped:	4.389
Cost per Hole:	0,005 €

WIDIA-GTD™

M8 x 1.25 6HX
GT435003
GP6520™
Internal Emulsion
1334
11,5mm
7.680
0,004 €



Steel <32 HRC • Selector

High-Performance Taps

typical thread sizes		required tap drill diameter						P			
								HSS-E-PM Taps		HSS-E-PM Taps	
								ANSI		DIN 371, 374, 376	
cutting taps								blind hole	through hole	blind hole	through hole
metric	inch	mm	inch	fraction	wire			GT30_GP6520	GT20_GP6520	GT30_GP6520	GT20_GP6520
M3 x 0,50	—	2,500	.0984	—	—			GT305070	GT205069	GT305097	GT205094
—	6-32	2,705	.1065	—	36			GT305035	GT205037	—	—
M4 x 0,70	—	3,300	.1299	—	—			GT305071	GT205070	GT305098	GT205095
—	8-32	3,454	.1360	—	29			GT305036	GT205039	—	—
—	8-36	3,454	.1360	—	29			—	GT205052	—	—
—	10-24	3,734	.1470	—	26			—	GT205040	—	—
—	10-32	4,039	.1590	—	21			GT305053	GT205054	—	—
M5 x 0,80	—	4,200	.1654	—	—			GT305072	GT205071	GT305099	GT205096
M6 x 1,00	—	5,000	.1969	—	—			GT305073	GT205072	GT305100	GT205097
—	1/4-20	5,106	.2010	—	7			GT305039	GT205043	—	—
—	1/4-28	5,410	.2130	—	3			GT305055	GT205056	—	—
—	5/16-18	6,528	.2570	—	F			GT305041	GT205045	—	—
M8 x 1,25	—	6,700	.2638	—	—			GT305074	GT205074	GT305101	GT205098
—	5/16-24	6,909	.2720	—	I			GT305057	GT205057	—	—
M8 x 1,00	—	7,000	.2756	—	—			—	—	GT305109	GT205104
—	3/8-16	7,938	.3125	5/16	—			GT305043	GT205047	—	—
—	3/8-24	8,433	.3320	—	Q			GT305058	GT205058	—	—
M10 x 1,50	—	8,500	.3346	—	—			GT305075	GT205075	GT305102	GT205099
M10 x 1,25	—	8,700	.3425	—	—			—	—	GT305111	GT205106
M10 x 1,00	—	9,000	.3543	—	—			—	—	GT305110	GT205105
—	7/16-14	9,093	.3580	—	T			GT305044	GT205048	—	—
—	7/16-20	9,921	.3906	25/64	—			GT305059	GT205059	—	—
M12 x 1,75	—	10,200	.4016	—	—			GT305076	GT205076	GT305103	GT205100
M12 x 1,50	—	10,500	.4134	—	—			—	—	GT305112	GT205107
—	1/2-13	10,716	.4219	27/64	—			GT305046	GT205049	—	—
—	1/2-20	11,509	.4531	29/64	—			GT305060	GT205060	—	—
M14 x 2,00	—	12,000	.4724	—	—			GT305077	—	GT305104	GT205101
M14 x 1,50	—	12,500	.4921	—	—			—	—	GT305113	GT205108
—	5/8-11	13,495	.5313	17/32	—			GT305048	GT205050	—	—
M16 x 2,00	—	14,000	.5512	—	—			GT305078	—	GT305105	GT205102
M16 x 1,50	—	14,500	.5709	—	—			—	—	GT305114	GT205109
M18 x 2,50	—	15,500	.6102	—	—			—	—	GT305106	—
M18 x 1,50	—	16,500	.6496	—	—			—	—	GT305115	GT205110
—	3/4-10	16,670	.6563	21/32	—			GT305050	GT2050551	—	—
M20 x 2,50	—	17,500	.6890	—	—			—	—	—	GT205103
M22 x 2,50	—	19,500	.7677	—	—			—	—	GT305107	—
M24 x 3,00	—	21,000	.8268	—	—			—	—	GT305161	GT205111
—	1-8	22,225	.8750	7/8	—			GT305051	—	—	—

P		P		All Materials	
HSS-E-PM Taps		Recommended SC Drill		Alternate Tap Drill	
 DIN 371, 374, 376 blind hole with coolant GT31_GP6520 through hole with coolant GT21_GP6520		 approximately 5 x D with coolant approximately 5 x D non-coolant TDS402 WP20PD TDS202 WP20PD		 approximately 5 x D with coolant approximately 5 x D non-coolant VDS402A WU25PD VDS202A WU25PD	
—	—	TDS402A02500	TDS202A02500	VDS402A02500	VDS202A02500
—	—	TDS402A02705	TDS202A02705	VDS402A02705	VDS202A02705
—	—	TDS402A03300	TDS202A03300	VDS402A03300	VDS202A03300
—	—	TDS402A03454	TDS202A03454	VDS402A03454	VDS202A03454
—	—	TDS402A03700	TDS202A03700	VDS402A03700	VDS202A03700
—	—	TDS402A03797	TDS202A03797	VDS402A03797	VDS202A03797
—	—	TDS402A04100	TDS202A04100	VDS402A04100	VDS202A04100
GT315007	GT215007	TDS402A04219	TDS202A04219	VDS402A04219	VDS202A04219
GT315008	GT215008	TDS402A05055	TDS202A05055	VDS402A05055	VDS202A05055
—	—	TDS402A05410	TDS202A05410	VDS402A05410	VDS202A05410
—	—	TDS402A05600	TDS202A05600	VDS402A05600	VDS202A05600
—	—	TDS402A06600	TDS202A06600	VDS412A06600	VDS212A06600
GT315009	GT215009	TDS402A06906	TDS202A06906	VDS412A06906	VDS212A06906
—	—	TDS402A07000	TDS202A07000	VDS412A07000	VDS212A07000
—	—	TDS402A07366	TDS202A07366	VDS412A07366	VDS212A07366
—	—	TDS402A08433	TDS202A08433	VDS412A08433	VDS212A08433
—	—	TDS402A08500	TDS202A08500	VDS412A08500	VDS212A08500
GT315010	GT215010	TDS402A08700	TDS202A08700	VDS412A08700	VDS212A08700
—	—	TDS402A09000	TDS202A09000	VDS412A09000	VDS212A09000
—	—	TDS402A08839	TDS202A08839	VDS412A08839	VDS212A08839
—	—	TDS402A09400	TDS202A09400	VDS412A09400	VDS212A09400
—	—	TDS402A10200	TDS202A10200	VDS412A10200	VDS212A10200
GT315011	GT215011	TDS402A10262	TDS202A10262	VDS412A10262	VDS212A10262
—	—	TDS402A10716	TDS202A10716	VDS412A10716	VDS212A10716
—	—	TDS402A10800	TDS202A10800	VDS412A10800	VDS212A10800
—	—	TDS402A11908	TDS202A11908	VDS412A11908	VDS212A11908
GT315012	GT215012	TDS402A12251	TDS202A12251	VDS412A12251	VDS212A12251
—	—	TDS402A12800	TDS202A12800	VDS412A12800	VDS212A12800
—	—	TDS402A13500	TDS202A13500	VDS412A13500	VDS212A13500
—	—	TDS402A14500	TDS202A14500	VDS412A14500	VDS212A14500
—	—	TDS402A14684	TDS202A14684	VDS412A14684	VDS212A14684
—	—	TDS402A16500	TDS202A16500	VDS412A16500	VDS212A16500
—	—	TDS402A16670	TDS202A16670	VDS412A16670	VDS212A16670
—	—	TDS402A17000	TDS202A17000	VDS412A17000	VDS212A17000
—	—	TDS402A17859	TDS202A17859	VDS412A17859	VDS212A17859
—	—	—	—	—	—
GT315025	—	TDM220R3SCF25M	TDM220R5SCF25M	—	—
—	—	TDM230R3SCF25M	TDM230R5SCF25M	—	—

Steel 32–44 HRC • Selector

typical thread sizes	required tap drill diameter	
	mm	inch
cutting taps metric		
M3 x 0,50	2,500	.0984
M4 x 0,70	3,300	.1299
M5 x 0,80	4,200	.1654
M6 x 1,00	5,000	.1969
M8 x 1,25	6,700	.2638
M8 x 1,00	7,000	.2756
M10 x 1,50	8,500	.3346
M10 x 1,25	8,700	.3425
M10 x 1,00	9,000	.3543
M12 x 1,75	10,200	.4016
M12 x 1,50	10,500	.4134
M12 x 1,25	10,800	.4252
M14 x 2,00	12,000	.4724
M14 x 1,50	12,500	.4921
M16 x 2,00	14,000	.5512
M16 x 1,50	14,500	.5709
M18 x 2,50	15,500	.6102
M18 x 1,50	16,500	.6496
M20 x 2,50	17,500	.6890

P HSS-E-PM Taps — Tapping Steel 32–44 HRC		
DIN 371, 374, 376		
blind hole GT02_WP31MG	blind hole (3 x D) GT04_WH36MG	through hole GT00_WP31MG
GT025001	GT045001	GT005001
GT025002	GT045002	GT005002
GT025003	GT045003	GT005003
GT025004	GT045004	GT005004
GT025005	GT045005	GT005005
GT025012	GT045012	GT005012
GT025006	GT045006	GT005006
GT025014	GT045014	GT005014
GT025013	GT045013	GT005013
GT025007	GT045007	GT005007
GT025016	GT045016	GT005016
GT025015	GT045015	GT005015
GT025008	GT045008	GT005008
GT025017	GT045017	GT005017
GT025009	GT045009	GT005009
GT025018	GT045018	GT005018
GT025010	GT045010	GT005010
GT025010	GT045010	GT005010
GT025011	GT045011	GT005011

Steel • Forming Taps • Selector

typical thread sizes	required tap drill diameter	
	mm	inch
cutting taps metric		
M3 x 0,50	2,800	.1102
M4 x 0,70	3,700	.1457
M5 x 0,80	4,700	.1850
M6 x 1,00	5,600	.2205
M8 x 1,25	7,400	.2913
M8 x 1,00	7,600	.2992
M10 x 1,50	9,400	.3701
M10 x 1,25	9,500	.3740
M10 x 1,00	9,500	.3740
M12 x 1,75	11,300	.4449
M12 x 1,50	11,300	.4449
M12 x 1,25	11,500	.4528
M14 x 1,50	13,400	.5276
M16 x 2,00	15,200	.5984
M16 x 1,50	15,400	.6063

P Steel <32 HRC — Forming Taps		
DIN 2174		
blind and through hole GT22_WP31MG		blind and through hole with coolant GT23_WP31MG
GT225016		—
GT225017		—
GT225018		GT235012
GT225019		GT235013
GT225020		GT235014
GT225024		GT235018
GT225021		GT235015
GT225026		—
GT225025		GT235019
GT225022		GT235016
GT225028		GT235020
GT225027		—
GT225029		GT235021
GT225023		GT235017
GT225030		GT235022

P		All Materials	
Recommended SC Drill		Alternate Tap Drill	
			
approximately 5 x D with coolant TDS402 WP20PD	approximately 5 x D without coolant TDS202 WP20PD	approximately 5 x D with coolant VDS402A WU25PD	approximately 5 x D non-coolant VDS202A WU25PD
TDS402A02500	TDS202A02500	VDS402A02500	VDS202A02500
TDS402A03300	TDS202A03300	VDS402A03300	VDS202A03300
TDS402A04219	TDS202A04219	VDS402A04219	VDS202A04219
TDS402A05055	TDS202A05055	VDS402A05055	VDS202A05055
TDS402A06906	TDS202A06906	VDS412A06906	VDS212A06906
TDS402A07366	TDS202A07366	VDS412A07366	VDS212A07366
TDS402A08700	TDS202A08700	VDS412A08700	VDS212A08700
TDS402A09000	TDS202A09000	VDS412A09000	VDS212A09000
TDS402A08839	TDS202A08839	VDS412A08839	VDS212A08839
TDS402A10262	TDS202A10262	VDS412A10262	VDS212A10262
TDS402A10716	TDS202A10716	VDS412A10716	VDS212A10716
TDS402A11300	TDS202A11300	VDS412A11300	VDS212A11300
TDS402A12251	TDS202A12251	VDS412A12251	VDS212A12251
TDS402A12800	TDS202A12800	VDS412A12800	VDS212A12800
TDS402A14500	TDS202A14500	VDS412A14500	VDS212A14500
TDS402A14684	TDS202A14684	VDS412A14684	VDS212A14684
TDS402A16500	TDS202A16500	VDS412A16500	VDS212A16500
TDS402A16670	TDS202A16670	VDS412A16670	VDS212A16670
TDS402A17859	TDS202A17859	VDS412A17859	VDS212A17859

P		All Materials	
Recommended SC Drill		Alternate Tap Drill	
			
approximately 5 x D with coolant TDS402 WP20PD	approximately 5 x D without coolant TDS202 WP20PD	approximately 5 x D with coolant VDS402A WU25PD	approximately 5 x D non-coolant VDS202A WU25PD
TDS402A02800	TDS202A02800	VDS402A02800	VDS202A02800
TDS402A03734	TDS202A03734	VDS402A03734	VDS202A03734
TDS402A05000	TDS202A05000	VDS402A05000	VDS202A05000
TDS402A05791	TDS202A05791	VDS402A05791	VDS202A05791
TDS402A07493	TDS202A07493	VDS412A07493	VDS212A07493
TDS402A07938	TDS202A07938	VDS412A07938	VDS212A07938
TDS402A09500	TDS202A09500	VDS412A09500	VDS212A09500
TDS402A09500	TDS202A09500	VDS412A09500	VDS212A09500
TDS402A09921	TDS202A09921	VDS412A09921	VDS212A09921
TDS402A11300	TDS202A11300	VDS412A11300	VDS212A11300
TDS402A11500	TDS202A11500	VDS412A11500	VDS212A11500
TDS402A11509	TDS202A11509	VDS412A11509	VDS212A11509
TDS402A13400	TDS202A13400	VDS412A13400	VDS212A13400
TDS402A15250	TDS202A15250	VDS412A15250	VDS212A15250
TDS402A15500	TDS202A15500	VDS412A15500	VDS212A15500

Stainless Steel • Selector

High-Performance Taps

							M			
							HSS-E-PM Taps		HSS-E-PM Taps	
typical thread sizes		required tap drill diameter								
cutting taps							ANSI		DIN 371, 374, 376	
metric	inch	mm	inch	fraction	wire	blind hole GT30_GM6515	through hole GT20_GM6515	blind hole GT30_GM6515	through hole GT20_GM6515	
M3 x 0,50	—	2,500	.0984	—	—	GT305061	GT205061	GT305148	GT205077	
—	6-32	2,705	.1065	—	36	GT305005	GT205007	—	—	
M4 x 0,70	—	3,300	.1299	—	—	GT305062	GT205062	GT305079	GT205078	
—	8-32	3,454	.1360	—	29	GT305006	GT205008	—	—	
—	8-36	3,454	.1360	—	29	—	GT205022	—	—	
—	10-24	3,734	.1470	—	26	GT305007	GT205010	—	—	
—	10-32	4,039	.1590	—	21	GT305023	GT205024	—	—	
M5 x 0,80	—	4,200	.1654	—	—	GT305063	GT205063	GT305080	GT205079	
—	12-24	4,496	.1770	—	16	—	GT205011	—	—	
M6 x 1,00	—	5,000	.1969	—	—	GT305064	GT205064	GT305081	GT205080	
—	1/4-20	5,106	.2010	—	7	GT305009	GT205013	—	—	
—	1/4-28	5,410	.2130	—	3	GT305025	GT205026	—	—	
—	5/16-18	6,528	.2570	—	F	GT305011	GT205015	—	—	
M8 x 1,25	—	6,700	.2638	—	—	GT305065	GT205066	GT305082	GT205081	
—	5/16-24	6,909	.2720	—	I	GT305027	GT205027	—	—	
M8 x 1,00	7.000	0,2756	—	—	—	—	GT305090	GT205087	—	
—	3/8-16	7,938	.3125	5/16	—	GT305013	GT205017	—	—	
—	3/8-24	8,433	.3320	—	Q	GT305028	GT205028	—	—	
M10 x 1,50	—	8,500	.3346	—	—	GT305066	GT205067	GT305083	GT205082	
M10 x 1,25	8.700	0,3425	—	—	—	—	GT305092	GT205089	—	
M10 x 1,00	9.000	0,3543	—	—	—	—	GT305091	GT205088	—	
—	7/16-14	9,093	.3580	—	T	GT305014	GT205018	—	—	
—	7/16-20	9,921	.3906	25/64	—	GT305029	GT205029	—	—	
M12 x 1,75	—	10,200	.4016	—	—	GT305067	GT205068	GT305084	GT205083	
M12 x 1,50	—	10,500	.4134	—	—	—	—	GT305093	GT205090	
—	1/2-13	10,716	.4219	27/64	—	GT305016	GT205019	—	—	
—	1/2-20	11,509	.4531	29/64	—	GT305030	GT205030	—	—	
M14 x 2,00	—	12,000	.4724	—	—	GT305068	—	GT305085	GT205084	
M14 x 1,50	—	12,500	.4921	—	—	—	—	GT305094	GT205091	
—	5/8-11	13,495	.5313	17/32	—	GT305018	GT205020	—	—	
M16 x 2,00	—	14,000	.5512	—	—	GT305069	—	GT305086	GT205085	
M16 x 1,50	—	14,500	.5709	—	—	—	—	GT305095	GT205092	
M18 x 2,50	—	15,500	.6102	—	—	—	—	GT305087	—	
M18 x 1,50	—	16,500	.6496	—	—	—	—	GT305096	GT205093	
—	3/4-10	16,670	.6563	21/32	—	GT305020	GT205021	—	—	
M20 x 2,50	—	17,500	.6890	—	—	—	—	—	GT205086	
M22 x 2,50	—	19,500	.7677	—	—	—	—	GT305088	—	
M24 x 3,00	—	21,000	.8268	—	—	—	—	GT305089	—	
—	1—8	22.225	.8750	7/8	—	GT305021	—	—	—	

HSS-E-PM Taps		M		All Materials	
DIN 371, 374, 376		Recommended SC Drill		Alternate Tap Drill	
blind hole with coolant GT31_GM6515	through hole with coolant GT21_GM6515	approximately 3 x D with coolant WD 412522	approximately 5 x D with coolant WD 412527	approximately 3 x D with coolant VDS401A WU25PD	approximately 5 x D with coolant VDS402A WU25PD
—	—	—	—	VDS401A02500	VDS402A02500
—	—	—	—	VDS401A02705	VDS402A02705
—	—	412522—00330	412527—00330	VDS401A03300	VDS402A03300
—	—	—	—	VDS401A03454	VDS402A03454
—	—	—	—	VDS401A03454	VDS402A03454
—	—	—	—	VDS401A03734	VDS402A03734
—	—	—	—	VDS401A04039	VDS402A04039
GT315001	GT215001	412522—00420	412527—00420	VDS401A04200	VDS402A04200
—	—	—	—	VDS401A04496	VDS402A04496
GT315002	GT215002	412522—00500	412527—00500	VDS401A05000	VDS402A05000
—	—	—	—	VDS401A05106	VDS402A05106
—	—	—	—	VDS401A05410	VDS402A05410
—	—	412522—00652	412527—00652	VDS401A06528	VDS402A06528
GT315003	GT215003	412522—00670	412527—00670	VDS411A06700	VDS412A06700
—	—	—	—	VDS411A06906	VDS412A06906
—	—	412522—00700	412527—00700	VDS411A07000	VDS412A07000
—	—	412522—00793	412527—00793	VDS411A07938	VDS412A07938
—	—	—	—	VDS411A08433	VDS412A08433
GT315004	GT215004	412522—00850	412527—00850	VDS411A08500	VDS412A08500
—	—	412522—00870	412527—00870	VDS411A08700	VDS412A08700
—	—	412522—00900	412527—00900	VDS411A09000	VDS412A09000
—	—	—	—	VDS411A09093	VDS412A09093
—	—	412522—00992	412527—00992	VDS411A09921	VDS412A09921
GT315005	GT215005	412522—01020	412527—01020	VDS411A10200	VDS412A10200
—	—	412522—01050	412527—01050	VDS411A10500	VDS412A10500
—	—	412522—01072	412527—01072	VDS411A10716	VDS412A10716
—	—	—	—	VDS411A11509	VDS412A11509
GT315006	GT215006	412522—01200	412527—01200	VDS411A12000	VDS412A12000
—	—	412522—01250	412527—01250	VDS411A12500	VDS412A12500
—	—	—	—	VDS411A13495	VDS412A13495
—	—	412522—01400	412527—01400	VDS411A14000	VDS412A14000
—	—	412522—01450	412527—01450	VDS411A14500	VDS412A14500
—	—	412522—01550	412527—01550	VDS411A15500	VDS412A15500
—	—	412522—01650	412527—01650	VDS411A16500	VDS412A16500
—	—	—	—	VDS411A16670	VDS412A16670
—	—	412522—01750	412527—01750	VDS411A17500	VDS412A17500
—	—	412522—01950	412527—01950	VDS411A19500	VDS412A19500
		Recommended Modular Drill			
		insert	tool body 3 x D		
—	—	TDM2100UPM	TDM210R3SCF25M	—	—
—	—	TDM2223UPM	TDM0886R3SS088	—	—

Cast Iron • Selector

typical thread sizes		required tap drill diameter				K			K
						HSS-E-PM Taps			Recommended SC Drill
cutting taps						ANSI	DIN 371, 374, 376		
metric	inch	mm	inch	fraction	wire	blind and through hole GT40_GP6520	blind and through hole GT40_GP6520	blind and through hole with coolant GT41_GP6520	approximately 3 x D with coolant TDS411 WK15PD
M3 x 0,50	—	2,500	.0984	—	—	GT405030	—	—	TDS401A02500
M4 x 0,70	—	3,300	.1299	—	—	GT405031	GT405001	GT415001	TDS401A03300
—	10-24	3,734	.1470	—	26	GT405012	—	—	TDS401A03734
—	10-32	4,039	.1590	—	21	GT405013	—	—	TDS401A04039
M5 x 0,80	—	4,200	.1654	—	—	GT405032	GT405002	GT415002	TDS401A04200
M6 x 1,00	—	5,000	.1969	—	—	GT405033	GT405003	GT415003	TDS401A05000
—	1/4-20	5,106	.2010	—	7	GT405015	—	—	TDS401A05106
—	1/4-28	5,410	.2130	—	3	GT405017	—	—	TDS401A05410
—	5/16-18	6,528	.2570	—	F	GT405019	—	—	TDS401A06528
M8 x 1,25	—	6,700	.2638	—	—	GT405034	GT405004	GT415004	TDS411A06700
—	5/16-24	6,909	.2720	—	I	GT405020	—	—	TDS411A06906
—	3/8-16	7,938	.3125	5/16	—	GT405022	—	—	TDS411A07938
—	3/8-24	8,433	.3320	—	Q	GT405023	—	—	TDS411A08433
M10 x 1,50	—	8,500	.3346	—	—	GT405035	GT405005	GT415005	TDS411A08500
—	7/16-14	9,093	.3580	—	T	GT405024	—	—	TDS411A09093
—	7/16-20	9,921	.3906	25/64	—	GT405025	—	—	TDS411A09921
M12 x 1,75	—	10,200	.4016	—	—	GT405036	GT405006	GT415006	TDS411A10200
—	1/2-13	10,716	.4219	27/64	—	GT405026	—	—	TDS411A10716
—	1/2-20	11,509	.4531	29/64	—	GT405027	—	—	TDS411A11509
M14 x 2,00	—	12,000	.4724	—	—	GT405037	GT405007	GT415007	TDS411A12000
—	5/8-11	13,495	.5313	17/32	—	GT405028	—	—	TDS411A13495
M16 x 2,00	—	14,000	.5512	—	—	GT405038	GT405008	GT415008	TDS411A14000
M18 x 2,50	—	15,500	.6102	—	—	—	GT405009	GT415009	TDS411A15500
—	3/4-10	16,670	.6563	21/32	—	GT405029	—	—	TDS411A16670
M20 x 2,50	—	17,500	.6890	—	—	—	GT405010	GT415010	TDS411A17500
M22 x 2,50	—	19,500	.7677	—	—	—	GT405011	—	TDS411A19500

K		All Materials		
Recommended SC Drill		Alternate Tap Drill		
				
approximately 5 x D with coolant TDS412 WK15PD	approximately 5 x D non-coolant TDS212 WK15PD	approximately 3 x D with coolant VDS401A WU25PD	approximately 5 x D with coolant VDS402A WU25PD	approximately 5 x D non-coolant VDS202A WU25PD
TDS402A02500	TDS212A02500	VDS401A02500	VDS402A02500	VDS202A02500
TDS402A03300	TDS212A03300	VDS401A03300	VDS402A03300	VDS202A03300
TDS402A03734	TDS212A03734	VDS401A03734	VDS402A03734	VDS202A03734
TDS402A04039	TDS212A04039	VDS401A04039	VDS402A04039	VDS202A04039
TDS402A04200	TDS212A04200	VDS401A04200	VDS402A04200	VDS202A04200
TDS402A05000	TDS212A05000	VDS401A05000	VDS402A05000	VDS202A05000
TDS402A05106	TDS212A05106	VDS401A05106	VDS402A05106	VDS202A05106
TDS402A05410	TDS212A05410	VDS401A05410	VDS402A05410	VDS202A05410
TDS402A06528	TDS212A06528	VDS401A06528	VDS402A06528	VDS202A06528
TDS412A06700	TDS212A06700	VDS411A06700	VDS412A06700	VDS212A06700
TDS412A06906	TDS212A06906	VDS411A06906	VDS412A06906	VDS212A06906
TDS412A07938	TDS212A07938	VDS411A07938	VDS412A07938	VDS212A07938
TDS412A08433	TDS212A08433	VDS411A08433	VDS412A08433	VDS212A08433
TDS412A08500	TDS212A08500	VDS411A08500	VDS412A08500	VDS212A08500
TDS412A09093	TDS212A09093	VDS411A09093	VDS412A09093	VDS212A09093
TDS412A09921	TDS212A09921	VDS411A09921	VDS412A09921	VDS212A09921
TDS412A10200	TDS212A10200	VDS411A10200	VDS412A10200	VDS212A10200
TDS412A10716	TDS212A10716	VDS411A10716	VDS412A10716	VDS212A10716
TDS412A11509	TDS212A11509	VDS411A11509	VDS412A11509	VDS212A11509
TDS412A12000	TDS212A12000	VDS411A12000	VDS412A12000	VDS212A12000
TDS412A13495	TDS212A13495	VDS411A13495	VDS412A13495	VDS212A13495
TDS412A14000	TDS212A14000	VDS411A14000	VDS412A14000	VDS212A14000
TDS412A15500	TDS212A15500	VDS411A15500	VDS412A15500	VDS212A15500
TDS412A16670	TDS212A16670	VDS411A16670	VDS412A16670	VDS212A16670
TDS412A17500	TDS212A17500	VDS411A17500	VDS412A17500	VDS212A17500
TDS412A19500	TDS212A19500	VDS411A19500	VDS412A19500	VDS212A19500

Aluminium • Selector

		N					
		HSS-E-PM Taps (Wrought, low Si)				HSS-E-PM Taps (Cast <12%)	
		DIN 371, 374, 376				ANSI	
typical thread sizes		required tap drill diameter				blind and through hole	
cutting taps							
metric	inch	mm	inch	fraction	wire	GT80_WN48EG	GT70_WN48EG
M3 x 0,50	—	2,500	.0984	—	—	GT805001	GT705001
M4 x 0,70	—	3,300	.1299	—	—	GT805002	GT705002
—	10-24	3,734	.1470	—	26	—	—
—	10-32	4,039	.1590	—	21	—	—
M5 x 0,80	—	4,200	.1654	—	—	GT805003	GT705003
M6 x 1,00	—	5,000	.1969	—	—	GT805004	GT705004
—	1/4-20	5,106	.2010	—	7	—	—
—	1/4-28	5,410	.2130	—	3	—	—
—	5/16-18	6,528	.2570	—	F	—	—
M8 x 1,25	—	6,700	.2638	—	—	GT805005	GT705005
—	5/16-24	6,909	.2720	—	I	—	—
—	3/8-16	7,938	.3125	5/16	—	—	—
—	3/8-24	8,433	.3320	—	Q	—	—
M10 x 1,50	—	8,500	.3346	—	—	GT805006	GT705006
—	7/16-14	9,093	.3580	—	T	—	—
—	7/16-20	9,921	.3906	25/64	—	—	—
M12 x 1,75	—	10,200	.4016	—	—	GT805007	GT705007
—	1/2-13	10,716	.4219	27/64	—	—	—
—	1/2-20	11,509	.4531	29/64	—	—	—
M14 x 2,00	—	12,000	.4724	—	—	—	—
—	5/8-11	13,495	.5313	17/32	—	—	—
M16 x 2,00	—	14,000	.5512	—	—	GT805008	GT705008
M18 x 2,50	—	15,500	.6102	—	—	—	—
—	3/4-10	16,670	.6563	21/32	—	—	—
M20 x 2,50	—	17,500	.6890	—	—	GT805009	—
M22 x 2,50	—	19,500	.7677	—	—	—	—

Aluminium • Forming Taps • Selector

		N	
		Forming Taps	
typical thread sizes		required tap drill diameter	
cutting taps			
metric	mm	inch	
M3 x 0,50	2,800	.1102	GT225001
M4 x 0,70	3,734	.1470	GT225002
M5 x 0,80	4,700	.1850	GT225003
M6 x 1,00	5,600	.2205	GT225004
M8 x 1,25	7,400	.2913	GT225005
M8 x 1,00	7,600	.2992	GT225009
M10 x 1,50	9,400	.3701	GT225006
M10 x 1,25	9,500	.3740	GT225011
M10 x 1,00	9,500	.3740	GT225010
M12 x 1,75	11,300	.4449	GT225007
M12 x 1,50	11,300	.4449	GT225013
M12 x 1,25	11,500	.4528	GT225012
M14 x 1,50	13,400	.5276	GT225014
M16 x 2,00	15,200	.5984	GT225008
M16 x 1,50	15,400	.6063	GT225015

N			All Materials	
HSS-E-PM Taps (Cast <12%)		Recommended SC Drill	Alternate Tap Drill	
 DIN 371, 374, 376 blind and through hole GT40_GP6520		 approximately 3 x D with coolant 259/659	 approximately 3 x D with coolant VDS401A WU25PD	
	blind and through hole with coolant GT41_GP6520		approximately 5 x D with coolant VDS402A WU25PD	
GT405001	GT415001	TCM25903300	VDS401A02500	VDS402A02500
—	—	—	VDS401A03300	VDS402A03300
—	—	—	VDS401A03734	VDS402A03734
—	—	—	VDS401A04039	VDS402A04039
GT405002	GT415002	TCM25904200	VDS401A04200	VDS402A04200
GT405003	GT415003	TCM25905000	VDS401A05000	VDS402A05000
—	—	TCM25905100	VDS401A05106	VDS402A05106
—	—	TCM25905400	VDS401A05410	VDS402A05410
—	—	TCM25906500	VDS401A06528	VDS402A06528
GT405004	GT415004	TCM25906700	VDS411A06700	VDS412A06700
—	—	TCM25906900	VDS411A06906	VDS412A06906
—	—	TCM65908000	VDS411A07938	VDS412A07938
—	—	—	VDS411A08433	VDS412A08433
GT405005	GT415005	TCM25908500	VDS411A08500	VDS412A08500
—	—	TCM25909100	VDS411A09093	VDS412A09093
—	—	TCM25909900	VDS411A09921	VDS412A09921
GT405006	GT415006	TCM25910200	VDS411A10200	VDS412A10200
—	—	TCM65910500	VDS411A10716	VDS412A10716
—	—	TCM65911500	VDS411A11509	VDS412A11509
GT405007	GT415007	TCM25912000	VDS411A12000	VDS412A12000
—	—	TCM25913500	VDS411A13495	VDS412A13495
GT405008	GT415008	TCM25914000	VDS411A14000	VDS412A14000
GT405009	GT415009	TCM25915500	VDS411A15500	VDS412A15500
—	—	—	VDS411A16670	VDS412A16670
GT405010	GT415010	TCM25917500	VDS411A17500	VDS412A17500
GT405011	—	TCM25919500	VDS411A19500	VDS412A19500

N		All Materials	
Recommended SC Drill		Alternate Tap Drill	
 approximately 5 x D with coolant 259/659		 approximately 3 x D with coolant VDS401A WU25PD	
		approximately 5 x D with coolant VDS401A WU25PD	
—	—	VDS401A02800	VDS402A02800
—	—	VDS401A03734	VDS402A03734
TCM25904700	TCM25905600	VDS401A04700	VDS402A04700
TCM25907400	TCM25907600	VDS401A05600	VDS402A05600
TCM25909400	TCM25909500	VDS411A07400	VDS412A07400
TCM25909500	TCM25909500	VDS411A07600	VDS412A07600
TCM25911300	TCM25911300	VDS411A09400	VDS412A09400
TCM25911300	TCM25911300	VDS411A09500	VDS412A09500
TCM25911500	TCM25911500	VDS411A09500	VDS412A09500
—	—	VDS411A11300	VDS412A11300
—	—	VDS411A11300	VDS412A11300
—	—	VDS411A11500	VDS412A11500
—	—	VDS411A13400	VDS412A13400
—	—	VDS411A15200	VDS412A15200
—	—	VDS411A15400	VDS412A15400

High-Temperature Alloys

			S		
			HSS-E-PM Taps — Titanium Alloys		HSS-E-PM Taps — Nickel and Cobalt Alloys
			 		
			DIN 371, 374, 376		DIN 371, 374, 376
typical thread sizes	required tap drill diameter		blind hole GT16_WN35MG	through hole GT14_WN35MG	blind hole GT12_WS32MG
	metric	mm inch			
M3 x 0,50	2,500	.0984	GT165001	GT145001	GT125001
M4 x 0,70	3,300	.1299	GT165002	GT145002	GT125002
M5 x 0,80	4,200	.1654	GT165003	GT145003	GT125003
M6 x 1,00	5,000	.1969	GT165004	GT145004	GT125004
M8 x 1,25	6,700	.2638	GT165005	GT145005	GT125005
M10 x 1,50	8,500	.3346	GT165006	GT145006	GT125006
M12 x 1,75	10,200	.4016	GT165007	GT145007	GT125007
M14 x 2,00	12,000	.4724	—	—	GT125008
M16 x 2,00	14,000	.5512	—	—	GT125009
M20 x 2,50	17,500	.6890	—	—	GT125010

Hard Material

			H	
			HSS-E-PM Taps — 44–55 HRC	HSS-E-PM Taps — 55–63 HRC
				
			DIN 371, 374, 376	
typical thread sizes	required tap drill diameter		blind and through hole GT06_WS32MG	blind and through hole GX10_WH16PG
	metric	mm inch		
M3 x 0,50	2,500	.0984	—	GX105001
M4 x 0,70	3,300	.1299	—	GX105002
M5 x 0,80	4,200	.1654	—	GX105003
M6 x 1,00	5,000	.1969	GT065003	GX105004
M8 x 1,25	6,700	.2638	GT065001	GX105005
M8 x 1,00	7,000	.2756	GT065006	GX105009
M10 x 1,50	8,500	.3346	GT065002	GX105007
M10 x 1,00	9,000	.3543	GT065007	GX105010
M12 x 1,75	10,200	.4016	GT065004	GX105007
M12 x 1,50	10,500	.4134	GT065008	GX105011
M14 x 2,00	12,000	.4724	—	GX105008
M14 x 1,50	12,500	.4921	GT065009	GX105012
M16 x 2,00	14,000	.5512	GT065005	—
M16 x 1,50	14,500	.5709	GT065010	GX105013

	S		All Materials	
HSS-E-PM Taps — Nickel and Cobalt Alloys	Recommended SC Drill		Alternate Tap Drill	
 DIN 371, 374, 376 through hole GT10_WS32MG	 approximately 3 x D with coolant WD 412522	 approximately 5 x D with coolant WD 412527	 approximately 3 x D with coolant TDS+	 approximately 5 x D with coolant TDS+5
GT105001	—	—	VDS401A02500	VDS402A02500
GT105002	412522-000330	412527-000330	17050103300	17050203300
GT105003	412522-000420	412527-000420	17050104200	17050204200
GT105004	412522-000500	412527-000500	17050105000	17050205000
GT105005	412522-000670	412527-000670	17050106700	17050206700
GT105006	412522-000850	412527-000850	17050108500	17050208500
GT105007	412522-001020	412527-001020	17050110200	17050210200
GT105008	412522-001200	412527-001200	17050112000	17050212000
GT105009	412522-001400	412527-001400	17050114000	17050214000
GT105010	412522-001750	412527-001750	17050117500	17050217500

	H		All Materials	
	Recommended SC Drill		Alternative Tap Drill	
	 approximately 3 x D with coolant WIDIA-Hanita™ M155	 approximately 5 x D with coolant WIDIA-Hanita™ M155	 approximately 3 x D with coolant TDS+	 approximately 5 x D with coolant TDS+
			—	—
			—	—
			17050104200	17050204200
			17050105000	17050205000
			17050106700	17050206700
			17050107000	17050207000
			17050108500	17050208500
			17050109000	17050209000
			17050110200	17050210200
			17050110500	17050210500
			17050112000	17050212000
			17050112500	17050212500
			17050114000	17050214000
			17050114500	17050214500

Steel • Selector

typical thread sizes	required tap drill diameter	
cutting taps metric	mm	inch
M24 x 3,00	21,000	.8268
M30 x 3,50	26,500	1.0433
M33 x 3,50	29,500	1.1614
M36 x 4,00	32,000	1.2598
M42 x 4,50	37,500	1.4764

P		
HSS-E-PM Taps		
		
blind hole GT30_GP6520	blind hole GT50_GP6520	through hole GT20_GP6520
GT305161	GT505001	GT505111
GT305163	GT505002	GT505113
GT305164	GT505003	GT505114
GT305166	GT505004	GT505116
GT305168	GT505005	GT505118


Steel • Extra Long • Selector

typical thread sizes	required tap drill diameter	
cutting taps metric	mm	inch
M24 x 3,00	21,000	.8268
M30 x 3,50	26,500	1.0433
M33 x 3,50	29,500	1.1614
M36 x 4,00	32,000	1.2598
M42 x 4,50	37,500	1.4764

P		
HSS-E-PM Taps		
		
blind hole GT30_GP6520	blind hole GT50_GP6520	through hole GT20_GP6520
GT305151	GT505006	GT205122
GT305153	GT505007	GT205124
GT305154	GT505008	GT205125
GT305156	GT505009	GT205127
GT305158	GT505010	GT205129

Cast Iron • Selector

typical thread sizes	required tap drill diameter	
cutting taps metric	mm	inch
M24 x 3,00	21,000	.8268
M30 x 3,50	26,500	1.0433
M33 x 3,50	29,500	1.1614
M36 x 4,00	32,000	1.2598
M42 x 4,50	37,500	1.4764

K		
HSS-E-PM Taps		
		
blind hole GT30_GP6520	blind hole GT50_GP6520	through hole GT20_GP6520
GT305161	GT505001	GT505111
GT305163	GT505002	GT505113
GT305164	GT505003	GT505114
GT305166	GT505004	GT505116
GT305168	GT505005	GT505118

Cast Iron • Extra Long • Selector

typical thread sizes	required tap drill diameter	
cutting taps metric	mm	inch
M24 x 3,00	21,000	.8268
M30 x 3,50	26,500	1.0433
M33 x 3,50	29,500	1.1614
M36 x 4,00	32,000	1.2598
M42 x 4,50	37,500	1.4764

K		
HSS-E-PM Taps		
		
blind hole GT30_GP6520	blind hole GT50_GP6520	through hole GT20_GP6520
GT305151	GT505006	GT205122
GT305153	GT505007	GT205124
GT305154	GT505008	GT205125
GT305156	GT505009	GT205127
GT305158	GT505010	GT205129

P HSS-E-PM Taps		P Recommended Modular Drill	
			
blind hole with coolant GT31_GP6520	blind hole with coolant GT51_GP6520	insert	tool body 3 x D
GT315025	GT515001	TDM2100UPM	TDM210R3SCF25M
GT315027	GT515002	Top Cut Plus™ TN7015/XOMT-34 or WIDIA-Metcut™ Spade Blade Program	
GT315028	GT515003		
GT315030	GT515004		
GT315032	GT515005		

P HSS-E-PM Taps		P Recommended Modular Drill	
			
blind hole with coolant GT31_GP6520	blind hole with coolant GT51_GP6520	insert	tool body 3 x D
GT315014	GT515006	TDM2100UPM	TDM210R3SCF25M
GT315016	GT515007	Top Cut Plus™ TN7015/XOMT-34 or WIDIA-Metcut™ Spade Blade Program	
GT315017	GT515008		
GT315019	GT515009		
GT315021	GT515010		

K HSS-E-PM Taps		K Recommended Modular Drill	
			
blind hole with coolant GT31_GP6520	blind hole with coolant GT51_GP6520	insert	tool body 3 x D
GT315025	GT515001	TDM2100UPM	TDM210R3SCF25M
GT315027	GT515002	Top Cut Plus™ TN5515/XOMT-35 or WIDIA-Metcut™ Spade Blade Program	
GT315028	GT515003		
GT315030	GT515004		
GT315032	GT515005		

K HSS-E-PM Taps		K Recommended Modular Drill	
			
blind hole with coolant GT31_GP6520	blind hole with coolant GT51_GP6520	insert	tool body 3 x D
GT315014	GT515006	TDM2100UPM	TDM210R3SCF25M
GT315016	GT515007	Top Cut Plus™ TN5515/XOMT-35 or WIDIA-Metcut™ Spade Blade Program	
GT315017	GT515008		
GT315019	GT515009		
GT315021	GT515010		


High-Performance Solid Carbide Taps • **WIDIA-GTD™**

Solid carbide taps for high productivity and outstanding performance in a wide range of workpiece materials.



Solid Carbide Taps

- High performance to surpass competitive taps.
- More production from a single tool.
- Available in various specifications.

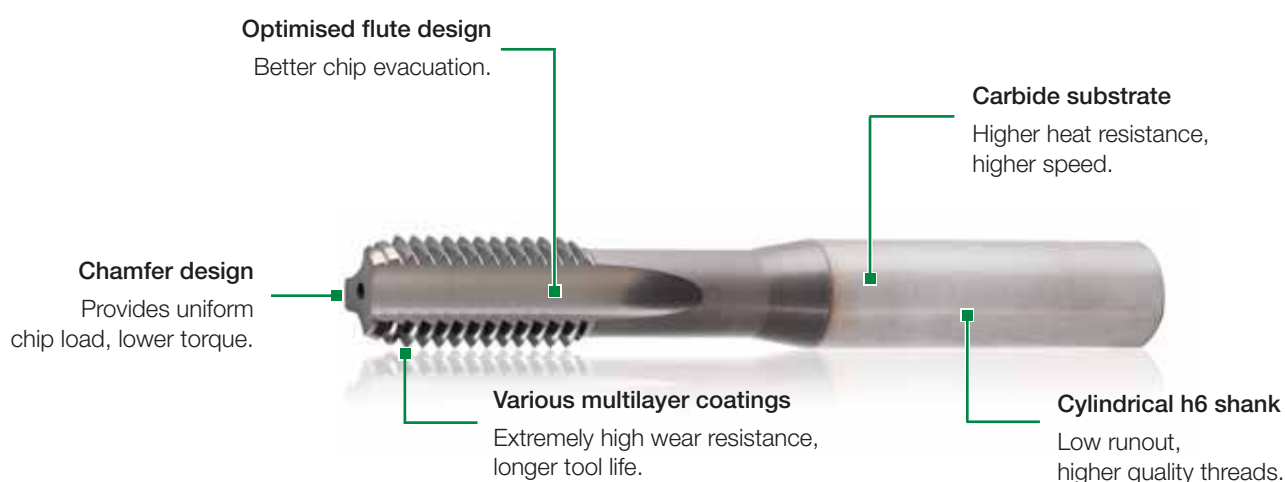

Advanced WIDIA™ Technology

- Manufactured with fine-grain micrograin carbide for exceptional wear life.
- Ideal for long production runs where fewer tool changes mean greater productivity.
- Designed for outstanding tool life in steel, cast iron, aluminium, and hardened materials.

Features

- Runs 4x faster and lasts 4x longer than conventional taps.
- Enhanced tap precision and design.
- Tap runout less than 10 microns (.0004").
- PVD coatings tailored to specific applications.
- Custom solutions available upon request.

Benefits

- Superior accuracy of product thread.
- Excellent thread quality and tap performance.
- High edge strength and wear resistance.
- Maximum chip control.
- Can be factory reconditioned to original specifications and tolerances.

Application Information

- For use on CNC machines with synchronous or rigid tapping control and precision toolholders.
- Use with machining centres equipped with precise and rigid hydraulic, Shrink Fit, or precision collet toolholders.




High-Performance Taps

Victory™ Solid Carbide Left-Hand Spiral Flute Taps • Through Holes



- GP4535 TiAlN + TiN for steel

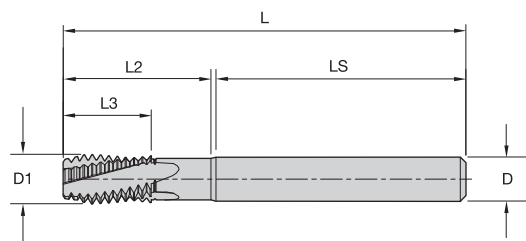


VICTORY

- first choice
- alternate choice

Shank Tolerance	
D	tolerance h6
6	+0, -0,008
8-10	+0, -0,009
12-16	+0, -0,011


■ GX32 • Form D Plug Chamfer • Metric



GP4535	D1 size	metric dimensions					number of flutes	class of fit
		L	L3	L2	LS	D		
12225	M6 X 1	70	12	23	43	6,0	3	6HX
12226	M8 X 1,25	80	15	28	47	8,0	3	6HX
12227	M10 X 1,5	90	18	33	51	10,0	4	6HX
12228	M12 X 1,75	100	21	40	54	12,0	4	6HX
12229	M14 X 2	110	24	47	61	12,0	4	6HX
12230	M16 X 2	110	24	53	55	14,0	4	6HX

NOTE: Proprietary technology.


- GP4535 TiAlN + TiN for steel

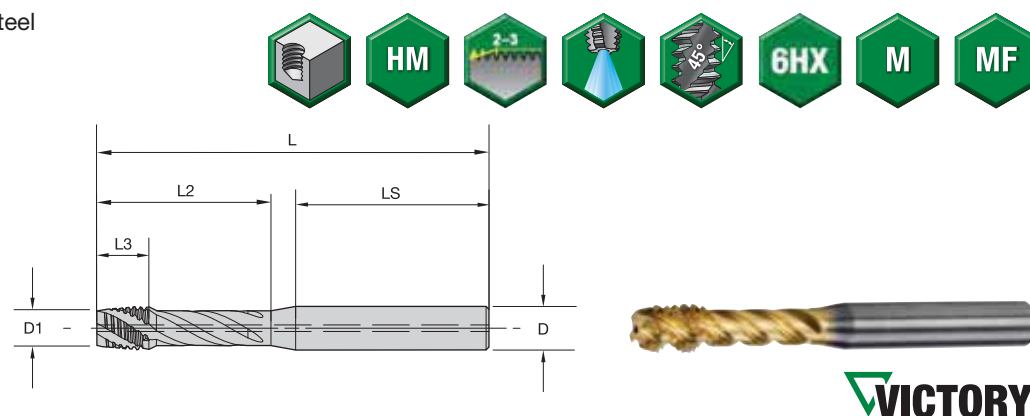

- first choice
- alternate choice

Shank Tolerance	
D	tolerance h6
6	+0, -0,008
8-10	+0, -0,009
12-16	+0, -0,011

■ GX33 • Form C Semi-Bottoming Chamfer • Through Coolant • Metric



GP4535	D1 size	metric dimensions					number of flutes	class of fit
		L	L3	L2	LS	D		
12781	M6 X 1	70	8	24	42	6,0	3	6HX
12782	M8 X 1,25	80	10	32	43	8,0	3	6HX
12784	M10 X 1	90	12	40	44	10,0	4	6HX
12783	M10 X 1,5	90	12	40	44	10,0	4	6HX
12786	M12 X 1,5	100	14	48	46	12,0	4	6HX
12785	M12 X 1,75	100	14	48	46	12,0	4	6HX
12788	M14 X 1,5	110	16	56	52	12,0	4	6HX
12787	M14 X 2	110	16	56	52	12,0	4	6HX
12789	M16 X 2	110	16	64	44	14,0	4	6HX


NOTE: Proprietary technology.

High-Performance Taps

Victory™ Solid Carbide Straight Flute Taps • Blind Holes




- GP4535 TiAlN + TiN for cast iron

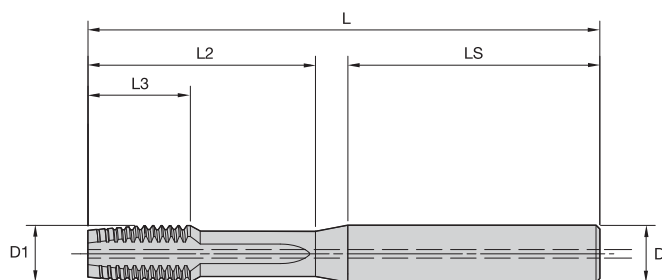

- first choice
- alternate choice

Shank Tolerance	
D	tolerance h6
6	+0, -0,008
8-10	+0, -0,009
12-16	+0, -0,011


■ GX35 • Form E Bottoming Chamfer • Through Coolant M6 and Larger • Metric



GP4535	D1 size	metric dimensions					number of flutes	class of fit
		L	L3	L2	LS	D		
12731	M4 X 0,7	60	6	16	36	6,0	3	6HX
12732	M5 X 0,8	60	7	20	34	6,0	3	6HX
12733	M6 X 1	70	12	23	43	6,0	4	6HX
12734	M8 X 1,25	80	15	28	47	8,0	4	6HX
12736	M10 X 1	90	18	33	51	10,0	4	6HX
12735	M10 X 1,5	90	18	33	51	10,0	4	6HX
12738	M12 X 1,5	100	21	40	54	12,0	4	6HX
12737	M12 X 1,75	100	21	40	54	12,0	4	6HX
12740	M14 X 1,5	110	24	47	61	12,0	4	6HX
12739	M14 X 2	110	24	47	61	12,0	4	6HX
12741	M16 X 2	110	24	53	55	14,0	4	6HX

NOTE: Proprietary technology.

- GP4535 TiAlN + TiN for steel

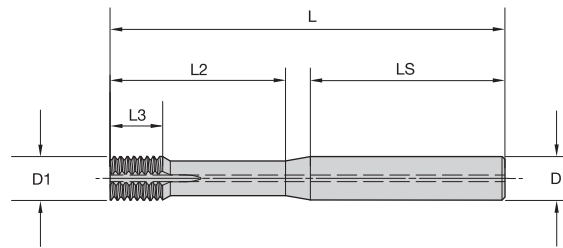


High-Performance Taps

- first choice
- alternate choice

Shank Tolerance	
D	tolerance h6
6	+0, -0,008
8-10	+0, -0,009
12-16	+0, -0,011

■ GX39 • Form E Bottoming Entry Taper • Through Coolant M6 and Larger • Metric



GP4535	D1 size	metric dimensions					number of lube grooves	class of fit
		L	L3	L2	LS	D		
12826	M4 X 0,7	60	6	16	36	6,0	2	6HX
12827	M5 X 0,8	60	7	20	34	6,0	2	6HX
12828	M6 X 1	70	8	24	42	6,0	2	6HX
12829	M8 X 1,25	80	10	32	43	8,0	2	6HX
12830	M10 X 1,5	90	12	40	44	10,0	3	6HX


NOTE: Proprietary technology.
Form taps require a larger drilled hole size prior to tapping than corresponding cutting taps.

High-Performance Taps

Victory™ Solid Carbide Forming Taps • Blind Holes



- GN1515 TiN + CrC/C for aluminium

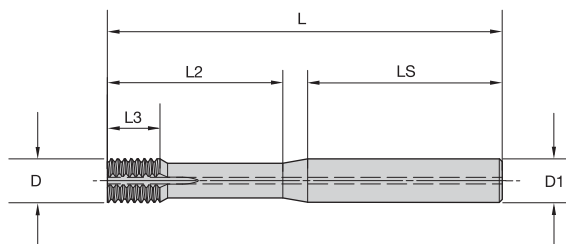


VICTORY

- first choice
- alternate choice

Shank Tolerance	
D	tolerance h6
6	+0, -0,008
8-10	+0, -0,009
12-16	+0, -0,011

■ GX49 • Form E Bottoming Entry Taper • Through Coolant M6 and Larger • Metric




GN1515	D1 size	metric dimensions					number of lube grooves	class of fit
		L	L3	L2	LS	D		
12906	M4 X 0,7	60	6	16	36	6,0	2	6HX
12907	M5 X 0,8	60	7	20	34	6,0	2	6HX
12908	M6 X 1	70	8	24	42	6,0	2	6HX
12909	M8 X 1,25	80	10	32	43	8,0	2	6HX
12912	M10 X 1	90	12	40	44	10,0	3	6HX
12911	M10 X 1,5	90	12	40	44	10,0	3	6HX
12915	M12 X 1,5	100	14	48	46	12,0	3	6HX
12914	M12 X 1,75	100	14	48	46	12,0	3	6HX

NOTE: Proprietary technology.

Form taps require a larger drilled hole size prior to tapping than corresponding cutting taps.

- WH16PG TiAlN/MoS₂ for steel 55–63 HRC

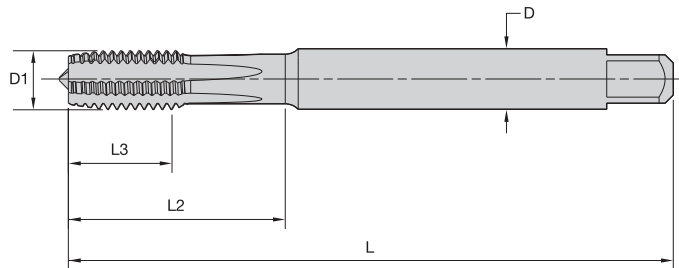
VICTORY


High-Performance Taps

- first choice
- alternate choice

Shank Tolerance

D	tolerance h9
1–3	+0, -0,025
3,5–6	+0, -0,030
7–10	+0, -0,036
11–18	+0, -0,043

■ GX10 • Form C Semi-Bottoming Chamfer • Metric DIN 371, 374, and 376



		metric dimensions						
WH16PG	D1 size	L	L3	L2	D	number of flutes	dimension standard	class of fit
GX105001	M3 X 0,5	63	6	18	4,5	4	DIN 371	6HX
GX105002	M4 X 0,7	63	8	20	4,5	4	DIN 371	6HX
GX105003	M5 X 0,8	70	10	26	6,0	4	DIN 371	6HX
GX105004	M6 X 1	80	12	28	6,0	4	DIN 371	6HX
GX105009	M8 X 1	90	15	35	8,0	5	DIN 374	6HX
GX105005	M8 X 1,25	90	15	35	8,0	5	DIN 371	6HX
GX105010	M10 X 1	100	18	38	10,0	5	DIN 374	6HX
GX105006	M10 X 1,5	100	18	38	10,0	5	DIN 371	6HX
GX105011	M12 X 1,5	110	21	41	12,0	5	DIN 374	6HX
GX105007	M12 X 1,75	110	21	41	12,0	5	DIN 376	6HX
GX105012	M14 X 1,5	110	24	44	14,0	5	DIN 374	6HX
GX105008	M14 X 2	110	24	44	14,0	6	DIN 376	6HX
GX105013	M16 X 1,5	110	24	44	16,0	5	DIN 374	6HX

■ Carbide Taps • Metric

Material Group		 Through Holes					 Blind Holes				
				Range — m/min					Range — m/min		
		Tap Style	Grade	min	Starting Value	max	Tap Style	Grade	min	Starting Value	max
P	1	GX32, GX38	GP4535	80	100	130	GX33, GX39	GP4535	50	70	90
	2	GX32, GX38	GP4535	70	90	120	GX33, GX39	GP4535	50	60	80
	3, 4, 6, 7	GX32, GX38	GP4535	60	80	100	GX33, GX39	GP4535	50	60	80
K	15, 16	GX34	GP4535	80	105	140	GX35	GP4535	50	70	90
	17, 18, 19	GX34	GP4535	80	100	130	GX35	GP4535	50	70	90
	20	GX34	GP4535	70	90	120	GX35	GP4535	50	60	80
N	21	GX46, GX48	GN1515	90	120	160	GX47, GX49	GN1515	60	80	100
	22, 23, 24	GX46, GX48	GN1515	80	100	130	GX47, GX49	GN1515	50	70	90
	25	GX46, GX48	GN1515	70	85	110	GX47, GX49	GN1515	50	60	80
H	39.1, 41.2	GX10	WH16PG	1,2	1,5	2,0	GX10	WH16PG	0,8	1,1	1,4
	39.1	GX10	WH16PG	0.6	0.8	1.0	GX10	WH16PG	0.4	0.5	0.7

WIN WITH WIDIATM



Solid Carbide Thread Mills

Features:

- Helical carbide thread mills with PVD TiAlN coating.
- One tool for right- or left-hand threads for both internal and external threading applications.
- For fine or coarse pitch threads.

Benefits:

- Excellent resistance to wear and shock loading.
- Ensures accurate thread form alignment.
- Machines all materials.
- Produce threads in materials up to 62 Rc.

To learn more about our innovations, contact your local Authorised Distributor or visit www.widia.com.

WIDIA 

Steel

			P		
typical thread sizes		required tap drill diameter	Solid Carbide Taps		Solid Carbide Forming Taps
cutting taps metric	forming taps metric	mm	 blind hole with coolant GX33_GP4535	 through hole GX32_GP4535	 forming blind hole with coolant GX39_GP4535
—	—	3,175	—	—	12801
M4,5 x 0,75	M4 x 0,70	3,700	—	—	12826
—	—	3,797	—	—	12802
—	—	4,366	—	—	12803
—	—	4,496	—	—	12804
—	M5 x 0,80	4,700	—	—	12827
M6 x 1,00	—	5,000	12781	12225	—
—	M6 x 1,00	5,600	—	—	12828
—	—	5,791	—	—	12805
—	—	5,944	—	—	12806
M8 x 1,25	—	6,700	12782	12226	—
—	—	6,909	—	12203	—
—	—	7,366	—	—	12807
—	M8 x 1,25	7,400	—	—	12829
—	—	8,433	—	12205	—
M10 x 1,50	—	8,500	12783	12227	—
M10 x 1,00	—	9,000	12784	—	—
—	—	8,839	—	—	12808
—	M10 x 1,50	9,400	—	—	12830
M12 x 1,75	—	10,200	12785	12228	—
M12 x 1,50	—	10,500	12786	—	—
—	—	10,716	12766	12207	—
—	—	11,509	—	12208	—
M14 x 2,00	—	12,000	12787	12229	—
M14 x 1,50	—	12,500	12788	—	—
M16 x 2,00	—	14,000	12789	12230	—

P	P	All Materials
Solid Carbide Forming Taps	Recommended SC Drill	Alternate Tap Drill
 forming through hole with coolant GX38_GP4535	 approximately 5 x D with coolant TDS402 WP20PD	 approximately 5 x D with coolant VDS402A WU25PD
	 approximately 5 x D non-coolant TDS202 WP20PD	 approximately 5 x D non-coolant VDS202A WU25PD
12809	TDS402A03175	TDS202A03175
12831	TDS402A03700	TDS202A03700
12810	TDS402A03797	TDS202A03797
12811	TDS402A04219	TDS202A04219
12812	TDS402A04496	TDS202A04496
12832	TDS402A04700	TDS202A04700
—	TDS402A05000	TDS202A05000
12833	TDS402A05600	TDS202A05600
12813	TDS402A05791	TDS202A05791
12814	TDS402A05944	TDS202A05944
—	TDS402A06700	TDS202A06700
—	TDS402A06906	TDS202A06906
12815	TDS402A07366	TDS202A07366
12834	TDS402A07400	TDS202A07400
—	TDS402A08433	TDS202A08433
—	TDS402A08500	TDS202A08500
—	TDS402A09000	TDS202A09000
12816	TDS402A08839	TDS202A08839
12835	TDS402A09400	TDS202A09400
—	TDS402A10200	TDS202A10200
—	TDS402A10500	TDS202A10500
—	TDS402A10716	TDS202A10716
—	TDS402A11509	TDS202A11509
—	TDS402A12000	TDS202A12000
—	TDS402A12500	TDS202A12500
—	TDS402A14000	TDS202A14000


Cast Iron

		K		
		Solid Carbide Taps		Recommended SC Drill
typical thread sizes	required tap drill diameter	 		
cutting taps metric	mm	blind hole with coolant GX35 GP4535	through hole GX34 GP4535	approximately 3 x D with coolant TDS411 WK15PD
—	2,705	12700	12713	TDS401A02705
M4 x 0,70	3,300	12731	12742	TDS401A03300
—	3,454	12701	12714	TDS401A03454
—	3,734	12702	12715	TDS401A03734
—	4,039	12703	12716	TDS401A04039
M5 x 0,80	4,200	12732	12743	TDS401A04200
M6 x 1,00	5,000	12733	12744	TDS401A05000
—	5,106	12704	12717	TDS401A05106
—	5,410	12705	12718	TDS401A05410
—	6,528	12706	12719	TDS401A06528
M8 x 1,25	6,700	12734	12745	TDS411A06700
—	7,938	12707	12404	TDS411A07938
—	8,433	—	12405	TDS411A08433
M10 x 1,50	8,500	12735	12427	TDS411A08500
M10 x 1,00	9,000	12736	12746	TDS411A09000
—	9,093	12708	12406	TDS411A09093
M12 x 1,75	10,200	12737	12428	TDS411A10200
M12 x 1,50	10,500	12738	12747	TDS411A10500
—	10,716	12709	12407	TDS411A10716
—	11,509	—	12408	TDS411A11509
M14 x 2,00	12,000	12739	12429	TDS411A12000
—	12,304	12710	12409	TDS411A12304
M14 x 1,50	12,500	12740	12748	TDS411A12500
—	13,495	12711	12410	TDS411A13495
M16 x 2,00	14,000	12741	12430	TDS411A14000
M18 x 2,50	15,500	—	12431	TDS411A15500
—	16,670	12712	12411	TDS411A16670
M20 x 2,50	17,500	—	12432	TDS411A17500

K		All Materials	
Recommended SC Drill		Alternate Tap Drill	
			
approximately 5 x D with coolant TDS412 WK15PD	approximately 5 x D non-coolant TDS212 WK15PD	approximately 5 x D with coolant VDS402A WU25PD	approximately 5 x D non-coolant VDS202A WU25PD
TDS402A02705	TDS212A02705	VDS402A02705	VDS202A02705
TDS402A03300	TDS212A03300	VDS402A03300	VDS202A03300
TDS402A03454	TDS212A03454	VDS402A03454	VDS202A03454
TDS402A03734	TDS212A03734	VDS402A03734	VDS202A03734
TDS402A04039	TDS212A04039	VDS402A04039	VDS202A04039
TDS402A04200	TDS212A04200	VDS402A04200	VDS202A04200
TDS402A05000	TDS212A05000	VDS402A05000	VDS202A05000
TDS402A05106	TDS212A05106	VDS402A05106	VDS202A05106
TDS402A05410	TDS212A05410	VDS402A05410	VDS202A05410
TDS402A06528	TDS212A06528	VDS402A06528	VDS202A06528
TDS412A06700	TDS212A06700	VDS412A06700	VDS212A06700
TDS412A07938	TDS212A07938	VDS412A07938	VDS212A07938
TDS412A08433	TDS212A08433	VDS412A08433	VDS212A08433
TDS412A08500	TDS212A08500	VDS412A08500	VDS212A08500
TDS412A09000	TDS212A09000	VDS412A09000	VDS212A09000
TDS412A09093	TDS212A09093	VDS412A09093	VDS212A09093
TDS412A10200	TDS212A10200	VDS412A10200	VDS212A10200
TDS412A10500	TDS212A10500	VDS412A10500	VDS212A10500
TDS412A10716	TDS212A10716	VDS412A10716	VDS212A10716
TDS412A11509	TDS212A11509	VDS412A11509	VDS212A11509
TDS412A12000	TDS212A12000	VDS412A12000	VDS212A12000
TDS412A12304	TDS212A12304	VDS412A12304	VDS212A12304
TDS412A12500	TDS212A12500	VDS412A12500	VDS212A12500
TDS412A13495	TDS212A13495	VDS412A13495	VDS212A13495
TDS412A14000	TDS212A14000	VDS412A14000	VDS212A14000
TDS412A15500	TDS212A15500	VDS412A15500	VDS212A15500
TDS412A16670	TDS212A16670	VDS412A16670	VDS212A16670
TDS412A17500	TDS212A17500	VDS412A17500	VDS212A17500

Aluminium

			N		
typical thread sizes		required tap drill diameter	Solid Carbide Taps		Solid Carbide Forming Taps
cutting taps metric	forming taps metric	mm	 blind hole with coolant GX47_GN1515	 through hole with coolant GX46_GN1515	 forming blind hole with coolant GX49_GN1515
—	—	3,175	—	—	12895
M4,5 x 0,75	M4 x 0,70	3,700	—	—	12906
—	—	3,797	—	—	12896
—	—	4,366	—	—	12897
12-24	—	4,496	—	—	12898
—	M5 x 0,80	4,700	—	—	12907
M6 x 1,00	—	5,000	12866	12846	—
—	—	5,106	12858	12836	—
—	—	5,410	12859	12838	—
—	M6 x 1,00	5,600	—	—	12908
—	—	5,791	—	—	12899
—	—	5,944	—	—	12901
—	—	6,528	12860	12839	—
M8 x 1,25	—	6,700	12867	12847	—
—	—	7,366	—	—	12902
—	M8 x 1,25	7,400	—	—	12909
—	—	7,938	12861	12840	—
M10 x 1,50	—	8,500	12868	12848	—
M10 x 1,00	—	9,000	12869	12850	—
—	—	8,839	—	—	12903
7/16-14	—	9,093	12862	12841	—
—	M10 x 1,50	9,400	—	—	12911
M12 x 1,75	—	10,200	12870	12851	—
M12 x 1,50	—	10,500	12872	12852	—
—	—	10,716	12863	12843	—
M14 x 2,00	—	12,000	12873	12853	—
—	—	12,304	12864	12844	—
M14 x 1,50	—	12,500	12874	12854	—
—	—	13,495	12865	12845	—
M16 x 2,00	—	14,000	12875	12855	—
M16 x 1,50	—	14,500	12876	12856	—

Solid Carbide Forming Taps	N		All Materials	
	Recommended SC Drill		Alternate Tap Drill	
 forming through hole with coolant GX48_GN1515	 approximately 3 x D with coolant WD 412522	 approximately 5 x D with coolant WD 412527	 approximately 5 x D with coolant VDS402A_WU25PD	 approximately 5 x D non-coolant VDS202A_WU25PD
12877	TCM65903000	012535—00318	VDS402A03175	VDS202A03175
12887	TCM25903700	—	VDS402A03700	VDS202A03700
12878	—	—	VDS402A03797	VDS202A03797
12879	—	—	VDS402A04219	VDS202A04219
12880	—	—	VDS402A04496	VDS202A04496
12888	TCM25904700	—	VDS402A04700	VDS202A04700
—	TCM25909500	012535—00500	VDS402A05000	VDS202A05000
—	—	—	VDS402A05106	VDS202A05106
—	—	—	VDS402A05410	VDS202A05410
12889	TCM25905600	—	VDS402A05600	VDS202A05600
12881	—	—	VDS402A05791	VDS202A05791
12882	—	—	VDS402A05944	VDS202A05944
—	—	—	VDS402A06528	VDS202A06528
—	TCM25906700	—	VDS412A06700	VDS212A06700
12883	—	—	VDS412A07366	VDS212A07366
12890	TCM25907400	—	VDS412A07400	VDS212A07400
—	TCM65908000	012535—00793	VDS412A07938	VDS212A07938
—	TCM25908500	012535—00850	VDS412A08500	VDS212A08500
—	TCM25909000	012535—00900	VDS412A09000	VDS212A09000
12884	—	—	VDS412A08839	VDS212A08839
—	—	—	VDS412A09093	VDS212A09093
12891	TCM25909400	—	VDS412A09400	VDS212A09400
—	TCM25910200	012535—01020	VDS412A10200	VDS212A10200
—	TCM25910500	012535—01050	VDS412A10500	VDS212A10500
—	—	012535—01072	VDS412A10716	VDS212A10716
—	TCM25912000	012535—01200	VDS412A12000	VDS212A12000
—	TCM65912100	—	VDS412A12304	VDS212A12304
—	TCM25912500	012535—01250	VDS412A12500	VDS212A12500
—	—	—	VDS412A13495	VDS212A13495
—	TCM25914000	012535—01400	VDS412A14000	VDS212A14000
—	TCM25914500	012535—01450	VDS412A14500	VDS212A14500

Thread Mills • **WIDIA-GTD™**

Available for the first time, our solid thread mills are designed to be the highest quality thread milling solution.



Thread Mills

- Cut up to 63 HRC.
- Improved overall thread quality.

Optimised flute design

Better chip evacuation.

Carbide substrate


Higher heat resistance,
higher speed.

Various multilayer coatings

Extremely high wear resistance,
longer tool life.

Cylindrical h6 shank

Low runout,
higher quality threads.

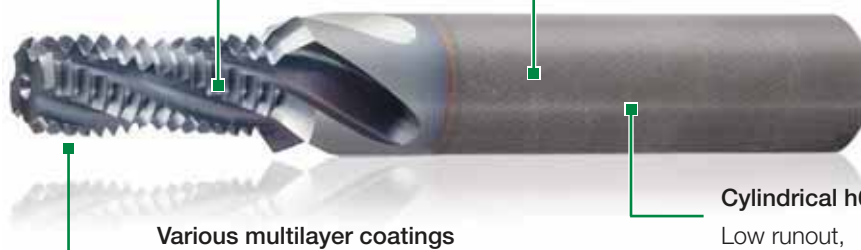

Unmatched Capabilities

- Capable of easily cutting most difficult materials.
- Carbide grades make threading easier and reduce machining times.
- High-quality internal and external threading on 3-axis CNC machines.
- Thread mills make interrupted cuts and short chips.
- Design offers a range of benefits to improve overall thread quality.
- Short, easily evacuated chips generate less heat and friction, so there is a lower risk of damage to threading.

Choose WIDIA-GTD™ Thread Mills

- Greater versatility than competitive products.
- Optimum surface quality for an excellent end product.
- Designed to eliminate chipping issues.
- No need to reverse the spindle.
- Fewer machining problems means more production safety.



Victory™ GTM Series HP Solid Carbide Thread Mills • Metric

- ★ Good
★★ Better
★★★ Best

GTM Series Solid Thread Milling • Metric	series	size range (inch and metric)	hole	operation	coolant	grade	shank
		size min - max					
	GTM11	M3 - M20				WU13PV	6535 HA
	GTM21	M5 - M16				WU12PV	6535 HA
	GTM31	M4 - M16				WU12PV	6535 HA
	GTM41	M6 - M24				WU16PV	6535 HA
	GTM41LH	M6 - M12				WU16PV	6535 HA


Victory GTM Series HP Solid Carbide Thread Mills • Inch

- ★ Good
★★ Better
★★★ Best

GTM Series Solid Thread Milling • Inch	series	size range (inch and metric)	hole	operation	coolant	grade	shank
		size min - max					
	GTM21	#10 - 5/8"				WU12PV	6535 HA
	GTM31	1/4" - 5/8"				WU12PV	6535 HA
	GTM41	1/4" - 3/4"				WU16PV	6535 HA

P				M	K		N			S				H		page	recommended cutting parameters
1, 2, 3, 4, 6, 7	5, 9, 10, 11	12, 13.1	13.2	14.1, 14.2, 14.3, 14.4	15, 16, 17, 18, 19	20	21	22, 23, 24, 25	26, 27, 28	31, 32	33, 34, 35	36	37	38.1, 38.2, 40.1, 40.2, 41.1	39.1, 41.2		
Steel <35 HRC	Steel 36-48 HRC	PH and Ferritic Stainless Steel <35 HRC	PH and Ferritic Stainless Steel >35 HRC	Stainless Steel	Cast Iron		Wrought Aluminium	Cast Aluminium	Copper, Copper Alloys	Iron Based	Cobalt Based	Nickel Based	Titanium Alloys	Hardened Steels 49-55 HRC	Hardened Steels 56-68 HRC		
★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★	★	★	★			A96	A104
★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★			A98	A104
					★★★★	★★★★	★★★★	★★★★	★★★★							A100	A104
★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★					★★★★	★★★★	A102	A105
										★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	A103	A105

P				M	K		N			S				H		page	recommended cutting parameters
1, 2, 3, 4, 6, 7	5, 9, 10, 11	12, 13.1	13.2	14.1, 14.2, 14.3, 14.4	15, 16, 17, 18, 19	20	21	22, 23, 24, 25	26, 27, 28	31, 32	33, 34, 35	36	37	38.1, 38.2, 40.1, 40.2, 41.1	39.1, 41.2		
Steel <35 HRC	Steel 36-48 HRC	PH and Ferritic Stainless Steel <35 HRC	PH and Ferritic Stainless Steel >35 HRC	Stainless Steel	Cast Iron		Wrought Aluminium	Cast Aluminium	Copper, Copper Alloys	Iron Based	Cobalt Based	Nickel Based	Titanium Alloys	Hardened Steels 49-55 HRC	Hardened Steels 56-68 HRC		
★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★			A97	A104
					★★★★	★★★★	★★★★	★★★★	★★★★							A99	A104
★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★					★★★★	★★★★	A101	A105



Coatings are designed for optimised tapping performance in specific materials.

P	Steel
M	Stainless Steel
K	Cast Iron
N	Non-Ferrous Materials
S	High-Temp Alloys
H	Hardened Materials

wear resistance ← → toughness

Coating		Grade Description		05	10	15	20	25	30	35	40	45
WU12PV		Coated carbide. PVD fine-grain carbide substrate with high-hardness TiCN coating. Universal grade for thread milling most materials.	P									
			M									
			K									
			N									
			S									
WU13PV		Coated carbide. PVD carbide substrate with heat-resistant TiAlN coating. Universal grade for thread milling most materials.	P									
			M									
			K									
			N									
			S									
WU16PV		Coated carbide. PVD two-layer coating with heat-resistant TiAlN base layer and low-friction MoS ₂ top layer over carbide substrate. Use for thread milling most materials, including high-hardness materials.	P									
			M									
			K									
			N									
			S									
			H									


WIN WITH WIDIATM



VictoryTM GX HP Solid Carbide for the Ultimate High-Performance Tapping Line

Run up to 4x faster and last up to 4x longer than conventional high-speed steel taps.

- Enhanced precision design delivers more accurately tapped holes.
- A full range of styles and grades for blind hole and through hole applications in ferrous and non-ferrous materials.
- After use, cutting taps can be factory reconditioned to original proprietary specifications and tolerances.


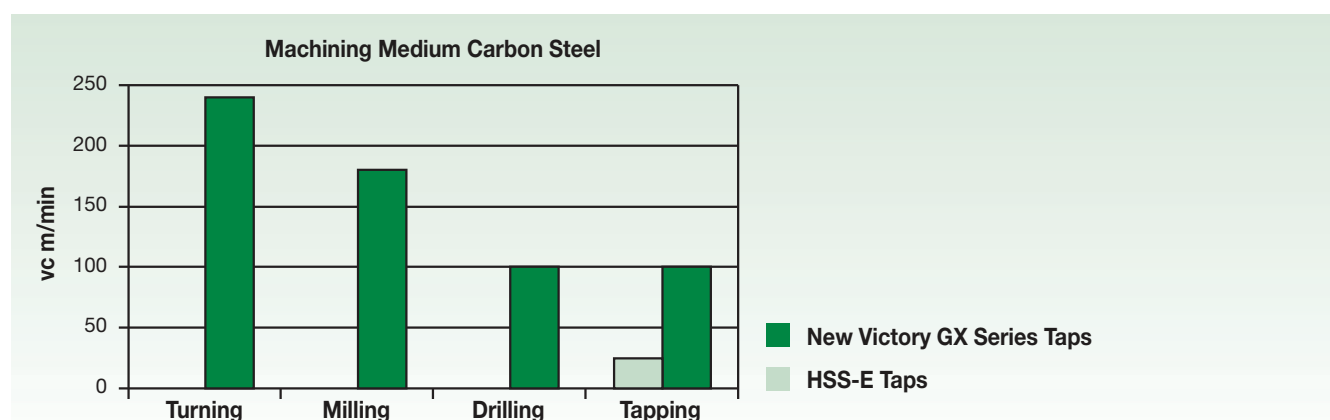


To learn more about our innovations, contact your local Authorised Distributor or visit www.widia.com.

WIDIA 

High-Performance Thread Mills

Victory™ Solid Carbide Thread Mills • Blind and Through Holes

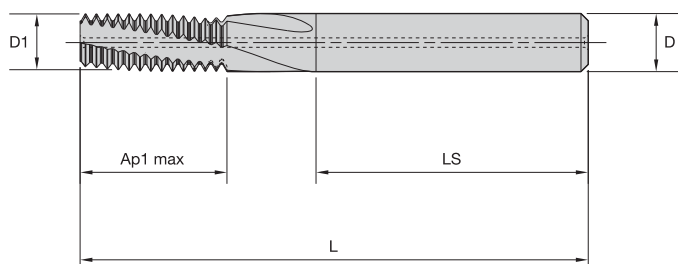


VICTORY


- first choice
- alternate choice

Shank Tolerance	
D	tolerance h6
6	+0, -0,008
8-10	+0, -0,009
12-18	+0, -0,011
20-30	+0, -0,013

■ GTM11 • Through Coolant • Metric and Metric Fine



	metric dimensions						cutting edges
	D1 size	D1	Ap1 max	L	LS	D	
WU13PV							
GTM115001	M3X0.5	2,4	6	42	28	4,0	3
GTM115012	M4X0.5	3,4	8	55	36	6,0	3
GTM115002	M4X0.7	3,2	9	55	36	6,0	3
GTM115013	M5X0.5	4,3	10	55	36	6,0	3
GTM115003	M5X0.8	4,0	11	55	36	6,0	3
GTM115014	M6X0.75	5,0	12	55	36	6,0	3
GTM115004	M6X1	4,8	12	55	36	6,0	3
GTM115015	M8X0.75	5,9	17	63	36	6,0	3
GTM115016	M8X1	5,9	16	63	36	6,0	3
GTM115005	M8X1.25	5,9	17	63	36	6,0	3
GTM115017	M10X1	7,9	20	70	36	8,0	3
GTM115006	M10X1.5	7,9	20	70	36	8,0	3
GTM115018	M12X1	9,9	24	80	40	10,0	4
GTM115019	M12X1.5	9,9	25	80	40	10,0	4
GTM115007	M12X1.75	9,9	25	80	40	10,0	4
GTM115020	M14X1.5	9,9	29	80	40	10,0	4
GTM115008	M14X2	11,6	29	90	45	12,0	4
GTM115021	M16X1.5	11,9	32	90	45	12,0	4
GTM115009	M16X2	11,9	33	90	45	12,0	4
GTM115022	M18X1.5	13,9	37	90	45	14,0	4
GTM115010	M18X2.5	13,9	39	90	45	14,0	4
GTM115023	M20X1.5	13,9	41	90	45	14,0	4
GTM115011	M20X2.5	13,9	41	90	45	14,0	4

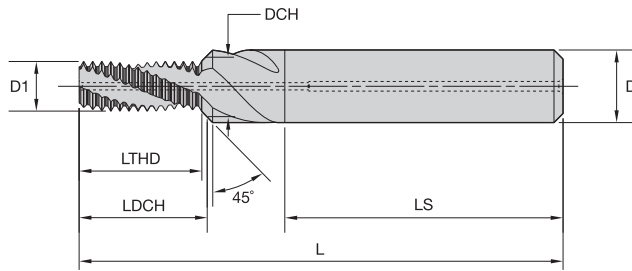


VICTORY


- first choice
- alternate choice

Shank Tolerance	
D	tolerance h6
6	+0, -0,008
8-10	+0, -0,009
12-18	+0, -0,011
20-30	+0, -0,013

■ GTM21 • Through Coolant • Inch UNC and UNF



	metric dimensions								cutting edges
	D1 TPI	D1	DCH	LTHD	LDCH	L	LS	D	
WU12PV									
GTM215024	#10-32	3,8	5,13	9,95	10,53	55	36	6,0	3
GTM215017	1/4-20	4,7	6,65	13,36	14,23	62	36	8,0	3
GTM215025	1/4-28	5,2	6,65	13,19	13,84	62	36	8,0	3
GTM215018	5/16-18	6,2	8,25	16,26	17,19	74	40	10,0	3
GTM215026	5/16-24	6,6	8,25	16,44	17,15	74	40	10,0	3
GTM215019	3/8-16	7,7	9,83	19,89	20,85	80	45	12,0	3
GTM215027	3/8-24	8,2	9,83	19,62	20,31	80	45	12,0	3
GTM215020	7/16-14	9,0	11,43	22,72	23,79	80	45	12,0	3
GTM215028	7/16-20	9,6	11,43	22,28	23,08	80	45	12,0	3
GTM215021	1/2-13	10,4	13,00	26,43	27,60	90	45	14,0	4
GTM215029	1/2-20	11,1	13,00	26,10	26,89	90	45	14,0	4
GTM215022	9/16-12	11,8	14,61	30,75	31,99	100	48	16,0	4
GTM215030	9/16-18	12,5	14,61	28,99	29,88	100	48	16,0	4
GTM215023	5/8-11	13,1	16,18	33,54	34,89	102	48	18,0	4
GTM215031	5/8-18	14,1	16,18	33,24	34,09	102	48	18,0	4

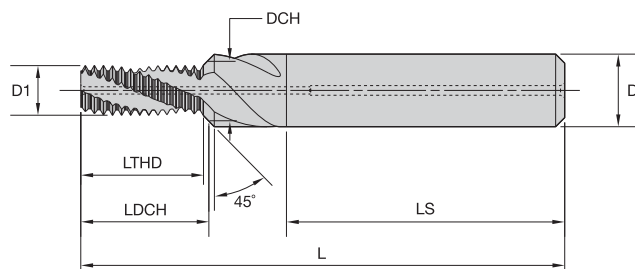


VICTORY


- first choice
- alternate choice

Shank Tolerance	
D	tolerance h6
6	+0, -0,008
8-10	+0, -0,009
12-18	+0, -0,011
20-30	+0, -0,013

■ GTM21 • Through Coolant • Metric and Metric Fine



WU12PV	metric dimensions								cutting edges
	D1 size	D1	DCH	LTHD	LDCH	L	LS	D	
GTM215001	M5X0.8	4,0	5,3	10,82	11,40	55	36	6,0	3
GTM215008	M6X0.75	5,0	6,3	12,40	12,97	62	36	8,0	3
GTM215002	M6X1	4,8	6,3	12,52	13,19	62	36	8,0	3
GTM215009	M8X1	6,7	8,3	16,53	17,23	74	40	10,0	3
GTM215003	M8X1.25	6,5	8,3	16,91	17,71	74	40	10,0	3
GTM215010	M10X1	8,7	10,3	20,55	21,23	80	45	12,0	3
GTM215011	M10X1.25	8,4	10,3	20,67	21,50	80	45	12,0	3
GTM215004	M10X1.5	8,2	10,3	20,29	21,22	80	45	12,0	3
GTM215012	M12X1	10,6	12,3	24,56	25,27	90	45	14,0	4
GTM215013	M12X1.25	10,4	12,3	24,43	25,24	90	45	14,0	4
GTM215014	M12X1.5	10,1	12,3	24,80	25,76	90	45	14,0	4
GTM215005	M12X1.75	9,9	12,3	25,42	26,48	90	45	14,0	4
GTM215015	M14X1.5	12,1	14,3	29,31	30,25	100	48	16,0	4
GTM215006	M14X2	11,6	14,3	29,05	30,24	100	48	16,0	4
GTM215016	M16X1.5	14,0	16,3	32,31	33,30	102	48	18,0	4
GTM215007	M16X2	13,6	16,3	33,05	34,24	102	48	18,0	4

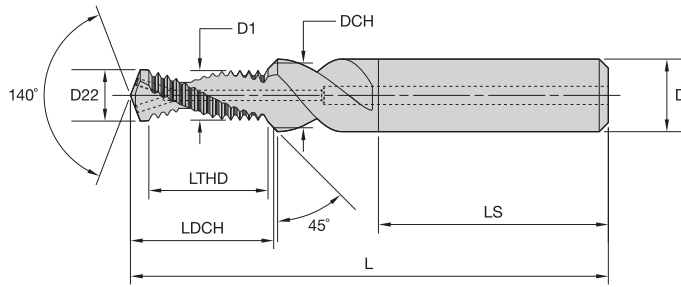


VICTORY

- first choice
- alternate choice

Shank Tolerance	
D	tolerance h6
6	+0, -0,008
8-10	+0, -0,009
12-18	+0, -0,011
20-30	+0, -0,013


■ GTM31 • Through Coolant • Inch UNC and UNF



	metric dimensions									cutting edges
	D1 TPI	D22	D1	DCH	LTHD	LDCH	L	LS	D	
WU12PV										
GTM315021	1/4-20	5,2	4,9	6,7	12,80	15,87	62	36	8,0	2
GTM315028	1/4-28	5,5	5,3	6,7	12,79	15,35	62	36	8,0	2
GTM315023	5/16-18	6,6	6,3	8,3	15,63	19,19	74	40	10,0	2
GTM315030	5/16-24	6,9	6,6	8,3	15,98	19,07	74	40	10,0	2
GTM315017	3/8-16	8,0	7,7	9,8	19,16	23,25	79	45	12,0	2
GTM315024	3/8-24	8,5	8,2	9,8	19,16	22,54	79	45	12,0	2
GTM315018	7/16-14	9,4	9,0	11,4	21,89	26,58	79	45	12,0	2
GTM315025	7/16-20	9,9	9,6	11,4	21,72	25,69	79	45	12,0	2
GTM315019	1/2-13	10,8	10,4	13,0	25,52	30,71	89	45	14,0	2
GTM315026	1/2-20	11,5	11,1	13,0	25,55	29,82	89	45	14,0	2
GTM315020	9/16-12	12,3	11,8	14,6	27,66	33,37	102	48	16,0	2
GTM315027	9/16-18	12,9	12,5	14,6	28,37	33,15	102	48	16,0	2
GTM315022	5/8-11	13,5	13,1	16,2	30,14	36,40	102	48	18,0	2
GTM315029	5/8-18	14,5	14,1	16,2	31,21	36,25	102	48	18,0	2

High-Performance Thread Mills

Victory™ Solid Carbide Thread Mills • Blind and Through Holes

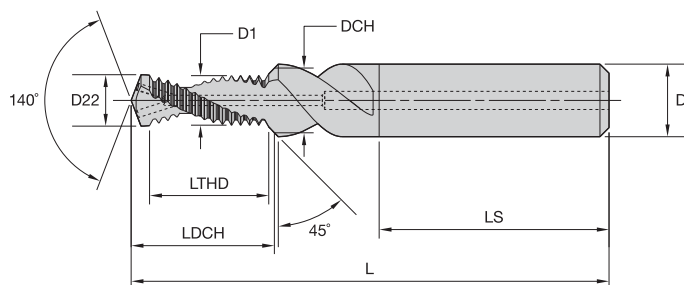


VICTORY


- first choice
- alternate choice

Shank Tolerance	
D	tolerance h6
6	+0, -0,008
8-10	+0, -0,009
12-18	+0, -0,011
20-30	+0, -0,013

■ GTM31 • Through Coolant • Metric and Metric Fine



	metric dimensions									cutting edges
	D1 size	D1	D22	DCH	LTHD	LDCH	L	LS	D	
WU12PV										
GTM315001	M4X0.7	3,2	3,3	4,3	7,74	9,6	49	36	6,0	2
GTM315002	M5X0.8	4,0	4,2	5,3	9,65	11,8	55	36	6,0	2
GTM315009	M6X0.75	5,1	5,3	6,3	12,07	14,4	62	36	8,0	2
GTM315003	M6X1	4,8	5,0	6,3	12,06	14,7	62	36	8,0	2
GTM315010	M8X1	6,8	7,0	8,3	16,09	19,1	74	40	10,0	2
GTM315004	M8X1.25	6,5	6,8	8,3	15,08	18,4	74	40	10,0	2
GTM315012	M10X1.25	8,4	8,8	10,3	20,11	23,9	79	45	12,0	2
GTM315005	M10X1.5	8,2	8,5	10,3	19,59	23,7	79	45	12,0	2
GTM315014	M12X1.5	10,2	10,5	12,3	24,12	28,6	89	45	14,0	2
GTM315006	M12X1.75	9,9	10,3	12,3	22,86	27,6	89	45	14,0	2
GTM315011	M10X1	8,7	9,0	10,3	20,11	23,5	79	45	12,0	2
GTM315013	M12X1.25	10,4	10,8	12,3	23,88	28,0	89	45	14,0	2
GTM315015	M14X1.5	12,1	12,5	14,3	27,14	32,0	102	48	16,0	2
GTM315007	M14X2	11,6	12,0	14,3	28,12	33,6	102	48	16,0	2
GTM315016	M16X1.5	14,1	14,5	16,3	31,65	36,9	102	48	18,0	2
GTM315008	M16X2	13,6	14,0	16,3	32,13	38,0	102	48	18,0	2

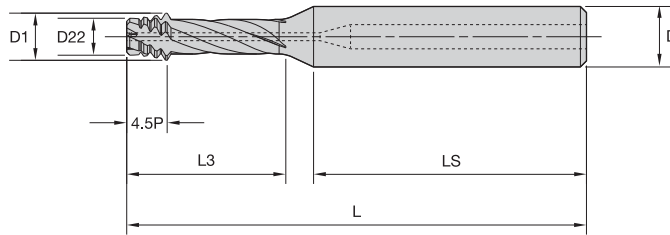


VICTORY

- first choice
- alternate choice

Shank Tolerance	
D	tolerance h6
6	+0, -0,008
8-10	+0, -0,009
12-18	+0, -0,011
20-30	+0, -0,013

■ GTM41 • Through Coolant • Right Hand • Inch UNC and UNF




WU16PV

	metric dimensions							cutting edges
	D1 TPI	D1	D22	L3	L	LS	D	
GTM415025	1/4-20	4,64	3,34	17,0	60	36	8,0	3
GTM415033	1/4-28	4,66	3,62	17,0	60	36	8,0	3
GTM415026	5/16-18	5,64	4,12	21,9	76	40	10,0	4
GTM415034	5/16-24	5,64	4,48	21,9	76	40	10,0	4
GTM415035	3/8-24	7,14	6,00	26,3	76	40	10,0	4
GTM415027	3/8-16	7,16	5,42	26,3	76	40	10,0	4
GTM415037	1/2-20	8,45	7,06	33,0	86	45	12,0	4
GTM415036	7/16-20	8,45	7,06	33,0	86	45	12,0	4
GTM415028	7/16-14	8,47	6,49	31,0	86	45	12,0	4
GTM415029	1/2-13	10,08	7,95	33,4	86	45	12,0	4
GTM415038	9/16-18	11,27	9,72	41,0	98	48	16,0	4
GTM415030	9/16-12	11,28	8,98	41,0	98	48	16,0	4
GTM415039	5/8-18	12,38	10,83	42,0	98	48	16,0	4
GTM415031	5/8-11	12,89	10,40	42,0	98	48	16,0	4
GTM415040	3/4-16	15,38	13,65	51,3	111	50	20,0	5
GTM415032	3/4-10	15,50	12,77	51,3	111	50	20,0	5

High-Performance Thread Mills

Victory™ Solid Carbide Thread Mills • Blind and Through Holes

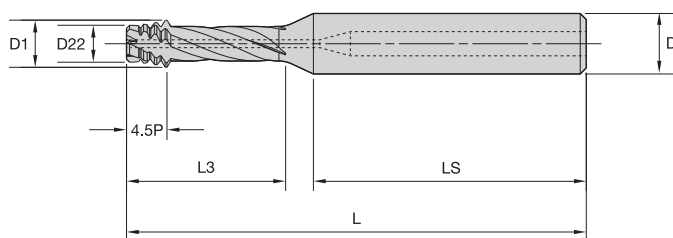


VICTORY

- first choice
- alternate choice


Shank Tolerance	
D	tolerance h6
6	+0, -0,008
8-10	+0, -0,009
12-18	+0, -0,011
20-30	+0, -0,013

■ GTM41 • Through Coolant • Right Hand • Metric and Metric Fine



WU16PV


		metric dimensions						cutting edges
	D1 size	D1	D22	L3	L	LS	D	
GTM415001	M6X1	4,51	3,41	17	60	36	8,0	3
GTM415002	M7X1	4,51	3,41	17	60	36	8,0	3
GTM415013	M10X1.25	6,23	4,91	22	71	40	10,0	4
GTM415003	M8X1.25	6,23	4,91	22	71	40	10,0	4
GTM415004	M9X1.25	6,23	4,91	22	71	40	10,0	4
GTM415016	M10X1	6,23	5,13	22	71	40	10,0	4
GTM415014	M8X1	6,23	5,13	22	71	40	10,0	4
GTM415015	M9X1	6,23	5,13	22	71	40	10,0	4
GTM415005	M10X1.5	7,75	6,11	26	76	40	10,0	4
GTM415006	M11X1.5	7,75	6,11	26	76	40	10,0	4
GTM415007	M12X1.5	7,75	6,11	26	76	40	10,0	4
GTM415017	M12X1	9,15	8,06	30	86	45	12,0	4
GTM415018	M14X1	9,15	8,06	30	86	45	12,0	4
GTM415008	M12X1.75	9,16	7,21	32	86	45	12,0	4
GTM415019	M14X1.5	10,83	9,15	37	98	48	16,0	4
GTM415020	M16X1.5	10,83	9,15	37	98	48	16,0	4
GTM415009	M14X2	11,08	8,91	41	98	48	16,0	4
GTM415010	M16X2	11,08	8,91	41	98	48	16,0	4
GTM415011	M18X2.5	14,38	11,71	51	111	50	20,0	5
GTM415012	M20X2.5	14,38	11,71	51	111	50	20,0	5
GTM415021	M18X1.5	14,83	13,15	47	98	48	16,0	4
GTM415022	M20X1.5	14,83	13,15	47	98	48	16,0	4
GTM415023	M22X1.5	18,23	16,55	56	111	50	20,0	5
GTM415024	M24X1.5	18,23	16,55	56	111	50	20,0	5

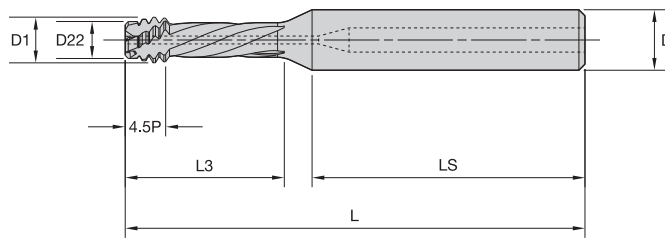

- first choice
- alternate choice

D	tolerance h6
6	+0, -0,008
8-10	+0, -0,009
12-18	+0, -0,011
20-30	+0, -0,013

■ GTM41 • Through Coolant • Left Hand • Metric and Metric Fine



WU16PV	D1 size	D1	D22	L3	L	LS	D	Cutting edges
GTM415041	M6X1	4,51	3,41	17	60	36	8,0	3
GTM415042	M7X1	4,51	3,41	17	60	36	8,0	3
GTM415043	M8X1.25	6,23	4,91	22	71	40	10,0	4
GTM415044	M9X1.25	6,23	4,91	22	71	40	10,0	4
GTM415045	M10X1.5	7,75	6,11	26	76	40	10,0	4
GTM415046	M11X1.5	7,75	6,11	26	76	40	10,0	4
GTM415047	M12X1.5	9,17	7,21	32	86	45	12,0	4

High-Performance Thread Mills

■ GTM11 and GTM21 • Metric

Material Group		Thread Mill GTM11						Thread Mill • Chamfer GTM21					
		Cutting Speed — vc Range — m/min			Feed/Tooth by Diameter			Cutting Speed — vc Range — m/min			Feed/Tooth by Diameter		
		min	Starting Value	max		<10mm	>10mm	min	Starting Value	max		<10mm	>10mm
					mm						mm		
P	1	90	115	150	mm	0,05	0,08	140	185	240	mm	0,06	0,10
	2	90	115	150	mm	0,05	0,08	140	185	240	mm	0,06	0,10
	3	40	50	70	mm	0,02	0,03	70	90	120	mm	0,03	0,04
	4	—	—	—	—	—	—	70	90	120	mm	0,03	0,04
	5	60	80	100	mm	0,04	0,06	70	90	120	mm	0,05	0,08
	6	—	—	—	—	—	—	—	—	—	—	—	—
M	1	60	80	100	mm	0,04	0,06	70	90	120	mm	0,05	0,08
	2	60	80	100	mm	0,04	0,06	70	90	120	mm	0,05	0,08
	3	—	—	—	—	—	—	—	—	—	—	—	—
K	1	120	150	200	mm	0,06	0,10	130	170	220	mm	0,06	0,11
	2	120	150	200	mm	0,06	0,10	130	170	220	mm	0,06	0,11
	3	90	115	150	mm	0,05	0,07	110	140	180	mm	0,05	0,07
N	1	200	225	250	mm	0,05	0,06	270	300	330	mm	0,08	0,16
	2	170	190	210	mm	0,04	0,05	160	175	190	mm	0,08	0,16
	3	250	275	300	mm	0,07	0,09	270	300	330	mm	0,08	0,16
	4	250	275	300	mm	0,07	0,09	270	300	330	mm	0,08	0,16
	5	270	300	330	mm	0,12	0,13	250	275	300	mm	0,11	0,20
	6	170	190	210	mm	0,05	0,06	90	100	110	mm	0,11	0,20
S	1	60	80	100	mm	0,04	0,06	70	90	120	mm	0,05	0,08
	2	50	65	80	mm	0,03	0,04	50	60	80	mm	0,03	0,05
	3	50	65	80	mm	0,03	0,04	50	60	80	mm	0,03	0,05
	4	50	65	80	mm	0,03	0,04	50	60	80	mm	0,03	0,05

■ GTM31 • Metric

Material Group		Drill • Chamfer • Thread Mill GTM31										
		Cutting Speed — vc Range — m/min			Drilling Recommended Feed by Diameter			Milling Feed/Tooth by Diameter				
		min	Starting Value	max		<6mm	6–10mm	10–16mm		<6mm	6–10mm	10–16mm
					mm/r				mm			
K	1	130	175	230	mm/r	0,10	0,16	0,30	mm	0,05	0,07	0,10
N	1	270	300	330	mm/r	0,15	0,25	0,34	mm	0,06	0,08	0,12
	2	140	150	170	mm/r	0,15	0,25	0,34	mm	0,06	0,08	0,12
	4	270	300	330	mm/r	0,15	0,25	0,34	mm	0,06	0,08	0,12
	5	110	120	130	mm/r	0,12	0,20	0,32	mm	0,06	0,08	0,12

■ Universal Thread Mills • GTM41 • Metric

Material Group									
		Mill • Chamfer • Thread Mill GTM41							
				Cutting Speed — vc Range — m/min			Feed/Tooth by Diameter		
		TM Style	Grade	min	Starting Value	max		<10mm	>10mm
P	1	GTM41 R	KCU36	170	225	290	mm	0,05	0,08
	2	GTM41 R	KCU36	170	225	290	mm	0,05	0,08
	3	GTM41 R	KCU36	120	150	200	mm	0,03	0,05
	4	GTM41 R	KCU36	100	125	160	mm	0,03	0,05
	5	GTM41 R	KCU36	120	150	200	mm	0,03	0,04
	6	GTM41 R	KCU36	60	80	100	mm	0,03	0,04
M	1	GTM41 R	KCU36	120	150	200	mm	0,03	0,04
	2	GTM41 R	KCU36	120	150	200	mm	0,03	0,04
	3	GTM41 R	KCU36	120	150	200	mm	0,03	0,04
K	1	GTM41 R	KCU36	190	250	330	mm	0,06	0,10
	2	GTM41 R	KCU36	190	250	330	mm	0,06	0,10
	3	GTM41 R	KCU36	140	185	240	mm	0,04	0,07
N	1	—	—	—	—	—	—	—	—
	2	GTM41 R	KCU36	180	230	300	mm	0,06	0,07
	3	—	—	—	—	—	—	—	—
	4	GTM41 R	KCU36	210	275	360	mm	0,06	0,07
	5	—	—	—	—	—	—	—	—
	6	GTM41 R	KCU36	210	275	360	mm	0,06	0,07
S	1	GTM41 L	KCU36	120	150	200	mm	0,025	0,045
	2	GTM41 L	KCU36	50	60	80	mm	0,015	0,025
	3	GTM41 L	KCU36	50	60	80	mm	0,015	0,025
	4	GTM41 L	KCU36	70	90	120	mm	0,025	0,035
H	1	GTM41	KCU36	80	100	130	mm	0,030	0,050
	2	GTM41	KCU36	80	100	130	mm	0,030	0,050
	3	GTM41	KCU36	50	65	80	mm	0,020	0,030
	4	GTM41	KCU36	50	65	80	mm	0,020	0,030

NOTE: For thread depths over 2 x D and up to 3 x D, reduce speed by 25% and feed by 25%.

Thread Milling Methods

Climb Milling

Properties:



Tool rotation direction clockwise

Tool moves anti-clockwise

Pitch upwards

Right-hand thread

Climb milling is always when the cutting edge goes out of the material with a chip thickness $h = 0$



Conventional Milling

Properties:



Tool rotation direction clockwise

Tool moves clockwise

Pitch downwards


Right-hand thread

Conventional milling is always when the cutting edge goes out of the material with a chip thickness $h = \max$




Counter Feed F_k

$$F_k = n \cdot f_z \cdot Z \text{ [mm/min]}$$

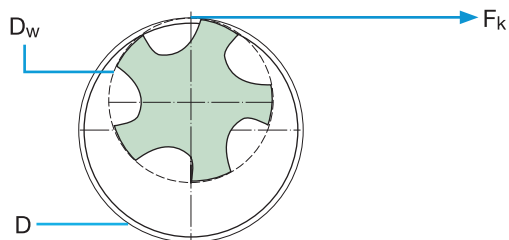


Centre Point Feed F_m

$$F_m = \frac{F_k \cdot (D - D_w)}{D} \text{ [mm/min]}$$

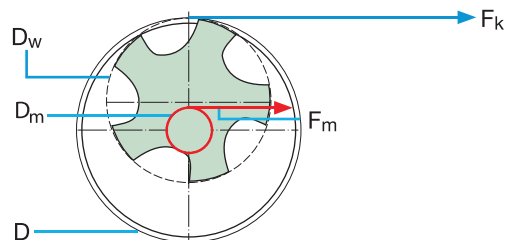

Counter Feed (F_k)

Centre Point Feed (F_m)

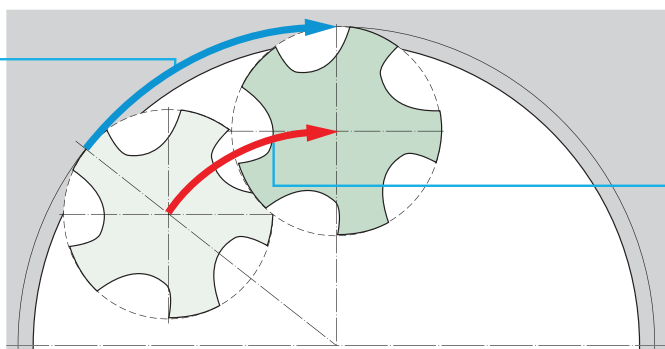

D_w = Tool diameter [mm]

n = RPM [min^{-1}]

f_z = Feed per tooth [mm]

Z = Number of teeth on tool (radial)

D = Nominal diameter of thread = Diameter of external contour [mm]

D_m = Diameter of the centre point ($D - D_w$) [mm]

Thread Mill GTM21


Preparation

Drilling of thread hole


Process Principle

Countersinking, thread milling (conventional milling)

Cycle

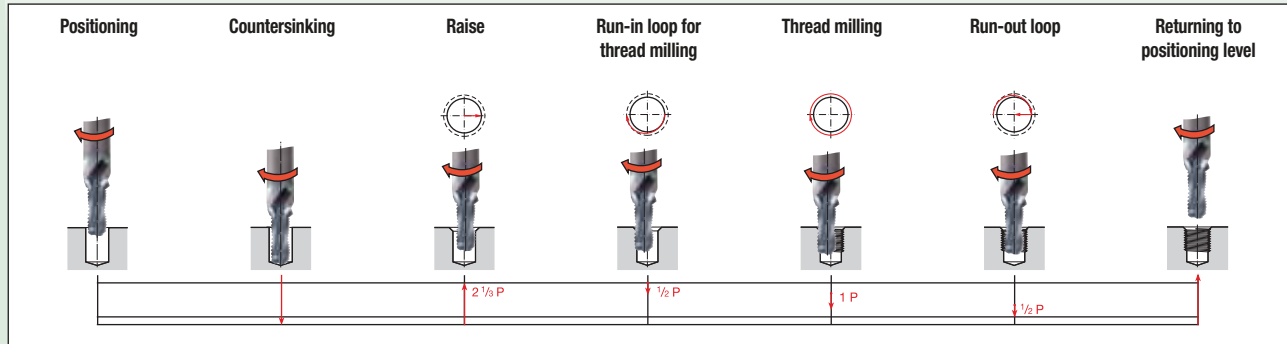

Required Specification Values

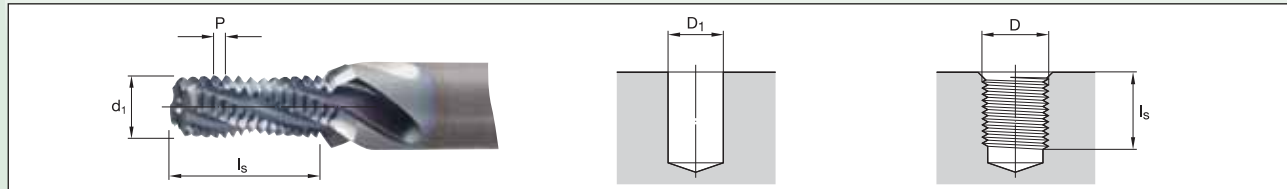

Example

Size — M10-6H
Thread diameter D10mm
Pitch1,5mm
Core hole diameter D₁8,5mm
Material — Cast aluminium
Grade — WU12PV

Tool — GTM21
Catalogue numberGTM215004
Number of teeth Z3
Tool diameter d₁8,2mm*
Tool radius compensation k¹0,1mm**
Tool radius to be programmed²4mm***
Countersink depth l_s21,2mm
Cutting speed v_c250 m/min
Feed (countersinking) f_s0,3 mm/U
Feed (milling) f_z0,09 mm/tooth

$$N = \frac{v_c \cdot 1000}{d_1 \cdot \pi} \quad S = 9709$$

$$v_s = f_s \cdot n \quad F = 2913 \text{ (countersinking)}$$

$$v_f = f_z \cdot Z \cdot n \quad F = 2622 \text{ (contour)}$$

$$v_f = \frac{v_f \text{ contour} \cdot (D - d_1)}{D} \quad F = 472 \text{ (centre point)}$$

*(measured on the cutting part)

**(0.01 x D)

***((1/2 d₁ - k)

Program to DIN 66025 (conventional milling, on the contour, incremental)

Positioning the tool	N 10	G 54	G 90	G 00	X...	Y...	Z 2	S 9709	T01 ²	M03
Advancing tool to full thread depth	N 20	G 91	Z-21.200							
Countersinking	N 30	G 01	Z-2	F 2913 (countersink)						
Raise	N 40	G 00	Z 3.450							
Moving sideways to the starting point	N 50	G 42	G01	X 4.250	F 1311 (milling, 1/2 contour)		[F 236] ³ (milling, 1/2 centre point)			
Run-in loop in arc	N 60	G 02	X-9.25	Y 0.000	Z-0.750	I-4.625	J 0			
Thread milling	N 70	G 02	X 0	Y 0	Z-1.500	I 5	J 0.000	F2622 [F 472] ³ (centre point)		
Run-out loop in arc	N 80	G 02	X 9.25	Y 0.000	Z-0.750	I 4.625	J 0			
Exit	N 90	G 40	G 01	X-4.25						
Retracting tool to positioning level	N 100	G 90	G 00	Z 2						

Cutting time t_h

1.4 seconds

NOTES:

¹ The cutter radius measured over the tooth crests of the threaded part must be reduced by the amount of the cutter radius compensation. This is necessary to achieve a depth of cut to the middle of the 6H/ISO2 nut tolerance. Please note, however, that this also depends on the radial deflection of the tool (tensile strength of the material, projecting length of the tool).

² The cutter radius to be programmed is normally included in the tool memory.

³ The feed values in brackets must be used for controllers, which do not calculate the centre point feed themselves.

Drill Thread Mill GTM41 • Right Hand


Preparation

None


Process Principle

Milling thread and core hole, countersinking (conventional milling)

Cycle

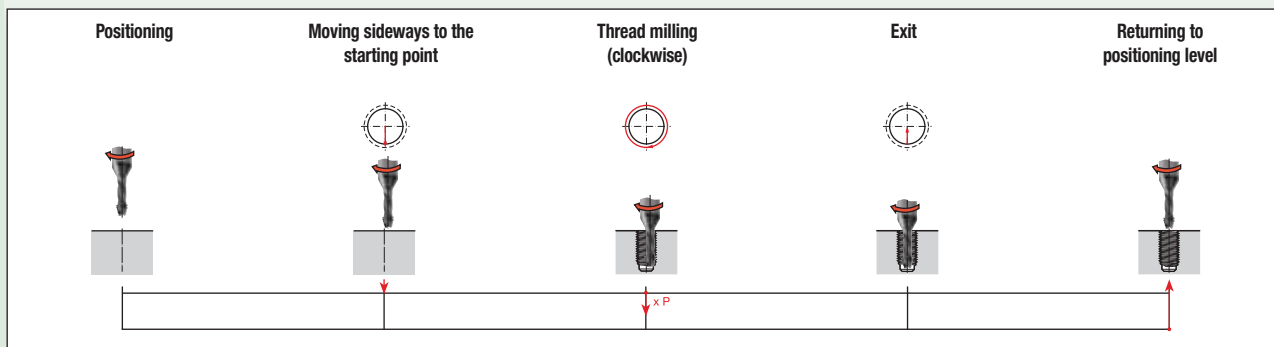

Required Specification Values

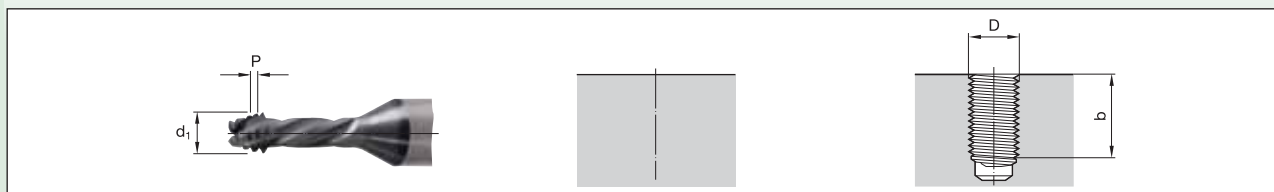

Example

Size — M10-6H
 Thread diameter D10mm
 Pitch.....1,5mm
 Core hole diameter D₁8,5mm

Material — Hard steel, 50 HRC

Grade — WU16PV

Tool — GTM41 Right Hand
 Catalogue numberGTM415005
 Number of teeth Z4
 Tool diameter d₁7,75mm*
 Tool radius compensation k¹0,08mm**
 Tool radius to be programmed²3,795mm***
 Thread depth b20mm
 Cutting speed v_c100 m/min
 Feed (milling) f_z0,04 mm/tooth
 Number of turns⁵17

$$N = \frac{v_c \cdot 1000}{d_1 \cdot \pi} \quad S = 4109$$

$$v_f = f_z \cdot Z \cdot n \quad F = 657 \text{ (contour)}$$

$$N = \frac{v_f \text{ contour} \cdot (D - d_1)}{D} \quad F = 148 \text{ (centre point)}$$

*(measured on the cutting part)

** (0.01 x D; adjust to application)

*** (1/2 d₁ - k)

Program to DIN 66025 (conventional milling, on the contour, incremental)

Positioning the tool	N 10	G 54	G 90	G 00	X...	Y...	Z 1.500	S 4109	T01 ²	M03 ⁶
Incremental programming	N 20	G 91								
Moving sideways to the starting point	N 30	G 42	G 01	X 0	Y-5	F 657 (contour)		[F 148] ⁴ (centre point)		
Thread milling	N 40	G 02		X 0	Y 0	Z-1.500	I 0	J 5.000		
Repeat thread milling	... ⁵									
Exit	N 50	G 40	G 01	X 0	Y 5					
Retracting tool to positioning level	N 70	G 90	G 00	Z 2						

Cutting time t_H

51.6 seconds

NOTES:

¹ The cutter radius measured over the tooth crests of the threaded part must be reduced by the amount of the cutter radius compensation. This is necessary to achieve a depth of cut to the middle of the 6H/ISO2 nut tolerance. Please note, however, that this also depends on the radial deflection of the tool (tensile strength of the material, projecting length of the tool).

² The cutter radius to be programmed is normally included in the tool memory.

³ The thread depth b must be divisible by the thread pitch P.

⁴ The feed values in brackets must be used for controllers, which do not calculate the centre point feed themselves.

⁵ Set N40 must be repeated with the number of threads. Repetitions N = thread depth b/pitch P (rounded up to the nearest integer).

Drill Thread Mill GTM41 • Left Hand


Preparation

None


Process Principle

Milling thread and core hole, countersinking (climb milling)

Cycle

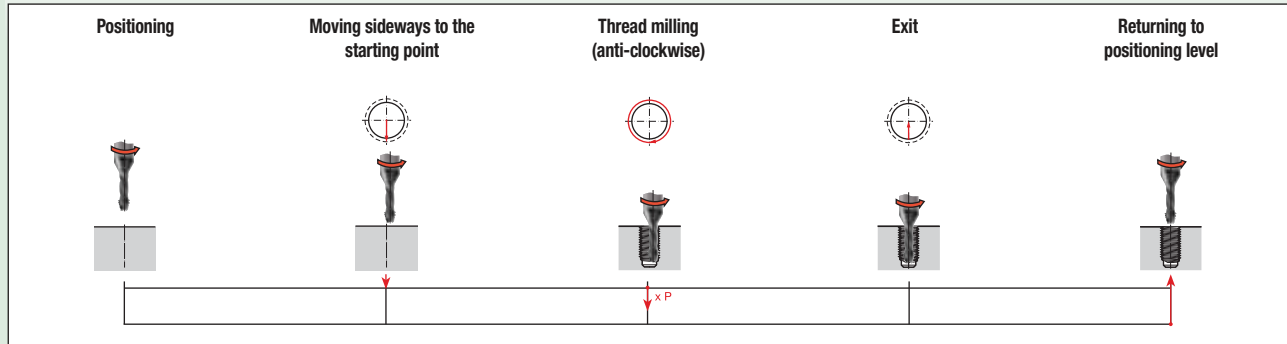

Required Specification Values

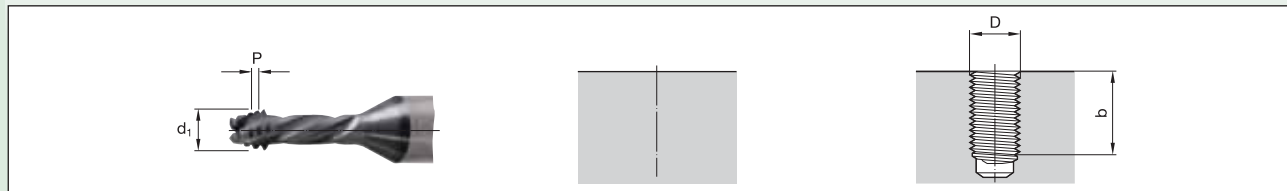

Example

Size — M10-6H
 Thread diameter D10mm
 Pitch.....1,5mm
 Core hole diameter D₁8,5mm
Material — TiAl6V4 titanium
Grade — WU16PV

Tool — GTM41 Left Hand
 Catalogue numberGTM415045
 Number of teeth Z4
 Tool diameter d₁7,75mm*
 Tool radius compensation k¹0,08mm**
 Tool radius to be programmed²3,795mm***
 Drilling/countersink depth l_E20mm
 Cutting speed v_c100 m/min
 Feed (milling) f_z0,03 mm/tooth
 Number of turns⁵17

*(measured on the cutting part)

**((0.01 x D)

***((1/2 d₁ - k)

$$N = \frac{v_c \cdot 1000}{d_1 \cdot \pi} \quad S = 4109$$

$$v_f = f_z \cdot Z \cdot n \quad F = 493 \text{ (contour)}$$

$$v_f = \frac{v_f \text{ contour} \cdot (D - d_1)}{D} \quad F = 111 \text{ (centre point)}$$

Program to DIN 66025 (climb milling, on the contour, incremental)

Positioning the tool	N 10	G 54	G 90	G 00	X...	Y...	Z 1.500	S 4109	T01 ²	M04
Incremental programming	N 20	G 91								
Moving sideways to the starting point	N 30	G 42	G 01	X 0	Y-5	F 493 (contour)		[F 111] ⁴		(centre point)
Thread milling	N 40	G 02		X 0	Y 0	Z-1.500	I 0	J 5.000		
Repeat thread milling	... ⁵									
Exit	N 50	G 40	G 01	X 0	Y 5					
Retracting tool to positioning level	N 70	G 90	G 00	Z 2						

Cutting time t_H

68.8 seconds

NOTES:

¹ The cutter radius measured over the tooth crests of the threaded part must be reduced by the amount of the cutter radius compensation. This is necessary to achieve a depth of cut to the middle of the 6H/ISO2 nut tolerance. Please note, however, that this also depends on the radial deflection of the tool (tensile strength of the material, projecting length of the tool).

² The cutter radius to be programmed is normally included in the tool memory.

³ The thread depth b must be divisible by the thread pitch P.

⁴ The feed values in brackets must be used for controllers, which do not calculate the centre point feed themselves.

⁵ Set N40 must be repeated with the number of threads. Repetitions N = thread depth b/pitch P (rounded up to the nearest integer).

Drill Thread Mill GTM31


Preparation

None


Process Principle

Drilling, countersinking, thread milling (climb milling)

Cycle

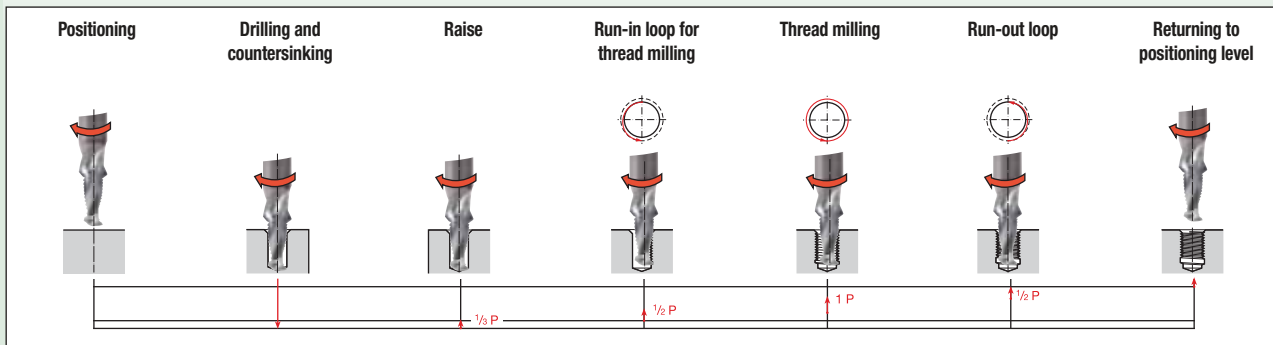

Required Specification Values

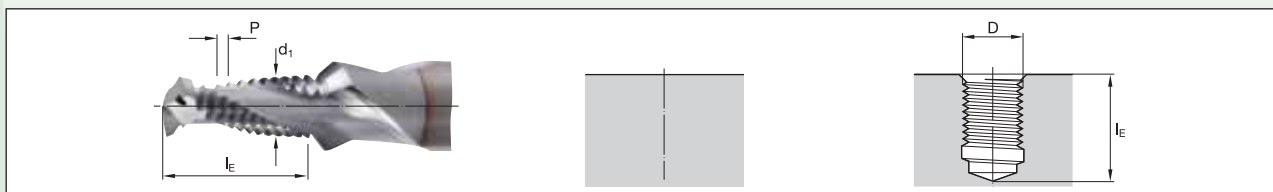

Example

Size — M10-6H
 Thread diameter D10mm
 Pitch.....1,5mm
 Core hole diameter D₁8,5mm

Material — Grey cast iron

Grade — WU12PV

Tool — GTM31
 Catalogue numberGTM315005
 Number of teeth Z2
 Tool diameter d₁8,2mm*
 Tool radius compensation k¹0,1mm**
 Tool radius to be programmed²4mm***
 Drilling/countersink depth l_E.....19,11mm
 Cutting speed v_c.....250 m/min
 Feed (drilling, countersinking) f_b0,25 mm/U
 Feed (milling) f_z0,1 mm/tooth

$$N = \frac{v_c \cdot 1000}{d_1 \cdot \pi} \quad S = 9709$$

$$v_b = f_b \cdot n \quad F = 2427 \text{ (drilling, countersinking)}$$

$$v_f = f_z \cdot Z \cdot n \quad F = 1942 \text{ (contour)}$$

$$v_f = \frac{v_f \text{ contour} \cdot (D - d_1)}{D} \quad F = 350 \text{ (centre point)}$$

*(measured on the cutting part)

** (0.01 x D)

*** (1/2 d₁ - k)

Program to DIN 66025 (climb milling, on the contour, incremental)

Positioning the tool	N 10	G 54	G 90	G 00	X...	Y...	Z 2	S 9709	T01 ²	M03
Drilling and countersinking	N 20	G 91	G 01	Z-21.110	F 2427	(drill, countersink)				
Raise	N 30	G 01	Z 0.500							
Moving sideways to the starting point	N 40	G 41	Y-4.250	F 971	(milling, 1/2 contour)		[F 175] ³	(1/2 centre point)		
Run-in loop in arc	N 50	G 03	X 0	Y 9.250	Z 0.750	I 0	J 4.625			
Thread milling	N 60	G 03	X 0	Y 0	Z 1.500	I 0	J -5.000	F1942	[F 350] ³	(centre point)
Run-out loop in arc	N 70	G 03	X 0	Y-9.250	Z 0.750	I 0	J- 4.625			
Exit	N 80	G 00	G 40	X 0	Y 4.250					
Retracting tool to positioning level	N 90	G 90	Z 2							

Cutting time t_h

2.3 seconds

NOTES:

¹ The cutter radius measured over the tooth crests of the threaded part must be reduced by the amount of the cutter radius compensation. This is necessary to achieve a depth of cut to the middle of the 6H/ISO2 nut tolerance. Please note, however, that this also depends on the radial deflection of the tool (tensile strength of the material, projecting length of the tool).

² The cutter radius to be programmed is normally included in the tool memory.

³ The feed values in brackets must be used for controllers, which do not calculate the center point feed themselves.

WIN WITH WIDIATM



VictoryTM GT HP HSS-E-PM Wind Taps



Boost productivity on large-sized components.

- Made with highly alloyed powdered metal HSS-E-PM substrate that combines wear and heat resistance with toughness.
- GP6520TM Grade provides long tap life at high tapping speeds.
- Precision h6 shank results in exceptional thread quality and tool life due a very low runout.
- GT20 through holes.
- GT30 and GT31 for blind holes on vertical tapping.
- GT50 and GT51 for blind holes on horizontal tapping.
- All GTTM Series Wind Taps are available according to DIN 376 and extra-long lengths as standard.




To learn more about our innovations, contact your local Authorised Distributor or visit www.widia.com.


WIDIA 

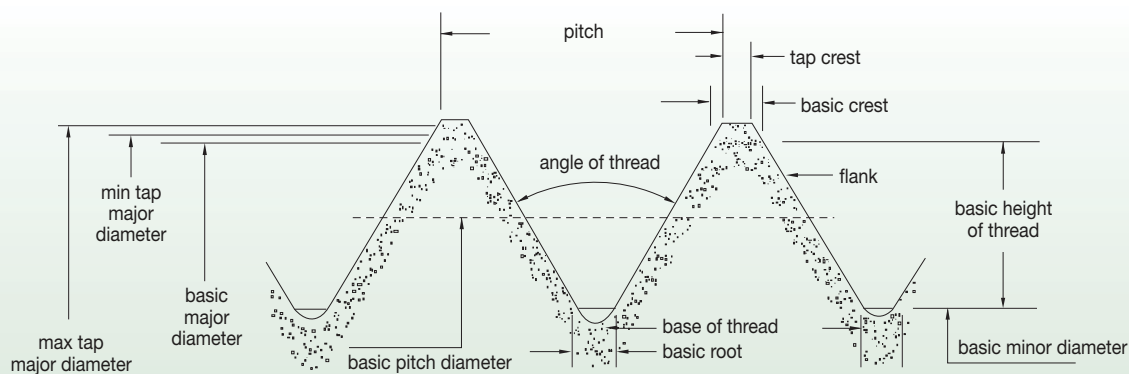


Concentric




Eccentric Relief



Con-Eccentric Relief

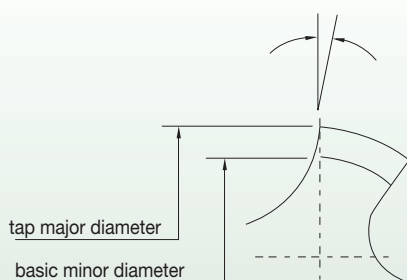


Negative Hook




0° Hook




Positive Hook



Negative Rake



Radial Rake




Positive Rake


Reprinted with permission from United States Cutting Tool Institute (USCTI).

■ Tap Chamfers • DIN Taps


Taper Chamfer
7–10 Pitches




Plug Chamfer
3–5 Pitches



Modified Bottoming Chamfer
2–2-1/2 Pitches



Full Bottoming Chamfer
1–2 Pitches



Hand Tap Chamfers

Form A (6–8 pitches)

The Form A chamfer has the longest standard chamfer ensuring easier starting. It requires less tapping torque because of more working teeth.

Form B/D (3.5–5 pitches)




The most common chamfers for use by hand or machine in through or blind holes. Form B applies to spiral-point taps and Form D applies to straight-flute and spiral-flute taps. This chamfer is more efficient than a Form E or Form C chamfers.

Form C (2–2-1/2 pitches)

This short chamfer enables threading close to the bottom of blind holes. Due to the slightly longer chamfer and more working teeth, this chamfer is more efficient than a Form E chamfer.


Form E (1.5–2 pitches)

For threading close to the bottom of blind holes, the Form E chamfer is the least efficient chamfer available.

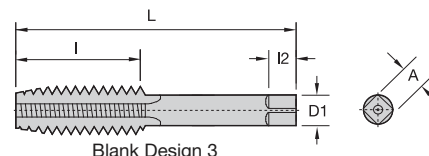

nominal diameter range (in)	machine screw size number (in)	nominal fractional diameter (in)	nominal metric diameter mm (in)	blank design number	overall length L	thread length I	square length I2	shank diameter D1	square size A
.052-.065	0 (.0600)	—	M1.6 (.0630)	1	1.63	.31	.19	.1410	.110
.065-.078	1 (.0730)	—	M1.8 (.0709)	1	1.69	.38	.19	.1410	.110
.078-.091	2 (.0860)	—	M2 (0787), M2.2 (.0866)	1	1.75	.44	.19	.1410	.110
.091-.104	3 (.0990)	—	M2.5 (.0984)	1	1.81	.50	.19	.1410	.110
.104-.117	4 (.1120)	—	—	1	1.88	.56	.19	.1410	.110
.117-.130	5 (.1250)	—	M3 (.1181)	1	1.94	.63	.19	.1410	.110
.130-.145	6 (.1380)	—	M3.5 (.1378)	1	2.00	.69	.19	.1410	.110
.145-.171	8 (.1640)	—	M4 (.1575)	1	2.13	.75	.25	.1680	.131
.171-.197	10 (.1900)	—	M4.5 (.1772), M5 (.1969)	1	2.38	.88	.25	.1940	.152
.197-.223	12 (.2160)	—	—	1	2.38	.94	.28	.2200	.165
.223-.260	—	1/4 (.2500)	M6 (.2362)	2	2.50	1.00	.31	.2550	.191
.260-.323	—	5/16 (.3125)	M7 (.2756), M8 (.3150)	2	2.72	1.13	.38	.3180	.238
.323-.395	—	3/8 (.3750)	M10 (.3937)	2	2.94	1.25	.44	.3810	.286
.395-.448	—	7/16 (.4375)	—	3	3.16	1.44	.41	.3230	.242
.448-.510	—	1/2 (.5000)	M12 (.4724)	3	3.38	1.66	.44	.3670	.275
.510-.573	—	9/16 (.5625)	M14 (.5512)	3	3.59	1.66	.50	.4290	.322
.573-.635	—	5/8 (.6250)	M16 (.6299)	3	3.81	1.81	.56	.4800	.360
.635-.709	—	11/16 (.6875)	M18 (.7087)	3	4.03	1.81	.63	.5420	.406
.709-.760	—	3/4 (.7500)	—	3	4.25	2.00	.69	.5900	.442
.760-.823	—	13/16 (.8125)	M20 (.7874)	3	4.47	2.00	.69	.6520	.489
.823-.885	—	7/8 (.8750)	M22 (.8661)	3	4.69	2.22	.75	.6970	.523
.885-.948	—	15/16 (.9375)	M24 (.9449)	3	4.91	2.22	.75	.7600	.570
.948-1.010	—	1 (1.0000)	M25 (.9843)	3	5.13	2.50	.81	.8000	.600
1.010-1.073	—	1-1/16 (1.0625)	M27 (1.0630)	3	5.13	2.50	.88	.8960	.672
1.073-1.135	—	1-1/8 (1.1250)	—	3	5.44	2.56	.88	.8960	.672
1.135-1.198	—	1-3/16 (1.1875)	M30 (1.1811)	3	5.44	2.56	1.00	1.0210	.766
1.198-1.260	—	1-1/4 (1.2500)	—	3	5.75	2.56	1.00	1.0210	.766
1.260-1.323	—	1-5/16 (1.3125)	M33 (1.2992)	3	5.75	2.56	1.06	1.1080	.831
1.323-1.385	—	1-3/8 (1.3750)	—	3	6.06	3.00	1.06	1.1080	.831
1.385-1.448	—	1-7/16 (1.4375)	M36 (1.4173)	3	6.06	3.00	1.13	1.2330	.925
1.448-1.510	—	1-1/2 (1.5000)	—	3	6.38	3.00	1.13	1.2330	.925
1.510-1.635	—	1-5/8 (1.6250)	M39 (1.5354)	3	6.69	3.19	1.13	1.3050	.979
1.635-1.760	—	1-3/4 (1.7500)	M42 (1.6535)	3	7.00	3.19	1.25	1.4300	1.072
1.760-1.885	—	1-7/8 (1.8750)	—	3	7.31	3.56	1.25	1.5190	1.139
1.885-2.010	—	2 (2.0000)	M48 (1.8898)	3	7.63	3.56	1.38	1.6440	1.233
2.010-2.135	—	2-1/8 (2.1250)	—	3	8.00	3.56	1.38	1.7690	1.327
2.135-2.260	—	2-1/4 (2.2500)	M56 (2.2047)	3	8.25	3.56	1.44	1.8940	1.420
2.260-2.385	—	2-3/8 (2.3750)	—	3	8.50	4.00	1.44	2.0190	1.514
2.385-2.510	—	2-1/2 (2.5000)	—	3	8.75	4.00	1.50	2.1000	1.575
2.510-2.635	—	2-5/8 (2.6250)	M64 (2.5197)	3	8.75	4.00	1.50	2.2250	1.669
2.635-2.760	—	2-3/4 (2.7500)	—	3	9.25	4.00	1.56	2.3500	1.762
2.760-2.885	—	2-7/8 (2.8750)	M72 (2.8346)	3	9.25	4.00	1.56	2.4750	1.856
2.885-3.010	—	3 (3.0000)	—	3	9.75	4.56	1.63	2.5430	1.907
3.010-3.135	—	3-1/8 (3.1250)	—	3	9.75	4.56	1.63	2.6680	2.001
3.135-3.260	—	3-1/4 (3.2500)	M80 (3.1496)	3	10.00	4.56	1.75	2.7930	2.095
3.260-3.385	—	3-3/8 (3.3750)	—	3	10.00	4.56	1.75	2.8830	2.162
3.385-3.510	—	3-1/2 (3.5000)	—	3	10.25	4.94	2.00	3.0080	2.256
3.510-3.635	—	3-5/8 (3.6250)	M90 (3.5433)	3	10.25	4.94	2.00	3.1330	2.350
3.635-3.760	—	3-3/4 (3.7500)	—	3	10.50	5.31	2.13	3.2170	2.413
3.760-3.885	—	3-7/8 (3.8750)	—	3	10.50	5.31	2.13	3.3420	2.506
3.885-4.010	—	4 (4.0000)	M100 (3.9370)	3	10.75	5.31	2.25	3.4670	2.600

Reprinted with permission from United States Cutting Tool Institute (USCTI). Published by Kennametal Inc. © 2005. All rights reserved.

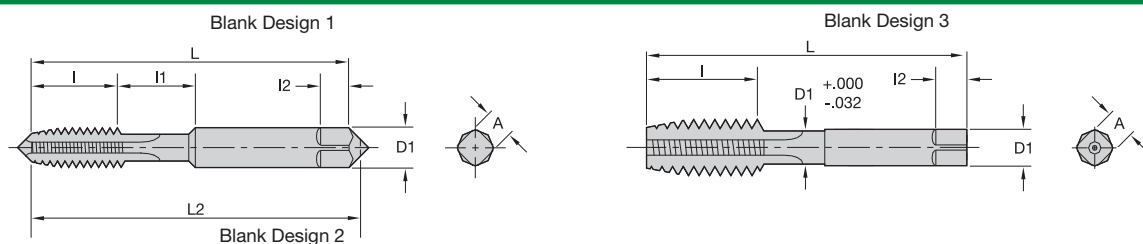

General Dimensions

nominal diameter range (in)	machine screw size number (in)	nominal fractional diameter (in)	nominal metric diameter mm (in)	blank design number	Tap Dimensions — Inches					
					overall length L	thread length I	neck length I1	square length I2	shank diameter D1	square size A
.104 .117	4 (.1120)	—	—	1	1.88	.31	.25	.19	.1410	.110
.117 .130	5 (.1250)	—	M3 (.1181)	1	1.94	.31	.31	.19	.1410	.110
.130 .145	6 (.1380)	—	M3.5 (.1378)	1	2.00	.38	.31	.19	.1410	.110
.145 .171	8 (.1640)	—	M4 (.1575)	1	2.13	.38	.38	.25	.1680	.131
.171 .197	10 (.1900)	—	M4.5 (.1772)	1	2.38	.50	.38	.25	.1940	.152
.197 .223	12 (.2160)	—	—	1	2.38	.50	.44	.28	.2200	.165
.223 .260	—	1/4 (.2500)	M6 (.2362)	2	2.50	.63	.38	.31	.2550	.191
.260 .323	—	5/16 (.3125)	M7 (.2756), M8 (.3150)	2	2.72	.69	.44	.38	.3180	.238
.323 .395	—	3/8 (.3750)	M10 (.3937)	2	2.94	.75	.50	.44	.3810	.286
.395 .448	—	7/16 (.4375)	—	3	3.16	.88	—	.41	.3230	.242
.448 .510	—	1/2 (.5000)	M12 (.4724)	3	3.38	.94	—	.44	.3670	.275
.510 .573	—	9/16 (.5625)	M14 (.5541)	3	3.59	1.00	—	.50	.4290	.322
.573 .635	—	5/8 (.6250)	M16 (.6299)	3	3.81	1.09	—	.56	.4800	.360
.635 .709	—	11/16 (.6875)	M18 (.7087)	3	4.03	1.09	—	.63	.5420	.406
.709 .760	—	3/4 (.7500)	—	3	4.25	1.22	—	.69	.5900	.442
.760 .823	—	13/16 (.8125)	M20 (.7874)	3	4.47	1.22	—	.69	.6520	.489
.823 .885	—	7/8 (.8750)	M22 (.8661)	3	4.69	1.34	—	.75	.3670	.523
.885 .948	—	15/16 (.9375)	M24 (.9449)	3	4.91	1.34	—	.75	.7600	.570
.948 1.010	—	1 (1.0000)	M25 (.9843)	3	5.13	1.50	—	.81	.8000	.600

Reprinted with permission from United States Cutting Tool Institute (USCTI). Published by Kennametal Inc. © 2005. All rights reserved.

NOTE: Thread length I is based on a length of 12 pitches of the UNC thread series. Thread length "I" is a minimum value and has no tolerance. When thread length "I" is added to neck length "I1", the total shall be no less than the minimum USCTI Table 302 thread length "I". Unless otherwise specified, all tolerances are in accordance with USCTI Table 302. For eccentricity tolerances, see USCTI Table 317. Table 302 is provided for reference only. WIDIA-GTD™ tap dimensions may differ.

Tolerances

element	nominal diameter range (in)	direction	tolerance (in)
length overall — L	.0520–1.0100	plus or minus	.031
	1.0100–4.0100	plus or minus	.063
length of thread — I	.0520–.2230	plus or minus	.047
	.2230–.5100	plus or minus	.063
	.5100–1.5100	plus or minus	.094
	1.5100–4.0100	plus or minus	.125
length of square — I2	.0520–1.0100	plus or minus	.031
	1.0100–4.0100	plus or minus	.063
diameter of shank — d1	.0520–.2230	minus	.0015
	.2230–.6350	minus	.0015
	.6350–1.0100	minus	.0020
	1.0100–1.5100	minus	.0020
	1.5100–2.0100	minus	.0030
	2.0100–4.0100	minus	.0030
size of square — A	.0520–.5100	minus	.004
	.5100–1.0100	minus	.006
	1.0100–2.0100	minus	.008
	2.0100–4.0100	minus	.010

Reprinted with permission from United States Cutting Tool Institute (USCTI). Published by Kennametal Inc. © 2005. All rights reserved.

Special Taps

Unless otherwise specified:

Special taps over 1.010–1.510" diameter inclusive, having 14 or more threads per inch or 1,75mm pitch and finer, and sizes over 1.510" diameter with 10 or more threads per inch or 2,5mm pitch and finer, are made to general dimensions shown in USCTI Table 303.


Special tap thread limits are determined using the formulas shown in USCTI Table 331 for Unified Inch Screw Threads and USCTI Table 341 for metric m-profile screw threads.

NOTE:

Tap sizes .395" and smaller have an external centre on the thread end (may be removed on bottoming taps). Sizes .125" and smaller have an external centre on the shank end. Sizes .224–.395" have truncated partial cone centres on the shank end (length of cone approximately 1/4 of diameter of shank). Sizes over .395" have internal centres on both the thread and shank ends.

For standard thread limits and tolerances for Unified Inch Screw Threads, see USCTI Table 327, and for metric threads, see USCTI Table 337.

For eccentricity tolerances of tap elements, see USCTI Table 317.

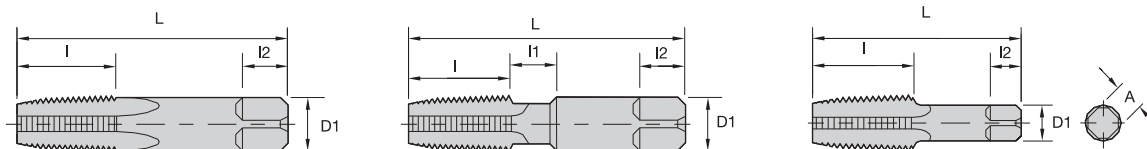

General Dimensions


nominal size (in)	dimensions (in)					
	overall length L	thread length l	square length l2	shank diameter D1	square size A	optional neck length l1
1/16	2.13	.69	.38	.3125	.234	.375
1/8	2.13	.75	.38	.3125	.234	—
1/8	2.13	.75	.38	.4375	.328	.375
1/4	2.44	1.06	.44	.5625	.421	.375
3/8	2.56	1.06	.50	.7000	.531	.375
1/2	3.13	1.38	.63	.6875	.515	—
3/4	3.25	1.38	.69	.9063	.679	—
1	3.75	1.75	.81	1.1250	.843	—
1-1/4	4.00	1.75	.94	1.3125	.984	—
1-1/2	4.25	1.75	1.00	1.5000	1.125	—
2	4.25	1.75	1.13	1.8750	1.406	—
2-1/2	5.50	2.56	1.25	2.2500	1.687	—
3	6.00	2.63	1.38	2.6250	1.968	—
3-1/2	6.50	2.69	1.50	2.8125	2.108	—
4	6.75	2.75	1.56	3.0000	2.250	—

Tolerances

element	range	direction	tolerance
length overall — L	1/16–3/4 inc.	plus/minus	.031
	1–4 inc.	plus/minus	.063
length of thread — l	1/16–3/4 inc.	plus/minus	.063
	1–1-1/4 inc.	plus/minus	.094
length of square — l2	1-1/2–4	plus/minus	.125
	1/16–3/4 inc.	plus/minus	.031
diameter of shank — d1	1–4 inc.	plus/minus	.063
	1/16–1/8	minus	.0015
size of square — a	1/4–1 inc.	minus	.0020
	1-1/4–4 inc.	minus	.0030
	1/16–1/8	minus	.004
	1/4–3/4 inc.	minus	.006
	1–4 inc.	minus	.008

Reprinted with permission from United States Cutting Tool Institute (USCTI). Published by Kennametal Inc. © 2005. All rights reserved.

American National Standard Taper Pipe Thread Form (NPT) Aeronautical National Taper Pipe Thread Form (ANPT) Dryseal American National Standard Taper Pipe Thread Form (NPTF)

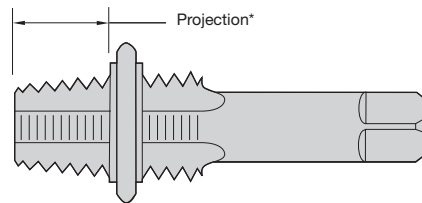

nominal size (in)	threads per inch	projection* (in)	projection tolerance + / -	taper per foot limits		length L1	tap drill size** NPT, ANPT, NPTF
				min	max		
1/16	27	.312	.063	.719	.781	.160	C
1/8	27	.312	.063	.719	.781	.1615	Q
1/4	18	.459	.063	.719	.781	.2278	7/16
3/8	18	.454	.063	.719	.781	.240	9/16
1/2	14	.579	.063	.719	.781	.320	45/64
3/4	14	.565	.063	.719	.781	.339	29/32
1	11-1/2	.678	.094	.719	.781	.400	1-9/64
1-1/4	11-1/2	.686	.094	.719	.781	.420	1-31/64
1-1/2	11-1/2	.699	.094	.719	.781	.420	1-23/32
2	11-1/2	.667	.094	.719	.781	.436	2-3/16
2-1/2	8	.925	.094	.734	.781	.682	2-39/64
3	8	.925	.094	.734	.781	.766	3-15/64
3-1/2	8	.938	.125	.734	.781	.821	—
4	8	.950	.125	.734	.781	.844	—

*Distance small end of tap projects through L1 taper thread ring gage.

**Recommended size given permits direct tapping without reaming the hole, but only gives a full thread for approximately the L1 length.


■ Pipe Taps

General-purpose pipe taps are appropriate for threading a wide variety of materials, both ferrous and non-ferrous.

Ground thread pipe taps are standard in American Standard Pipe Form (NPT) and American Standard Dryseal Pipe Form (NPTF). NPT threads require the use of a sealer, like Teflon® tape or pipe compound. Dryseal taps are used to tap fittings, which will give a pressure-tight joint without the use of a sealer.

The nominal size of a pipe tap is that of the pipe fitting to be tapped, not the actual size of the tap. The thread tapers 3/4" per foot.

All pipe taps are furnished with 2-1/2–3-1/2 thread chamfer.

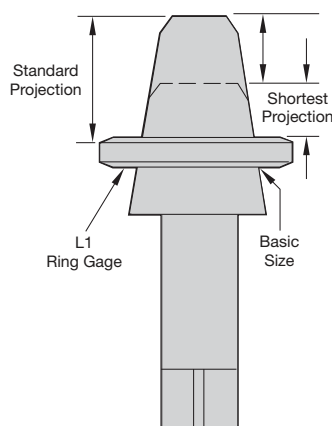


Short projection pipe taps are made with a projection shorter than standard for taper pipe tapping where the depth of tapping is limited.

Special short projection taper pipe taps can be furnished with American National Standard Taper Pipe thread (ANPT) or Dryseal American National Standard Taper Pipe thread (NPTF, PTF-SAE Short, or PTF-SPL Extra Short).

For information on short projection pipe taps and hole preparation for NPT, NPTF, and ANPT internal pipe threads, consult WIDIA-GTD Technical Bulletins.


Special short projection pipe taps and left-hand pipe taps are available through Lightning Service.

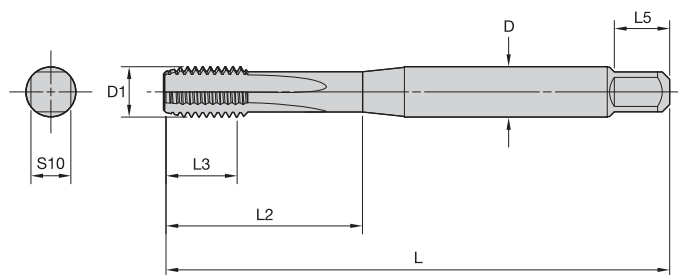

■ DIN 371

metric dimensions


machine screw size number	nominal fraction diameter (in)	D	L	L3	L2	L5	S10
4	—	3,5	56	8	18	6	2,7
5	—	4,0	56	9	20	6	3,0
6	—	4,0	56	9	20	6	3,0
8	—	4,5	63	11	21	6	3,4
10	—	6,0	70	12	25	8	4,9
—	1/4	7,0	80	15	30	8	5,5
—	5/16	8,0	90	15	35	9	6,2
—	3/8	10,0	100	19	39	11	8,0

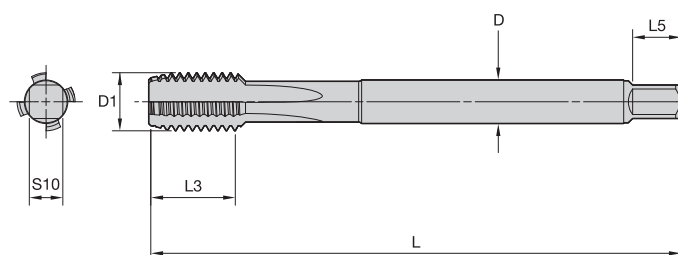

■ DIN 376

metric dimensions

nominal fraction diameter (in)	D	L	L3	L5	S10
7/16	8	100	18	9	6,2
1/2	9	110	23	10	7,0
9/16	11	110	25	12	9,0
5/8	12	110	24	12	9,0
3/4	16	140	30	15	12,0
7/8	18	140	34	17	14,5
1	18	160	38	17	14,5

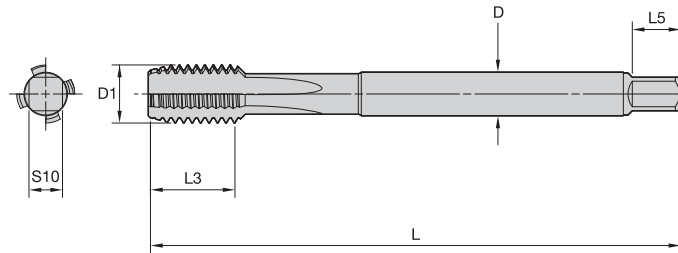

DIN 374


D1	pitch		metric dimensions				
	minimum	maximum	D	L	L3*	L5	S10
M8	0.2	0.75	6	80	18	8	4.9
M8	—	1	6	90	22	8	4.9
M9	0.2	0.75	7	80	18	8	5.5
M9	—	1	7	90	22	8	5.5
M10	0.2	1	7	90	20	8	5.5
M10	—	1.25	7	100	24	8	5.5
M11	0.35	1	8	90	20	9	6.2
M12	0.35	1.5	9	100	22	10	7
M14	0.35	1.5	11	100	22	12	9
M16	0.35	1.5	12	100	22	12	9
M16	—	2	12	110	32	12	9
M18	0.35	1.5	14	110	25	14	11
M18	—	2	14	125	34	14	11
M20	0.35	1.5	16	125	25	15	12
M20	—	2	16	140	34	15	12
M22	0.35	1.5	18	125	25	17	14.5
M22	—	2	18	140	34	17	14.5
M24	0.35	2	18	140	28	17	14.5
M27	0.35	2	20	140	28	19	16
M30	0.35	2	22	150	28	21	18
M30	—	3	22	180	45	21	18

* Maximum

Need More Information about WIDIA™ products?

For more information regarding WIDIA's Turning, Milling, and Tooling Systems products, please refer to the WIDIA Advances 2014 catalogue. Contact your local Authorised WIDIA Distributor, or visit us today at www.widia.com.




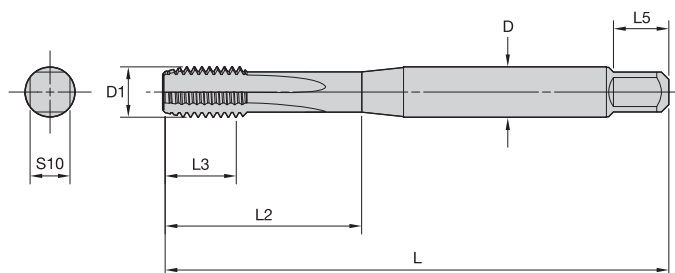

■ JIS Type 2 Metric Coarse

metric dimensions

D1	pitch	D	L	L3	L2	L5	S10
M3	0.5	4	46	11	19	6	3.2
M3.5	0.6	4	48	13	20	6	3.2
M4	0.7	5	52	13	21	7	4
M4.5	0.75	5	55	13	21	7	4
M5	0.8	5.5	60	16	24	7	4.5
M6	1	6	62	19	29	7	4.5

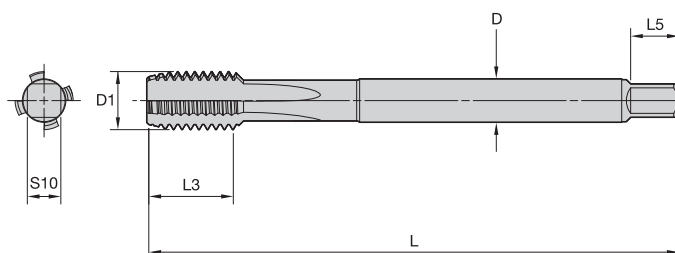

■ JIS Type 3 Metric Coarse

metric dimensions


D1	pitch	D	L	L3	L5	S10
M8	1.25	6.2	70	22	8	5
M9	1.25	7	72	22	8	5.5
M10	1.5	7	75	24	8	5.5
M11	1.5	8	80	25	9	6
M12	1.75	8.5	82	29	9	6.5
M14	2	10.5	88	30	11	8
M16	2	12.5	95	32	13	10
M18	2.5	14	100	37	14	11
M20	2.5	15	105	37	15	12
M22	2.5	17	115	38	16	13
M24	3	19	120	45	18	15

**Through Holes
Push Chips**



- GUN™ (spiral point) or LHSF (Left-Hand Spiral Flute).
- Ideal for materials with long chips.

**Blind Holes
Pull Chips**




- RHSF (Right-Hand Spiral Flute).
- Ideal for materials with long chips.

**Blind or Through Holes
Store Chips**


- STFL (Straight Flute).
- Ideal for materials with short chips.

**Blind or Through Holes
No Chips**


- Forming.
- Ideal for ductile materials <32 HRC.

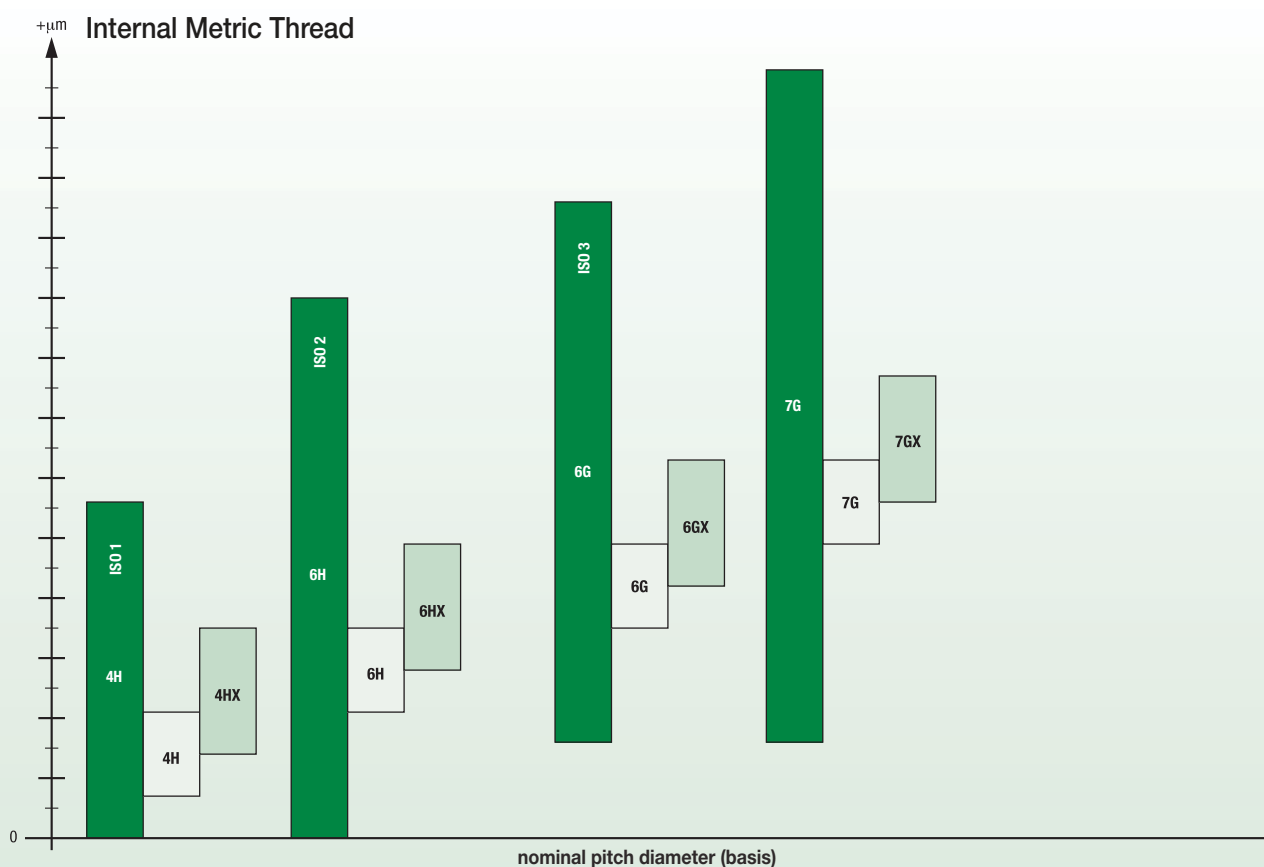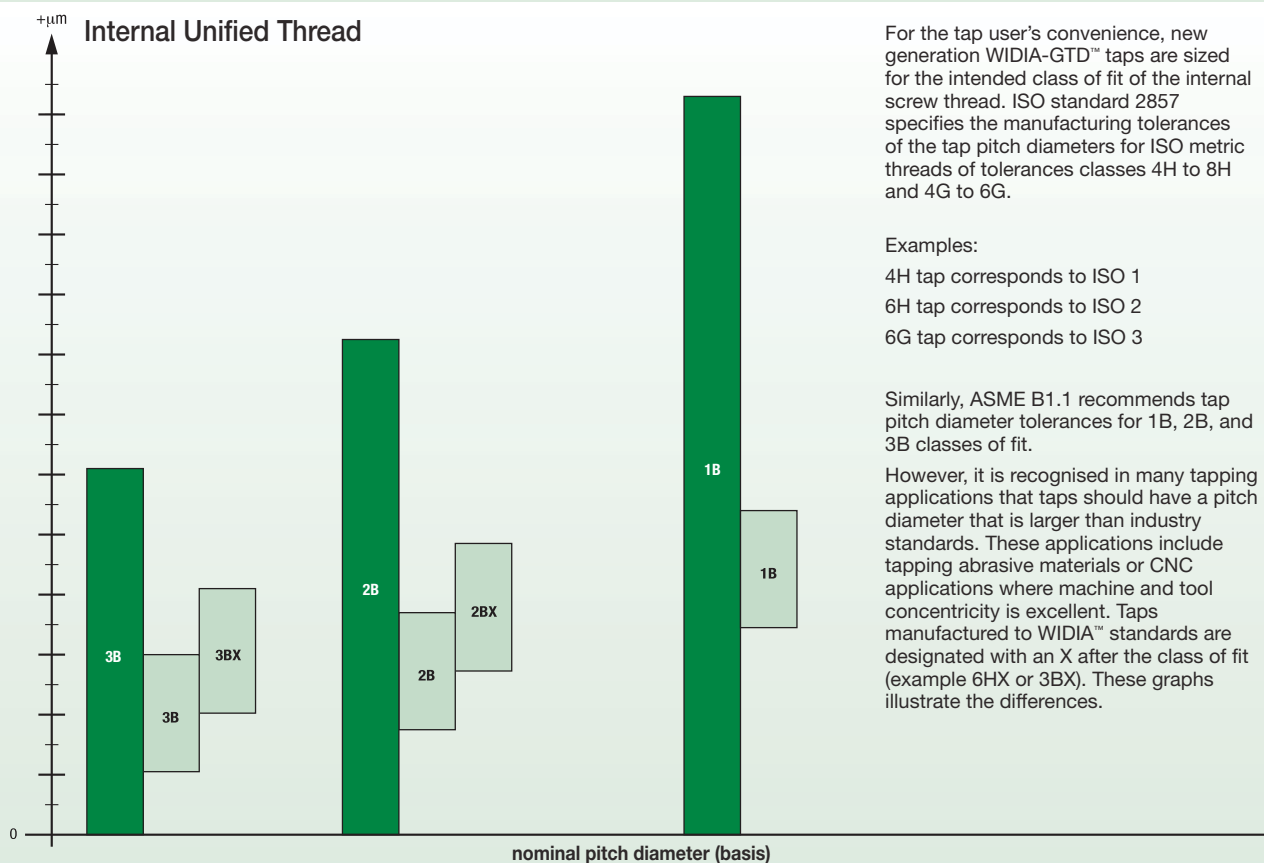

Fast response and superior performance when you need it.

The WIDIA™ Products Group provides exceptional application and design engineering services. Whether you need tools produced according to a blueprint, a finished part, or a drawing; assistance in process development; or expertise in optimising an application, our world-renowned Advanced Engineering Team is available.

Our engineering departments are fully integrated with specialised production cells located in our focused factories throughout the world. ISO Certified manufacturing facilities with state-of-the-art CNC equipment, simulation capability, CAD/CAM production, and inspection processes ensure that customers receive the highest-quality product with accurate compliance to specifications and repeatability for future production.



Custom Solution Services

- Blueprint specials
- Complex geometries
- Form tools
- Modified standards
- Application engineering and optimisation
- Tool design
- Project development

To learn more about our innovations, contact your local Authorised Distributor or visit www.widia.com.

It is generally recognised that, in mass production, it is impossible to reproduce in exact detail the theoretically perfect product as laid out on the drawing board. The allowed slight variation between the theoretically perfect product drawing and each unit of the actual product is called the tolerance.

Allowance

An intentional difference in correlated dimensions of mating parts. It is the minimum clearance or maximum interference between such parts.

Angle of Thread

The angle included between the flanks of the thread measured in an axial plane

Half Angle of Thread

The angle included between a flank of the thread and the normal (90°) to the axis, measured in an axial plane.

Lead of Thread

The distance a screw thread advances axially in one turn. On a single-thread screw, the lead and pitch are identical. On a double thread, the lead is 2x pitch; on a triple thread, the lead is 3x pitch, etc.

Major Diameter

The largest diameter of a straight-screw thread.



Minor Diameter

The smallest diameter of a straight-screw thread.

Pitch

The distance from a point on a screw thread to a corresponding point on the next thread measured parallel to the axis.


The pitch in inches = $\frac{1}{\text{number of threads per inch}}$

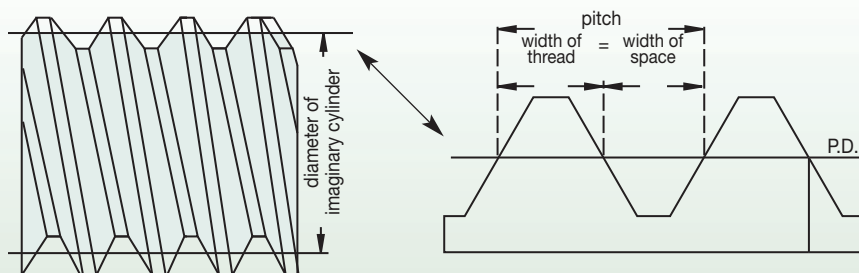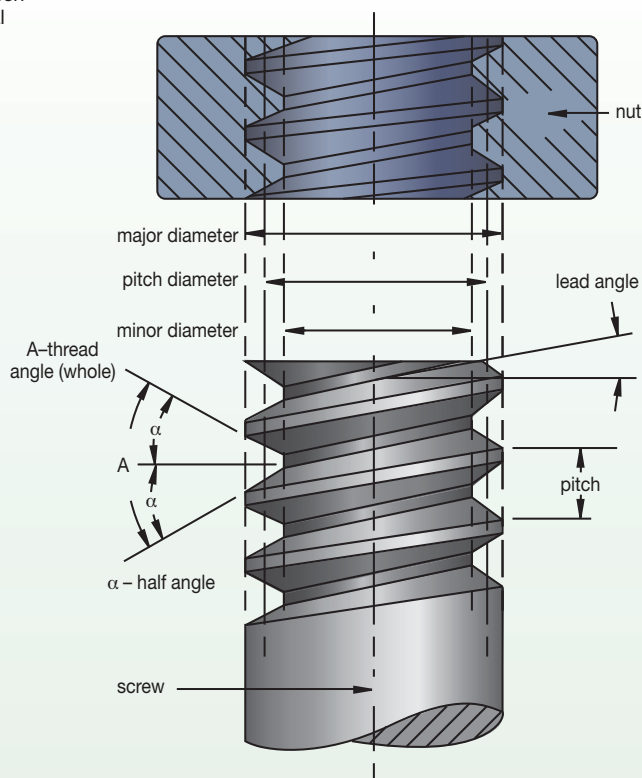

Pitch Diameter

On a straight-screw thread, the diameter of an imaginary cylinder that would pass through the threads at such points as to make equal the width of the threads and the width of the spaces cut by the surface of the cylinder.


A thread system is available for aerospace and other applications where high fatigue strength is required. The UNJ thread form is defined by ASME B1.15 and is similar to Military Specification MIL-S-8879. Screw thread assemblies consist of external and internal threads. In order to minimise the stress on the external UNJ thread, a controlled root radius is required that is equal to $0.15011P$ to $0.18042P$, where P is the thread pitch. Internal UNJ threads are not required to have a radius at either the major or minor diameters.

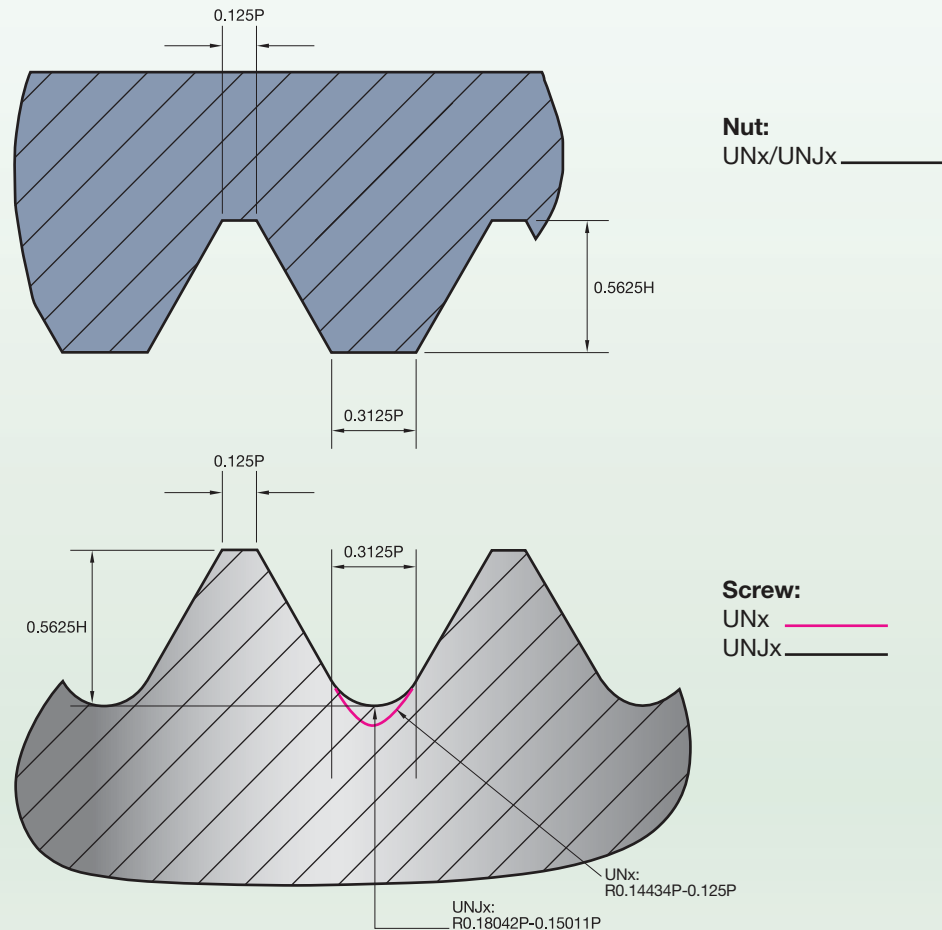

Because external UNJ threads must be produced with a defined root radius, standard UN tooling may not be used. However, internal UNF threads may be produced with ground thread UN taps sized to produce the proper class of fit. The tap does not need to be marked with a letter J. Attention must be paid to the tap drill since the minor diameter has to be specified so as to provide clearance with the root radius on the external thread.

For UNJ thread specifications, the reader is referred to ASME B1.15. Please note this standard includes Class 3 and Class 2 UNJ screw threads. However, only Class 3 UNJ threads meet the requirements of Military Specification MIL-S-8879. For Unified Inch (UN) thread specifications, refer to ASME B1.1.

Unlike cutting taps, which remove material, forming taps generate an internal screw thread by displacing material and forming it into the V-shaped thread. A common misconception is that a thread rolling action occurs. Instead, the threads are formed over the tapered entry section of the tap as the tap rotates into the hole. A succession of deeper penetrating lobes over the entry plastically displaces material radially between the tap's thread flanks until the entry length is reached. At this point, the thread is fully formed at the correct thread height.

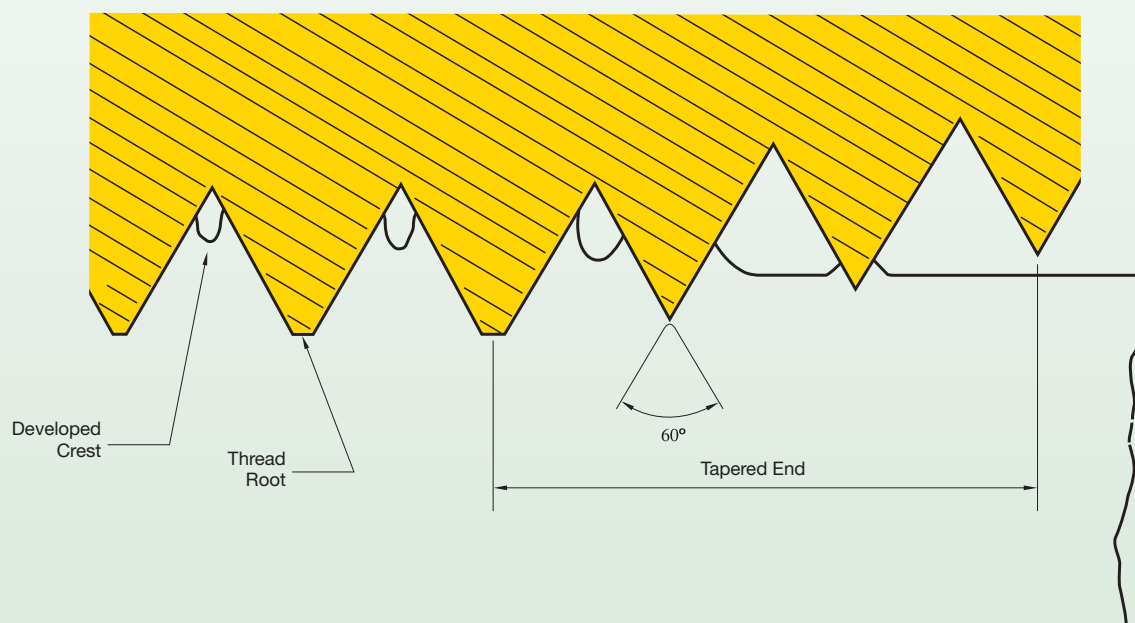

Forming taps have numerous advantages over cutting taps. The most obvious advantage is that forming taps do not create chips. There are no chip removal problems. Bird nesting is a situation that occurs when chips wrap around the shank of spiral fluted taps when tapping blind holes in long chipping materials. Forming taps help this to be avoided. Since forming taps avoid this problem, they are stronger and more resistant to breakage. Another misconception is that forming taps produce stronger threads. Although the forming process strain hardens the thread flanks, it has very little effect on the major diameter, the location where internal threads strip.

Forming taps can only be used in ductile materials. Due to increased friction relative to cutting, forming taps require higher torque than cutting taps. In some situations, oil-based lubrications are required, and this might not be convenient on CNC machining centers that use water soluble coolant. In this situation, the lubricant concentration should be increased.

Since forming taps displace material, larger diameter pre-tap holes are required. This is especially important when converting from cutting taps to forming taps. If a cutting tap hole size is used, the displaced material will over-fill the tap's threads and breakage will result. Please consult hole size charts for forming taps.

Factors when trying to determine the best tapping speeds:

- Material to be tapped
- Length of chamfer on tap
- Percentage of full thread to be cut
- Length of hole (depth of thread)
- Pitch of thread
- Cutting fluids
- Machine equipment
- Horizontal or vertical tapping

The best and most efficient operating speeds for taps cannot be calculated with the same certainty, as for many other metalcutting tools.

With other tools, the feed per revolution can be set at any desired point and can be varied as conditions demand. Taps, on the other hand, must always be advanced at a rate equal to one pitch for every revolution. The style of tap may vary the conditions.

For example, with a bottoming tap, the first thread on each land cuts the full height of thread, while, with a taper or starting tap, a number of threads do their share of the cutting before the full height of thread is reached.

The depth of thread also varies, depending on the pitch.

The coarser the thread, the greater the advance of the tap per revolution and the greater the amount of material removed.

The method of feeding the tap, and the type of equipment for driving, also influences the permissible speeds. If taps are mechanically fed at the proper rate of advance, they can be operated at higher speeds than if they are required to feed themselves and pull some part of the machine along with them.

Speeds may be modified to take into account any or all of these factors:

- Speeds must be lowered as length of thread increases because, in deep thread holes, the accumulated chips increase friction and interfere with lubrication.
- Bottoming taps must be run slower than plug taps.
- Tapping full height of thread calls for slower speed than if the commercial 75% height only is required.
- Coarse-thread taps in the larger diameters should be run more slowly than fine-thread taps of the same diameters.
- The quantity and quality of cutting fluid may affect the permissible speeds as much as 100%.
- Taper threaded taps, such as pipe taps, should be operated from 1/2–3/4 the speed of a straight thread tap of comparable major diameter.

■ RPM Formulas

SFM = Surface Feet per Minute

RPM = Revolutions per Minute

IPM = Inches per Minute

TPI = Threads per Inch

S m/m = Surface Metres per Minute

$\pi = 3.1416$

mm/min = millimetres per minute

P = Pitch (1/number of threads per inch)

Inch Sizes

$$\text{SFM} = \frac{\text{RPM} \times \text{tool diameter}}{3.82} \quad \text{or} \quad 0.26 \times \text{RPM} \times \text{tool diameter}$$

$$\text{RPM} = \frac{3.82 \times \text{SFM}}{\text{tool diameter}}$$

$$\text{IPM} = \frac{\text{RPM}}{\text{TPI}^*} \quad \text{or} \quad *P \times \text{RPM}$$

Metric Sizes

$$\text{S m/m} = \frac{\pi \times \text{tool diameter} \times \text{RPM}}{1000}$$

$$\text{RPM} = \frac{\text{mm/m} \times 1000}{\pi \times \text{tool diameter}}$$

$$\text{mm/min} = \text{mm P} \times \text{RPM}$$

Partial List of Solutions to Tapping Problems

application	symptom	common cause	remedy
general	gage out of limits	tap size and gage mismatch	select tap size for gage
	oversize thread	alignment, spindle feed	correct
	oversize at top	runout or alignment	correct
	go gage binds part way	worn tool, tap cuts off lead	replace tap, synchronous holder
	thread shaving	feed error, high axial force	program, synchronous holder
	chipping	high cutting force, worn tap	tap geometry, replace tap
	breakage	chip jamming flutes	tap geometry, tapping depth
	—	worn tool, high torque	replace tap with new tool
	short life, low speed	excessive wear	SC or HSS-E-PM HP taps
steel	birdnest blind hole	long, ductile chips	GT30 GP6505 (oxide), peck feed
	chipping	high material hardness	GT00, GT02 WP31MG (TiN)
	breakage in blind holes	hole depth >2D, chip jamming	GT04 WH36MG (TiN/MoS ₂)
stainless steel	oversize thread, low life	galling	GT20, GT30 GM6515 (TiN-CrC/C)
	short life	work hardened core hole	replace drill
cast iron	excessive wear	abrasion	GT40 GP6520 (TiCN)
aluminium, cast	excessive wear	high silicon	GT40 GP6520 (TiCN)
aluminium, wrought	oversize thread	galling	GT70, GT80 WN48EG (DLC)
nickel, cobalt alloys	short life	high cutting temperature	GT10, GT12 WS32MG (TiCN)
titanium	short life	high cutting temperature	GT14, GT16 WN35MG (TiN-DLC)

Thread Mills

	vibration marks	major crest wear	edge chipping	cone shaped thread	entry marks
cutting speed	check	reduce	—	—	—
feed per tooth	check	increase	reduce	—	—
workpiece clamping	improve	improve	improve	—	improve
machine tool stability	improve	improve	improve	—	improve
cantilever arm	shorten	shorten	—	—	shorten
helix angle	increase	reduce	—	—	—
radial runout	check	check	—	—	—
coating	—	improve	improve	—	—
milling operation	—	climb mill	climb mill	climb mill	—
line feed/ entry ramp	check	check	—	—	improve
coolant pressure	—	check (>20 bar, 290 psi)	check (>20 bar, 290 psi)	—	—

drill size	decimal (in)	drill size	decimal (in)	drill size	decimal (in)	drill size	decimal (in)	drill size	decimal (in)	drill size	decimal (in)
0,30mm	.0118	54	.0550	3,10mm	.1220	5,50mm	.2165	8,50mm	.3346	9/16	.5625
0,32mm	.0126	1,40mm	.0551	1/18	.1250	7/32	.2188	8,60mm	.3386	14,50mm	.5709
80	.0135	1,45mm	.0571	3,20mm	.1260	5,60mm	.2205	R	.3390	37/64	.5781
0,35mm	.0138	1,50mm	.0591	30	.1285	2	.2210	8,70mm	.3425	14,75mm	.5807
79	.0145	53	.0595	3,30mm	.1299	5,70mm	.2244	11/32	.3438	15,00mm	.5906
0,38mm	.0150	1,55mm	.0610	3,40mm	.1339	1	.2280	8,80mm	.3465	19/32	.5938
1/64	.0156	1/16	.0625	29	.1360	5,80mm	.2283	S	.3480	15,25mm	.6004
0,40mm	.0157	1,60mm	.0630	3,50mm	.1378	5,90mm	.2323	8,90mm	.3504	39/64	.6094
78	.0160	52	.0635	28	.1405	A	.2340	9,00mm	.3543	15,50mm	.6102
0,42mm	.0165	1,65mm	.0650	9/64	.1406	15/64	.2344	T	.3580	15,75mm	.6201
0,45mm	.0177	1,70mm	.0669	3,60mm	.1417	6,00mm	.2362	9,10mm	.3583	5/8	.6250
77	.0180	51	.0670	27	.1440	B	.2380	23/64	.3594	16,00mm	.6299
0,48mm	.0189	1,75mm	.0689	3,70mm	.1457	6,10mm	.2402	9,20mm	.3622	16,25mm	.6398
0,50mm	.0197	50	.0700	26	.1470	C	.2420	9,30mm	.3661	41/64	.6406
76	.0200	1,80mm	.0709	25	.1495	6,20mm	.2441	U	.3680	16,50mm	.6496
75	.0210	1,85mm	.0728	3,80mm	.1496	D	.2460	9,40mm	.3701	21/32	.6562
0,55mm	.0217	49	.0730	24	.1520	6,30mm	.2480	9,50mm	.3740	16,75mm	.6594
74	.0225	1,90mm	.0748	3,90mm	.1535	1/4, E	.2500	3/8	.3750	17,00mm	.6693
0,60mm	.0236	48	.0760	23	.1540	6,40mm	.2520	V	.3770	43/64	.6719
73	.0240	1,95mm	.0768	5/32	.1562	6,50mm	.2559	9,60mm	.3780	17,25mm	.6791
0,62mm	.0244	5/64	.0781	22	.1570	F	.2570	9,70mm	.3819	11/16	.6875
72	.0250	47	.0785	4,00mm	.1575	6,60mm	.2598	9,80mm	.3858	17,50mm	.6890
0,65mm	.0256	2,00mm	.0787	21	.1590	G	.2610	W	.3860	45/64	.7031
71	.0260	2,05mm	.0807	20	.1610	6,70mm	.2638	9,90mm	.3898	18,00mm	.7087
0,70mm	.0276	46	.0810	4,10mm	.1614	17/64	.2656	25/64	.3906	23/32	.7188
70	.0280	45	.0820	4,20mm	.1654	H	.2660	10,00mm	.3937	18,50mm	.7283
69	.0292	2,10mm	.0827	19	.1660	6,80mm	.2677	X	.3970	47/64	.7344
0,75mm	.0295	2,15mm	.0846	4,30mm	.1693	6,90mm	.2717	10,20mm	.4016	19,00mm	.7480
68	.0310	44	.0860	18	.1695	I	.2720	Y	.4040	3/4	.7500
1/32	.0312	2,20mm	.0866	11/64	.1719	7,00mm	.2756	13/32	.4062	49/64	.7656
0,80mm	.0315	2,25mm	.0886	17	.1730	J	.2770	Z	.4130	19,50mm	.7677
67	.0320	43	.0890	4,40mm	.1732	7,10mm	.2795	10,50mm	.4134	25/32	.7812
66	.0330	2,30mm	.0906	16	.1770	K	.2810	27/64	.4219	20,00mm	.7874
0,85mm	.0335	2,35mm	.0925	4,50mm	.1772	9/32	.2812	10,80mm	.4252	51/64	.7969
65	.0350	42	.0935	15	.1800	7,20mm	.2835	11,00mm	.4331	20,50mm	.8071
0,90mm	.0354	3/32	.0938	4,60mm	.1811	7,30mm	.2874	7/16	.4375	13/16	.8125
64	.0360	2,40mm	.0945	14	.1820	L	.2900	11,20mm	.4409	21,00mm	.8268
63	.0370	41	.0960	4,70mm, 13	.1850	7,40mm	.2913	11,50mm	.4528	53/64	.8281
0,95mm	.0374	2,45mm	.0965	3/16	.1875	M	.2950	29/64	.4531	27/32	.8438
62	.0380	40	.0980	4,80mm, 12	.1890	7,50mm	.2953	11,80mm	.4646	21,50mm	.8465
61	.0390	2,50mm	.0984	11	.1910	19/64	.2969	15/32	.4688	55/64	.8594
1,00mm	.0394	39	.0995	4,90mm	.1929	7,60mm	.2992	12,00mm	.4724	22,00mm	.8661
60	.0400	38	.1015	10	.1935	N	.3020	12,20mm	.4803	7/8	.8750
59	.0410	2,60mm	.1024	9	.1960	7,70mm	.3031	31/64	.4844	22,50mm	.8858
1,05mm	.0413	37	.1040	5,00mm	.1969	7,80mm	.3071	12,50mm	.4921	57/64	.8906
58	.0420	2,70mm	.1063	8	.1990	7,90mm	.3110	1/2	.5000	23,00mm	.9055
57	.0430	36	.1065	5,10mm	.2008	5/16	.3125	12,80mm	.5039	29/32	.9062
1,10mm	.0433	7/64	.1094	7	.2010	8,00mm	.3150	13,00mm	.5118	59/64	.9219
1,15mm	.0453	35	.1100	13/64	.2031	O	.3160	33/64	.5156	23,50mm	.9252
56	.0465	2,80mm	.1102	6	.2040	8,10mm	.3189	13,20mm	.5197	15/16	.9375
3/64	.0469	34	.1110	5,20mm	.2047	8,20mm	.3228	17/32	.5312	24,00mm	.9449
1,20mm	.0472	33	.1130	5	.2055	P	.3230	13,50mm	.5315	61/64	.9531
1,25mm	.0492	2,90mm	.1142	5,30mm	.2087	8,30mm	.3268	13,80mm	.5433	24,50mm	.9646
1,30mm	.0512	32	.1160	4	.2090	21/64	.3281	35/64	.5469	31/32	.9688
55	.0520	3,00mm	.1181	5,40mm	.2126	8,40mm	.3307	14,00mm	.5512	25,00mm	.9843
1,35mm	.0531	31	.1200	3	.2130	Q	.3320	14,25mm	.5610	63/64	.9844
										1"	1.0000

■ Metric
 ■ Fractional
 ■ Wire gage
 ■ Letter size

Knowing the hardness of the work material to be tapped is essential in selecting the best tap for the job.

10 mm/min ball 3000 kg	120° cone 150 kg	1/16" ball 100 kg	model C	1000 lb per sq. in.	10 mm/min ball 3000 kg	120° cone 150 kg	1/16" ball 100 kg	model C	1000 lb per sq. in.
Brinell	Rockwell C	Rockwell B	Shore Scleroscope	tensile strength	Brinell	Rockwell C	Rockwell B	Shore Scleroscope	tensile strength
800	72	—	100	—	276	30	105	42	136
780	71	—	99	—	269	29	104	41	132
760	70	—	98	—	261	28	103	40	129
745	68	—	97	367	258	27	102	39	127
725	67	—	96	357	255	26	102	39	125
712	66	—	95	350	249	25	101	38	123
682	65	—	93	337	245	24	100	37	119
668	64	—	91	326	240	23	99	36	117
652	63	—	89	318	237	23	99	35	115
626	62	—	87	306	229	22	98	34	113
614	61	—	85	299	224	21	97	33	110
601	60	—	83	292	217	20	96	33	107
590	59	—	81	290	211	19	95	32	104
576	57	—	79	281	206	18	94	32	102
552	56	—	76	270	203	17	94	31	100
545	55	—	75	268	200	16	93	31	98
529	54	—	74	259	196	15	92	30	96
514	53	120	72	254	191	14	92	30	94
502	52	119	70	247	187	13	91	29	92
495	51	119	69	244	185	12	91	29	91
477	49	118	67	233	183	11	90	28	90
461	48	117	66	227	180	10	89	28	89
451	47	117	65	223	175	9	88	27	86
444	46	116	64	219	170	7	87	27	84
427	46	115	62	209	167	6	87	27	82
415	44	115	60	204	165	5	86	26	81
401	43	114	58	196	163	4	85	26	80
388	42	114	57	191	160	3	84	25	78
375	41	113	55	184	156	2	83	25	76
370	40	112	54	182	154	1	82	25	75
362	39	111	53	179	152	—	82	24	74
351	38	111	51	173	150	—	81	24	74
346	37	110	50	170	147	—	80	24	72
341	37	110	49	168	145	—	79	23	71
331	36	109	47	163	143	—	79	23	70
323	35	109	46	158	141	—	78	23	69
311	34	108	46	153	140	—	77	22	69
301	33	107	45	148	135	—	75	22	67
293	32	106	44	144	130	—	72	22	65
285	31	105	43	140	—	—	—	—	—

material number	DIN EN - D	AFNOR - F	BS - UK	JIS
0.6010	GG10	—	Grade 100	FC 100
0.6015	GG15	FGL 150	Grade 150	FC 150
0.6020	GG20	FGL 200	Grade 220	FC 200
0.6025	GG25	FGL 250	Grade 250, 260	FC 250
0.6030	GG30	FGL 300	Grade 300	FC 300
0.6035	GG35	FGL 350	Grade 350	FC 350
0.6655	—	L-NUC 15 6 2	F1	—
0.6656	—	L-NUC 15 6 3	F1	—
0.6660	—	L-NC 20 2	F2	—
0.6661	—	L-NC 20 3	F2	—
0.6676	—	L-NC 30 3	F3	—
0.7040	GGG40	FGS 400-15	Grade 420/12	FCD 400
0.7043	GGG40.3	FGS 370-17	Grade 370/12	FCD 370
0.7050	GGG50	FGS 500-7	Grade 500/7	FCD 500
0.7060	GGG60	FGS 600-3	Grade 600/3	FCD 600
0.7070	GGG70	FGS 700-2	Grade 700/2	FCD 700
0.7080	GGG80	FGS 800-2	Grade 800/2	FCD 800
0.7652	—	S-NM 13 7	S 6	—
0.7660	—	S-NC 20 2	S 2	—
0.7661	—	S-NC 20 3	S 2	—
0.7670	—	S-N 22	S 2 C	—
0.7673	—	S-NM 23 4	S 2 M	—
0.7676	—	S-NC 30 3	S 3	—
0.7677	—	S-NC 30 1	S 3	—
0.8035	GTW35	MB 35-7	W 35-04	FCMW 330
0.8038	—	MB 380-12	—	—
0.8040	GTW40	MB 400-5	W 40-05	FCMW 370
0.8045	GTW45	MB 450-7	W 45-07	FCMWP 440
0.8135	GTS35	MN 350-10	B 35-12	FCMB 340
0.8145	GTS45	MP 50-5	P 45-06	—
0.8155	GTS55	MP 60-3	P 55-04	—
0.8165	GTS65	—	P 65-02	FCMP 540
0.8170	GTS70	MP 70-2	P 70-02	FCMP 690
0.9620	G-X 260 NiCr 4-2	—	Grade 2 A	—
0.9625	G-X 330 NiCr 4-2	—	Grade 2 B	—
0.9630	G-X 300 CrNiSi 9-5-2	—	Grade 2 C, D, E	—
0.9635	G-X 300 CrMo 15-3	—	Grade 3 A, B	—
0.9640	G-X 300 CrMoNi 15-2-1	—	Grade 3 A, B	—
0.9645	G-X 260 CrMoNi 20-2-1	—	Grade 3 C	—
0.9650	G-X 260 Cr 27	—	Grade 3 D	—
0.9655	G-X 300 CrMo 27-1	—	Grade 3 E	—
0.xxx	GGV - 30	—	—	FCV 300
0.xxx	GGV - 40	—	—	FCV 400
1.0301	C 10	XC 10	045 M 10040 A 10	S 10 C
1.0401	C 15	XC 12, XC 18	080 M 15	S 15 C
1.0402	C 22	1 C 22, XC 18, XC 25	1 C 22, 070 M 20	S 20 C, S 2 C
1.0406	C 25	1 C 25	070 M 26	S 25 C
1.0501	C 35	XC 38, 1 C 35	080 M 36, 1 C 35	S 35 C
1.0503	C 45	1 C 45, XC 48 H 1	1 C 45, 080 M 46	S 45 C
1.0511	C 40	1 C 40, XC 42 H 1	080 M 40, 1 C 40	S 40 C
1.0528	C 30	—	1 C 30, XC 32	S 30 C
1.0535	C 55	1 C 55, XC 55 H 1	1 C 55, 070 M 55	S 55 C
1.0540	C 50	1 C 50	1 C 50, 080 M50	S 50 C
1.0570	S355J2G3	E 36-3, E 36-4	Fe 510 D1 FF, 50/35	SM 490 L, SM 520 B
1.0601	C 60	1 C 60, AF 70 C 55	1 C 60, 080 A 67	S 58 C
1.0715	9 SMn 28	S 250	080 M 15, 230 M 07	SUM 22
1.0718	9 SMnPb 28	S 250 Pb	—	SUM 22 L, SUM 23 L
1.0721	10 S 20	13 MF 4, 10 F 1	210 M 15	—
1.0722	10 SPb 20	CC 10 Pb, 10 PbF 2	—	SUM 12
1.0726	35 S 20	35 MF 6	212 M 36	SUM 41
1.0727	45 S 20	45 MF 61, 45 MF 4	212 M 36	SUM 42
1.0728	60 S 20	—	—	—
1.0736	9 SMn 36	S 300	240 M 07	SUM 25
1.0737	9 SMnPb 36	S 300 Pb	—	SUM 24 L
1.1121	Ck 10 (C 10 E)	XC 10	045 M 10, 040 A 10	S 9 CK, S 10 C
1.1141	Ck 15 (C 15 E)	XC 12, XC 15	080 M 15, 040 A 15	S 15, S 15 Ck
1.1151	C 22 E	2 C 22, XC 18/25	055 M 15	S 20 C, S 20 CK, S 22 C
1.1157	40 Mn 4	35 M 5, 40 M 5	150 M 36	—
1.1158	C 25 E	2 C 25, XC 25	070 M 26	S 25 C, S 28 C

UNI - I	UNE - E	AISI - US	condition	material group
G 10	FG 10	Class 20 B	U	15
G 15	FG 15	Class 25 B	U	15
G 20	FG 20	Class 30 B	U	16
G 25	FG 25	Class 40 B	U	16
G 30	FG 30	Class 45 B	U	16
G 35	FG 35	Class 50 B	U	16
—	—	—	GG/AU	17
—	—	—	GG/AU	17
—	—	—	GG/AU	17
—	—	—	GG/AU	18
—	—	—	GG/AU	31
GS 400-12	—	Grade 60-40-18	U	17
—	—	—	U	17
GS 500-7	—	Grade 65-45-12	U	17
GS 600-3	—	Grade 80-55-06	U	18
GS 700-2	—	Grade 100-70-03	U	18
GS 800-2	—	Grade 120-90-02	U	18
—	—	—	GGG/AU	17
—	—	—	GGG/AU	17
—	—	—	GGG/AU	18
—	—	—	GGG/AU	17
—	—	—	GGG/AU	17
—	—	—	GGG/AU	31
—	—	—	GGG/AU	31
—	—	—	G	20
W 38-12	—	—	G	19
W 40-05	—	—	G	19
W 45-07	—	—	G	19
B 35-10	Type A	Grade 22010, 32510	G	19
P 45-06	Type E	—	G	19
P 55-04	Type C	—	G	20
P 65-02	—	—	G	20
P 70-02	—	—	G	20
—	—	—	GO	40
—	—	—	GO	40
—	—	—	GO	40
—	—	—	GO	40
—	—	—	GO	40
—	—	—	GO	40
—	—	—	GO	40
—	—	—	GO	40
—	—	—	GO	17
—	—	—	GO	18
C 10	F. 1511	1010	—	1
C 15, C 16	F. 111	1015	—	1
1 C 22, C 20, C 21	1 C 22, F. 112	1020, 1023	—	1
C 25, 1 C 25	—	1025	var ¹	2-3
C 35, 1 C 35	1 C 35, F. 113	1035	var ¹	2-3
C 45, 1 C 45	1 C 45, F. 114	1045	var ¹	2-3
1 C 40	1 C 40, F. 114.A	1040	var ¹	2-3
1 C 30	1 C 30	1030	var ¹	2-3
C 55, 1 C 55	1 C 55	1055	var ¹	4-5
1 C 50	1 C 50	1050	var ¹	2-3
Fe 510 C FN	AE 355 D, Fe 510 D1 FF	—	—	2
C 60, 1 C 60	1 C 60	1060	var ¹	4-5
CF 9 SMn 28, CF 9 M 07	F. 2111	1213	1	—
CF 9 SMnPb 28	F. 2112	12 L 14, 12 L 13	—	1
CF 10 S 20	F. 2121	1102, 1108, 1109	—	1
CF 10 SPb 20	F. 2122	1108, 11 L 08	—	1
CF 35 SMn 10	F. 2131, F. 210.G	1141, 1140	var ¹	2-3
CF 44 SMn 28	F. 2133	1146	var ¹	2-3
—	—	1151	var ¹	4-5
CF 9 SMn 36	F. 2113	1215	—	1
CF 9 SMnPb 36	F. 2114	12 L 14	—	1
C10, 2 C 10	F. 1510, C 10 k	1010	—	1
C 15, C 16	F. 1110, F. 1511	1015	—	1
C 20, C 25	F. 1120	1020, 1023	—	1
—	—	1035, 1041	var ¹	2-3
C 25	F. 1120	1025	var ¹	2-3

material number	DIN EN - D	AFNOR - F	BS - UK	JIS
1.1170	28 Mn 6	28 Mn 6, 35 M 5	28 Mn 6, 150 M 19	SMn 433
1.1178	C 30 E	—	2 C 30, XC 32	S 30 C
1.1181	C 35 E	2 C 35, XC 38 H 1	080 M 36	S 35 C
1.1183	Cf 35	XC 42 TS	080 A 35	S 35 C
1.1186	C 40 E	2 C 40, XC42 H 1	2 C 40, 080 M 40	S 40 C
1.1191	C 45 E	XC 48 H 1, 2 C 45	2 C 45, 080 M 46	S 45 C
1.1193	Cf 45	XC 42 TS	060 A 47	S 45 C
1.1203	C 55 E	2 C 55, XC 55 H 1	2 C 55, 070 M 55	S 55 C
1.1206	C 50 E	2 C 50	2 C 50, 080 M 50	S 50 C
1.1213	Cf 53	42 M 4 TS	060 A 57	S 50 C
1.1221	C 60 E	2 C 60	2 C 60, 060 A 62	S 58 C
1.2241	51 CrV 4	50 CV 4	735 A 51	SUP 10
1.2369	81 MoCrV 42-16	—	—	—
1.3505	100 Cr 6	100 C 6	535 A 99	SUJ 2
1.3520	100 CrMn 6	—	535 A 99	SUJ 3
1.3533	17 NiCrMo 14	16 NCD 13	—	—
1.3536	100 CrMo 7-3	—	—	—
1.3537	100 CrMo 7	100 CD 7	—	SUJ 4
1.3541	X 45 Cr 13	—	—	—
1.3543	X 102 CrMo 17	Z 100 CD 17	—	SUS440 C
1.3551	80 MoCrV 42-16	80 DCV 40	—	—
1.3553	X 82 WMoCrV 6-5-4	Z 85 WDCV 6	BM 2	SKH 51
1.3558	X 75 WCrV 18-4-1	—	BT 1	SKH 2
1.4000	X 6 Cr 13	Z 6 C 13	403 S 17	SUS 410 S
1.4002	X 6 CrAl 13	Z6 CA 13	405 S 17	SUS 405
1.4005	X 12 CrS 13	Z12 CF 13	416 S 21	SUS 416
1.4006	X 12 Cr 13 (X 10 Cr 13)	Z 10 C 13, Z 12 C 13	410 S 21	SUS 410
1.4007	X 35 Cr 14	—	—	SUS 420
1.4016	X 6 Cr 17	Z 8 C 17	430 S 17	SUS 430
1.4021	X 20 Cr 13	Z 20 C 13	420 S 37	SUS 420
1.4024	X 15 Cr 13	—	403 S 17	—
1.4028	X 30 Cr 13	Z 30 C 13, Z 33 C 13	420 S 45	SUS 420
1.4034	X 46 Cr 13	Z 40 C 14	420 S 45	SUS 420
1.4057	X 20 CrNi 17-2	Z 15 CN 16-02	431 S 29	SUS 431
1.4104	X 12 CrMoS 17	Z 10 CF 17	441 S 29	SUS 430 F
1.411	X 90 CrMoV 1	—	—	SUS 440 B
1.4113	X 6 CrMo 17-1	Z 8 CD 17-01	434 S 17	SUS 434
1.4125	X 105 CrMo 17	Z100 CD 17	—	SUS 440 C
1.4301	X 5 CrNi 18-10 (X 4 CrNi 18-10)	Z 6 CN 18-09	304 S 16	SUS 304
1.4303	X 5 CrNi 18-12 (X 4 CrNi 18-12)	Z 8 CN 18-12	305 S 19	—
1.4305	X 10 CrNiS 18-9	Z 10 CNF 18-09	303 S 21	SUS 303
1.4306	X 2 CrNi 19-11	Z 2 CN 18-10	304 S 11	SUS 304 L
1.4307	X 2 CrNi 18-9	Z 3 CN 18-10	304S11	SUS 304 L
1.4310	X 12 CrNi 17-7	Z 11 CN 18-08	301 S 21	SUS 301
1.4311	X 2 CrNiN 18-10	Z 3 CN 18-10 Az	304 S 61	SUS 304 LN
1.4362	X 2 CrNiN 23-4	Z 3 CN 23-04 Az	—	—
1.4372	X 12 CrMnNiN 17-7-5	Z 12 CMN 17-07 Az	—	—
1.4401	X 5 CrNiMo 17-12-2 (X 4 CrNiMo 17-12-2)	Z 6 CND 17-11	316 S 31	SUS 316
1.4404	X 2 CrNiMo 17-13-2 (X 2 CrNiMo 17-12-2)	Z 2 CND 17-12	316 S 11	SUS 316 L
1.4406	X 2 CrNiMoN 17-11-2 (X 2 CrNiMoN 17-11-2)	Z 2 CND 17-11 Az	316 S 62	SUS 316 LN
1.4410	X 2 CrNiMoN 25-7-4	Z 3 CND 25-06 Az	—	—
1.4418	X 4 CrNiMo 16-5	Z 6 CND 16 05 1	—	—
1.4429	X 2 CrNiMoN 17-13-3	Z 2 CND 17-13 Az	—	SUS 316 LN
1.4432	X 2 CrNiMo 17-12-3	Z 3 CND 17-12-03	316 S 13	SUS 316 L
1.4434	X 2 CrNiMoN 17-12-3	Z 3 CND 19-14 Az	—	SUS 317 LN
1.4435	X 2 CrNiMo 18-14-3	Z 2 CND 17-13	316 S 13	SUS 316 L
1.4436	X 5 CrNiMo 17-13-3 (X 4 CrNiMo 17-13-3)	Z 6 CND 17-12	316 S 33	SUS 316
1.4438	X 2 CrNiMo 18-16-4 (X 2 CrNiMo 18-15-4)	Z 2 CND 19-15	317 S 12	SUS 317 L
1.4439	X 2 CrNiMoN 17-13-5	Z 3 CND 18-14-05 Az	—	—
1.4441	X 2 CrNiMo 18-15-3	Z 3 CND 18-14-13	316 S 13	—
1.4460	X 4 CrNiMoN 27-5-2 (X 3 CrNiMoN 27-5-2)	25 CND 27-05 A2	—	SUS 329
1.4462	X 2 CrNiMoN 22-5-3	Z2 CND 22-05 Az	—	—
1.4466	X 1 CrNiMoN 25-22-2 (X 2 CrNiMoN 25-22-2)	—	—	—
1.4504	[X 8 CrNiAl 17-7]	Z 8 CNA 17-07	316 S 111	17-7 PH
1.4510	X 6 CrTi 17 (X 3 CrTi 17)	Z 8 CT 17	—	—
1.4512	X 6 CrTi 12 (X 2 CrTi 12)	Z 3 CT 12	409 S 19	SUH 409
1.4532	X 7 CrNiMoAl 15-7 (X 8 CrNiMoAl 15-7-2)	Z 8 CNDA 15-7	—	—
1.4540	X 4 CrNiCuNb 16-4	Z 6 CNU 17-04	—	SUS 630
1.4541	X 6 CrNiTi 18-10	Z 6 CNT 18-10	321 S 12	SUS 321

UNI - I	UNE - E	AISI - US	condition	material group
28 Mn 6	28 Mn 6, 36 Mn 6	1330	var ¹	2-3
2 C 30, 080 M 30	2 C 30	—	var ¹	2-3
2 C 35, C 35	2 C 35, C 35 k	—	var ¹	2-3
C 36	C 38 k	1035	var ¹	2-3
2 C 40, C 40	2 C 40, C 42 k	1040	var ¹	2-3
2 C 45, C 45	2 C 45, C 45 k	—	var ¹	2-3
C 43	C 42 k	1045	var ¹	2-3
2 C 55, C 55	2 C 55, C 55 k	—	var ¹	4-5
2 C 50, C 50	2 C 50, C 55 k	1050	var ¹	2-3
C 48	C 48 k	1050	var ¹	2-3
2 C 60, C 60	2 C 60	—	var ¹	4-5
50 CrV 4	F.1430	6150	var ¹	6-9
—	—	613	var ¹	10-11
100 Cr 6	—	52100	var ¹	6-9
100 CrMo 7	—	A 485/2	var ¹	6-9
—	—	E-3310	var ¹	6-9
—	—	5120	var ¹	6-9
100 CrMo 7	—	A 485/3	var ¹	6-9
X 45 Cr 13	—	—	var ¹	10-11
X 105 CrMo 17	—	440 C	var ¹	10-11
X 80 MoCrV 44	—	—	var ¹	10-11
X 82 WMoV 6 5	—	M2 regular C	var ¹	10-11
X 75 WCrV 18	—	T 1	var ¹	10-11
X 5 Cr 13	—	410 S	FE	12
X 6 CrA 13	—	405	FE	12
X 12 CrS 13	—	416	FE	12
X 12 Cr 13	—	410	MA	12
—	—	420	MA	12
X 8 Cr 17	—	430	FE	12
X 20 Cr 13	—	420	MA	12
—	—	403	MA	12
—	—	420	MA	13.1
—	—	420	MA	13.1
X 15 CrNi 16	—	431	MA	13.1
X 10 CrS 17	—	430 F	MA	13.1
—	—	440 B	MA	13.1
X 8 CrMo 17	—	434	MA	13.1
—	—	440 C	MA	13.1
X 5 CrNi 18 10	—	304	AU	14.1
X 8 CrNi 18 12	—	305	AU	14.1
X 10 CrNiS 18 09	—	303	AU	14.1
X 2 CrNi 18 11	—	304 L	AU	14.1
—	—	304 L	AU	14.1
X 12 CrNi 17 07	—	301	AU	14.1
—	—	304 LN	AU	14.1
—	—	—	DU	14.2
—	—	201	DU	14.2
X 5 CrNiMo 17 12	—	316	AU	14.1
X 2 CrNiMo 17 12	—	316 L	AU	14.1
X 2 CrNiMoN	—	316 LN	AU	14.1
—	—	—	DU	14.2
—	—	—	MA	13.1
X 2 CrNiMoN 17 13	—	316 LN	AU	14.1
—	—	316 L	AU	14.1
—	—	317 LN	AU	14.1
X 2 CrNiMo 17 13	—	316 L	AU	14.1
X 5 CrNiMo 17 13	—	316	AU	14.1
X 2 CrNiMo 18 16	—	317 L	AU	14.1
—	—	—	AU	14.1
—	—	316 LVM	AU	14.1
—	—	329	DU	14.2
—	—	2205	DU	14.2
—	—	310 mod	S-AU	14.3
X 2 CrNiMo 17.12	—	17-7 PH	AU-PH	14.4
—	—	439, 430 Ti	FE	12
—	—	409	FE	12
—	—	632	AU	14.1
—	—	630	AU	14.1
X 6 CrNiTi 18 11	—	321	AU	14.1

material number	DIN EN - D	AFNOR - F	BS - UK	JIS
1.4542	X 5 CrNiCuNb 17-4	Z 6 CNU 17-04, Z 7 CNNb 17-07	—	SUS 630
1.4548	X 5 CrNiCuNb 17-4-4	Z 7 CNNb 17-07	—	SUS 630
1.4550	X 6 CrNiNb 18-10	Z 6 CNNb 18-10	347 S 17	SUS 347
1.4552	GX 5 CrNiNb 19-10 (G-X 5 CrNiNb 18-9)	Z 6 CNNb 18.10 M	347 C 17	SCS 21
1.4567	X 3 CrNiCu 18-9 (X 3 CrNiCu 18-9-4)	Z 3 CNU 18-09 FF	—	—
1.4568	X 7 CrNiAl 17-7	Z 8 CNA 17-7	316 S 111	17-7 PH
1.4571	X 6 CrNiMoTi 17-12-2	Z 6 CNDT 17-12	320 S 31	SUS 316 Ti
1.4573	X 10 CrNiMoTi 18-12	Z 6 CNDT 17-13	320 S 33	—
1.4580	X 6 CrNiMoNb 17-12-2	Z 6 CNDNb 17-12	—	—
1.4581	GX 5 CrNiMoNb 19-11 (G-X 5 CrNiMoNb 18-10)	Z 4 CNDNb 18.12 M	318 C 17	SCS 22
1.4583	X 10 CrNiMoNb 18-12	Z 6 CNDNb 17-13	—	—
1.4713	X 10 CrAl 7	Z 8 CA 7	—	—
1.4718	X 45 CrSi 9-3	Z 45 CS 9	401 S 45	SUH 1
1.4720	X 7 CrTi 12	Z 6 CT 12	—	SUS 409
1.4724	X 10 CrAl 13	Z 10 C 13	403 S 17	SUS 405
1.4731	X 40 CrSiMo 10-2	Z 40 CSD 10	—	SUH 3
1.4742	X 10 CrAl 18	Z 12 CAS 18, Z 10 CAS 18	430 S 17	SUS 430
1.4748	X 85 CrMoV 18-2	Z 85 CDV 18.02	—	—
1.4762	X 10 CrAl 24	Z10 CAS 24	—	SCH446
1.4821	X 20 CrNiSi 25-4	Z 20 CNS 25.04	—	—
1.4828	X 15 CrNiSi 20-12 Z	15 CN 23-13, Z 15 CNS 20-12	309 S 24	SUS 309 S
1.4833	X 7 CrNi 23-14	Z 15 CN 23.13, Z 15 CNS 24.13	309 S 16	SUH 309
1.4841	X 15 CrNiSi 25-20	Z 15 CNS 25-20, Z 12 CNS 25-20	310 S 24	SUS310
1.4845	X 12 CrNi 25-21	Z 12 CN 26.21, Z 12 CN 25.20	310 S 31	SUH 310
1.4864	X 12 NiCrSi 36-16	Z 20 NCS 33.16, Z 12 NCS 35.16	—	SUH 330
1.4871	X 53 CrMnNiN 21-9	Z 53 CMN 21.09 Az	349 S 54	SUH 35
1.4873	X 45 CrNiW 18-9	Z 35 CNWS 14.14	331 S 40	SUH 31
1.4875	X 55 CrMnNiN 20-8	Z 55 CMN 20.08 Az	—	—
1.4876	X 10 NiCrAlTi 32-20	Z 8 NC 33.21, Z 8 NC 32.21	—	—
1.487	X 12 CrNiTi 18-9	Z 6 CNT 18.12, Z 6 CNT 18.10	321 S 12, 321 S 51	SUS 321
1.4948	X 6 CrNi 18-11	Z 6 CN 18-09	304 S 51	SUS304
1.5023	38 Si 7	46 S 7	—	—
1.5092	60 SiCr 7	61 SC 7	251 A 61	SUP 7
1.5919	15 CrNi 6	16 NC 6	815 M 17	SNC 15
1.5920	18 CrNi 8	20 NC 6	822 M17	SNCM 616
1.6511	36 CrNiMo 4	36 CrNiMo 4	36 CrNiMo 4, 817 A 37	SNCM 439
1.6580	30 CrNiMo 8	30 CrNiMo 8, 30 CND 8	30 CrNiMo 8	SNCM 630
1.6582	34 CrNiMo 6	34 CrNiMo 6	34 CrNiMo 6, 817 M 40	SNCM 447
1.6587	17 CrNiMo 6	18 NCD 6	820 M 17	SNCM 815
1.7003	38 Cr 2	38 Cr 2	38 Cr 2, 120 M 36	SMn 438
1.7003	46 Cr 2	46 Cr 2, 42 C 2	46 Cr 2, 605 M 36	SMn 443
1.7030	28 Cr 4	30 CD 4	530 A 30	—
1.7033	34 Cr 4	34 Cr 4, 32 C 4	34 Cr 4, 530 A 32	SCr 430
1.7034	37 Cr 4	37 Cr 4, 38 C 4	37 Cr 4, 530 A 36	SCr 435
1.7035	41 Cr 4	41 Cr 4, 42 C 4	41 Cr 4, 530 M 40	41 Cr 4SCr 440
1.7037	34 CrS 4	34 CrS 4, 32 C 4	34 CrS 4, 530 A 32	—
1.7038	37 CrS 4	37 CrS 4, 38 C 4	37 CrS 4, 530 A 36	—
1.7039	41 CrS 4	41 CrS 4, 42 C 4	41 CrS 4, 530 M 40	—
1.7102	54 SiCr 6	51 S 7	251 A 58	SKD12
1.7131	16 MnCr 5	16 MC 5	527 M 17	—
1.7147	20 MnCr 5	20 MC 5	—	SMnC 420
1.7176	55 Cr 3	55 C 3	525 A 60	SUP 9
1.7213	25 CrMoS 4	25 CrMoS 4, 25 CD 4	25 CrMoS 4, 708 A 25	—
1.7218	25 CrMo 4	25 CrMo 4, 25 CD 4	25 CrMo 4, 708 A 25	SCM 430
1.7220	34 CrMo 4	34 CrMo 4, 34 CD 4	34 CrMo 4, 708 A 37	SCM 435
1.7225	42 CrMo 4	42 CrMo 4, 42 CD 4	42 CrMo 4, 708 M 40	SCM440
1.7226	34 CrMoS 4	34 CrMoS 4, 34 CD 4	34 CrMoS 4708 A 37	—
1.7227	42 CrMoS 4	42 CrMoS 4, 42 CD 4	42 CrMoS 4, 708 M 40	—
1.7228	50 CrMo 4	50 CrMo 4	50 CrMo 4, 708 A 47	—
1.7321	20 MoCr 4	—	805 M 20	SNCM 220
1.7325	25 MoCr 4	18 CD 4	—	—
1.7361	32 CrMo 12	30 CD 12	722 M 24	—
1.7701	51 CrMoV 4	51 CDV 4	—	SUP 13
1.8159	51 CrV 4	51 CrV 4, 50 CV 4	51 CrV 4	SUP 10
1.8507	34 CrAlMo 5	—	—	—
1.8509	41 CrAlMo 7	40 CAD 6 12	905 M 39	—
1.8515	31 CrMo 12	30 CD 12	722 M 24	—
1.8523	39 CrMoV 13-9	—	897 M 39	—
1.8550	34 CrAlNi 7	—	—	—

UNI - I	UNE - E	AISI - US	condition	material group
—	—	630	AU-PH	14.4
—	—	630	AU-PH	14.4
X 8 CrNiNb 18 11	—	347	AU	14.1
—	—	—	AU	14.1
—	—	302 HQ	AU	14.1
X 2 CrNiMo 17 12	—	17-07 PH	AU-PH	14.4
X 6 CrNiMoTi 17 12	—	316 Ti	AU	14.1
X 6 CrNiMoTi 17 12	—	(316 Ti)	AU	14.1
X 6 CrNiMoNb 17 12	—	316 Cb	AU	14.1
GX 6 CrNiMoNb 20 11	—	—	AU	14.1
X 6 CrNiMoNb 17 13	—	316 Cb, (318)	AU	14.1
—	—	—	FE	10–11
X 45 CS 8	—	HNV 3	—	31–32
—	—	409	—	31–32
X 10 CrAl 12	X 10 CrAl 13	405	FE	12
—	—	—	—	12
X 8 Cr 17	X 10 CrAl 18	430	—	12
—	—	—	—	31–32
X 16 Cr 26	—	446	—	12
—	X 15 CrNiSi 25 04	—	DU	14.2
—	X 10 CrNiSi 20	309	AU	14.1
X 6 CrNi 23 14	—	309 S	AU	14.1
X 16 CrNiSi 25 20	X 15 CrNiSi 25 20	310	AU	14.1
—	—	310 S	AU	14.1
—	X 12 NiCrSi 36 16	330	—	31–32
—	—	EV 8	—	10
X 45 CrNiW 18 9	—	EV 9	—	31–32
—	—	EV 11	—	31–32
—	X 10 NiCrAlTi 32 20	—	S-AU	31–32
X 6 CrNiTi 18 11	—	321, 321 H	—	31–32
—	—	304H	AU	14.1
—	—	—	var ¹	6–9
60 SiCr 8	F.1442	9260	var ¹	6–9
—	F.1581	4320	var ¹	6–9
16 NiCrMo 12	F.1525	—	var ¹	6–9
36 CrNiMo 4, 39 NiCrMo 3 1	36 CrNiMo 4, 40 NiCrMo 4	—	var ¹	6–9
SNCM 630	30 CrNiMo 8, 32 NiCrMo 16	—	var ¹	6–9
34 CrNiMo 6	34 CrNiMo 6	4340	var ¹	6–9
18 NiCrMo 12	F.1560	—	var ¹	6–9
38 Cr 2	38 Cr 2, 38 Cr 3	—	var ¹	6–9
46 Cr 2	46 Cr 2	—	var ¹	6–9
—	—	—	var ¹	6–9
34 Cr 4	34 Cr 4	5132	var ¹	6–9
37 Cr 4	37 Cr 4, 38 Cr 4	5135	var ¹	6–9
41 Cr 4	41 Cr 4, 42 Cr 4	5140	var ¹	6–9
34 CrS 4	34 CrS 4	—	var ¹	6–9
37 CrS 4	37 Cr 4, 38 Cr 4-1	—	var ¹	6–9
41 CrS 4	41 CrS 4, 42 Cr 4-1	—	var ¹	6–9
48 Si 7	F.1450	9260	var ¹	6–9
16 MnCr 5	F.1516	—	var ¹	6–9
20 MnCr 5	F.1523	—	var ¹	6–9
55 Cr 3	—	5155	var ¹	6–9
25 CrMoS 4, 25 CrMo 4	25 CrMoS 4, 30 CrMo 4-1	—	var ¹	6–9
25 CrMo 4	25 CrMo 4, 30 CrMo 4	4130	var ¹	6–9
34 CrMo 4, 35 CrMo 4	34 CrMo 4, 35 CrMo 4	4137	var ¹	6–9
42 CrMo 4	42 CrMo 4	—	var ¹	6–9
34 CrMoS 4, 35 CrMo 4	34 CrMoS 4, 35 CrMo 4	—	var ¹	6–9
42 CrMoS 4, 42 CrMo 4	42 CrMoS 4, 40 CrMo 4-1	—	var ¹	6–9
50 CrMo 4	50 CrMo 4	4150	var ¹	6–9
16 NiCrMo 2	F.1523	8620	var ¹	6–9
20 NiCrMo 2	—	8625	var ¹	6–9
—	—	—	var ¹	6–9
51 CrMoV 4	—	—	var ¹	6–9
51 CrV 4, 50 CrV 4	51 CrV 4	6150	var ¹	6–9
—	35 CrAlMo 5	A 355/D	var ¹	6–9
41 CrAlMo 7	41 CrAlMo 7	A 355/A	var ¹	6–9
31 CrMo 12	31 CrMo 12	—	var ¹	6–9
36 CrMoV 12	—	—	var ¹	6–9
—	—	A 355/C	var ¹	6–9

DIN ISO 513	VDI 3323	Material	Condition	Rm N/mm²	Hardness HB 30	Examples	
P	1	Unalloyed steel/cast steel	C<0.25%	G	420	125	1010, 1015, 1020, 1023, 1102, 1108, 1109, 1213, 1215
	2		0.25≤C<0.55%	G	650	190	1025, 1030, 1035, 1040, 1041, 1045, 1050, 1140, 1141, 1146, 1330
	3	Free cutting steel		V	850	250	1025, 1030, 1035, 1040, 1041, 1045, 1050, 1140, 1141, 1146, 1330
	4		0.55%≤C	G	750	220	1055, 1060,1151
	5			V	1000	300	1055, 1060,1151
	6	Low-alloyed steel/cast steel		G	600	180	
	7			V	930	275	4130, 4140, 4150, 4320, 4340, 5120, 5132, 5135, 5140, 5155, 6150, 8620, 8625, 9260,
	8			V	1000	300	A 355/A, A 355/C, A 355/D, A485/2, A 485/3, E-3310
	9			V	1200	350	
	10	High-alloyed steel/cast steel		G	680	200	440 C, 613, EV 8, M2 regular C, T1
	11	Tool steel		V	1100	325	440 C, 613, EV 8, M2 regular C, T1
	12	Stainless steel/cast steel		FE/MA	680	200	403, 405, 409, 410, 410 S, 416, 420, 430, 430 Ti, 439, 446,
M	13.1			MA	820	240	420, 430 F, 431, 434, 440 B, 440 C
	13.2			MA-PH	1060	330	630, 630
	14.1	Stainless steel/cast steel		AU	600	180	301, 303, 304, 304 L, 304 LN, 305, 309 S, 316, 316 L, 316 LN, 317 L, 317 LN
	14.2			DU	740	230	201, 329, 2205
	14.3			S-AU	680	200	310 mod
	14.4			AU-PH	1060	330	17-7 PH, 630
K	15	Grey iron GG		FE/PE		180	Class 20 B, Class 25 B,
	16			PE		260	Class 30 B, Class 40 B, Class 45 B, Class 50 B
	17	Nodular iron GGG		FE		160	Class 50 B, Grade 60-40-18, Grade 65-45-12
	18			PE		250	Grade 80-55-06, Grade 100-70-03, Grade120-90-02
	19	Malleable iron GTS/GTW		FE		130	Grade 22010, 32510
N	20			PE		230	GTW-35-04, GTS-55-04, GTS-65-02
	21	Wrought aluminium alloys		NAG		60	6061, 2014-T6, 2011-T3, 2024-T4, A2, 7075, 1000, AlMg 1, AlCuMg 1, AlMgSiPb, AlMgSi 1
	22			AG		100	6061, 2014-T6, 2011-T3, 2024-T4, A2, 7075, 1000, AlMg 1, AlCuMg 1, AlMgSiPb, AlMgSi 1
	23	Cast aluminium alloys	Si<12%	NAG		75	A380-1, A280, A390-1, G-AISI 10 Mg, G-AISI12, G-AlCu 5 Si 3, G-AISI 17, G-AISI 23
	24			AG		90	A380-1, A280, A390-1, G-AISI 10 Mg, G-AISI12, G-AlCu 5 Si 3, G-AISI 17, G-AISI 23
	25		Si>12%			130	A380-1, A280, A390-1, G-AISI 10 Mg, G-AISI12, G-AlCu 5 Si 3, G-AISI 17, G-AISI 23
	26	Copper/copper alloys	Pb>1%			110	Free cutting brass, CuNi 18 Zn 19 Pb
	27					90	Brass, red brass, CuZn33, CuZn-/CuSnZn-alloys
	28					100	Bronze, electrolytic copper, CuNi 3 Si, CuSn-alloys
	29	Non-metals					Thermosetting plastics, FVK, Fiber reinforced plastics, Bakelit
S	30						Hard rubber
	31	High-temperature alloys	Fe-based	G		200	A-286, 321, 321 H, 330, 409, EV 9, EV11, HNV3
	32			AG		280	A-286, 321, 321 H, 330, 409, EV 9, EV11, HNV3
	33		Ni-/Co-based	G		250	INCONEL® 601/617/625/700/706/718, NIMONIC® 80 A, Hastelloy®, UDIMET®, Haynes® 25, Waspaloy, Rene41, Stellite®
	34			AG		350	INCONEL® 601/617/625/700/706/718, NIMONIC® 80 A, Hastelloy®, UDIMET®, Haynes® 25, Waspaloy, Rene41, Stellite®
	35			GO		320	INCONEL® 601/617/625/700/706/718, NIMONIC® 80 A, Hastelloy®, UDIMET®, Haynes® 25, Waspaloy, Rene41, Stellite®
	36	Titanium/titanium alloys, Alpha-/Beta-alloys			400		Titanium
H	37			AG	1050		TiAl 64 V
	38.1	Steel		H		45 HRC	90 MnV 8, Hardox® 400
	38.2			H		55 HRC	Hardox 500
	39.1			H		60 HRC	HSS, 90 MnV 8
	39.2			H		>62 HRC	HSS, 90 MnV 8
	40.1	Chilled cast iron		GO		400	G-X 260 Cr 27, G-X 260 NiCr 42, G-X 300 CrNiSi 9 5 2, G-X 330 NiCr 42
	40.2			GO		>440	G-X 260 Cr 27, G-X 260 NiCr 42, G-X 300 CrNiSi 9 5 2, G-X 330 NiCr 42
	41.1	Cast iron		H		55 HRC	G-X 300 NiMo 3 Mg
41.2			H		>57 HRC	G-X 300 NiMo 3 Mg	

Material Groups and Conditions

Many materials — mostly steels — can be available in various microstructures that differ in their machinability significantly. Those materials are part of several material groups depending on their actual conditions.


AG — Aged	G — Annealed	NAG — Non-aged (non-aging)
AU — Austenitic, AISI 300	GG — Grey cast iron	PH — Precipitation hardened
BF — Heat treated to specified strength	GGG — Nodular cast iron	S-AU — Superaustenitic, AISI 300
BG — Heat treated to specified microstructure	GO — Cast	U — Untreated
BY — Heat treated to improved machinability	H — Hardened	V — Heat treated
DU — Stainless steel duplex (austenitic-ferritic)	MA — Martensitic, AISI 400	var1 — Variable
FE — Ferritic, AISI 400	N — Normalised	

DIN ISO 513	VDI 3323	Material	Condition	Rm N/mm²	Hardness HB 30	Examples	
P	1	Unalloyed steel/cast steel	C<0,25%	G	420	125	9 SMn 28, St 37.3, C 10, Ck 22, GS-16 Mn 5
	2		0,25≤C<0,55%	G	650	190	35 S 20, GS-45, GS-52, St 52.3, C 25, C 45, Ck 45, Cf 53
	3	Free cutting steel		V	850	250	35 S 20, GS-45, GS-52, St 52.3, C 25, C 45, Ck 45, Cf 53
	4		0,55%≤C	G	750	220	GS-60, 60 S 20, C 60, Ck 67, C 60 W, Ck 75, C 105 W 1, C 110 W
	5			V	1000	300	GS-60, 60 S 20, C 60, Ck 67, C 60 W, Ck 75, C 105 W 1, C 110 W
	6	Low-alloyed steel/cast steel		G	600	180	15 Cr 3, 16 MnCr 5, 17 CrNiMo 6, 25 CrMo 4, 29 CrMoV 9, 30 CrNiMo8
	7			V	930	275	31 CrV 3, 42 CrMo 4, 51 CrV 4, 62 SiMnCr 4, 100 Cr 6, G-105 W 1,
	8			V	1000	300	105 WCr 6
	9			V	1200	350	105 WCr 6
	10	High-alloyed steel/cast steel		G	680	200	X 210 Cr 12, X 40 CrMoV 5 1, X 30 WCrV 9 3, X 85 CrMoV 18 2,
	11	Tool steel		V	1100	325	X 38 CrMoV 5 3, X 23 CrNi 17, X 155 CrVMo 12 1, S 6-5-2-5
M	12	Stainless steel/cast steel		FE/MA	680	200	1.4000, 1.4005, 1.4021, 1.4109, 1.4119, 1.4120, 1.4313, 1.4510, 1.4512, 1.4523
	13.1			MA	820	240	1.4000, 1.4002, 1.4005, 1.4006, 1.4024, 1.4119, 1.4120, 1.4313, 1.4510, 1.4512, 1.4523
	13.2			MA-PH	1060	330	1.4542, 1.4548, 1.4923
	14.1	Stainless steel/cast steel		AU	600	180	1.4301, 1.4401, 1.4436, 1.4541, 1.4550, 1.4568, 1.4571, 1.4573, 1.4580
	14.2			DU	740	230	1.4362, 1.4417, 1.4410, 1.4460, 1.4462, 1.4575, 1.4582
	14.3			S-AU	680	200	1.4465, 1.4505, 1.4506, 1.4529 (254SMO), 1.4539, 1.4563, 1.4577, 1.4586, 654SMO
	14.4			AU-PH	1060	330	1.4504, 1.4568
	K	15	Grey iron GG		FE/PE		180
16				PE		260	GG20, GG-25, GG-30, GG-25Cr
17		Nodular iron GGG		FE		160	GGG-35.3, GGG-40, GGG-50, GGV-30
18				PE		250	≥GGG-60, GGV-40
19		Malleable iron GTS/GTW		FE		130	GTS-35-10, GTS-45-06, GTW-S-38-12
20				PE		230	GTW-35-04, GTS-55-04, GTS-65-02
N	21	Wrought aluminium alloys		NAG		60	Al 99.5, AlMg 1
	22			AG		100	AlCuMg 1, AlMgSiPb, AlMgSi 1
	23	Cast aluminium alloys	Si<12%	NAG		75	G-AlSi 10 Mg, G-AlSi12
	24			AG		90	G-AlCu 5 Si 3
	25		Si>12%			130	G-AlSi 17, G-AlSi 23
	26	Copper/copper alloys	Pb>1%			110	Free cutting brass, CuNi 18 Zn 19 Pb
	27					90	Brass, red brass, CuZn33, CuZn-/CuSnZn-alloys
	28					100	Bronze, electrolytic copper, CuNi 3 Si, CuSn-alloys
	29	Non-metals					Thermosetting plastics, FVK, Fiber reinforced plastics, Bakelit
S	31	High-temperature alloys	Fe-based	G		200	1.4864, 1.4865, 1.4876
	32			AG		280	1.4864, 1.4865, 1.4876
	33		Ni-/Co-based	G		250	INCONEL® 718, NIMONIC® 80 A, Hastelloy®, UDIMET®
	34			AG		350	INCONEL® 718, NIMONIC® 80 A, Hastelloy®, UDIMET®
	35			GO		320	INCONEL® 718, NIMONIC® 80 A, Hastelloy®, UDIMET®
	36	Titanium/titanium alloys, Alpha-/Beta-alloys			400		Titanium
	37			AG	1050		TiAl 6 V 4
H	38.1	Steel		H		45 HRC	90 MnV 8, Hardox 400
	38.2			H		55 HRC	Hardox 500
	39.1			H		60 HRC	HSS, 90 MnV 8
	39.2			H		>62 HRC	HSS, 90 MnV 8
	40.1	Chilled cast iron		GO		400	G-X 260 Cr 27, G-X 260 NiCr 42, G-X 300 CrNiSi 9 5 2, G-X 330 NiCr 42
	40.2			GO		>440	G-X 260 Cr 27, G-X 260 NiCr 42, G-X 300 CrNiSi 9 5 2, G-X 330 NiCr 42
	41.1	Cast iron		H		55 HRC	G-X 300 NiMo 3 Mg
	41.2			H		>57 HRC	G-X 300 NiMo 3 Mg

Material Groups and Conditions

Many materials — mostly steels — can be available in various microstructures that differ in their machinability significantly. Those materials are part of several material groups depending on their actual conditions.

AG — Aged	G — Annealed	NAG — Non-aged (non-aging)
AU — Austenitic	GG — Grey cast iron	PH — Precipitation hardened
BF — Heat treated to specified strength	GGG — Nodular cast iron	S-AU — Superaustenitic
BG — Heat treated to specified microstructure	GO — Cast	U — Untreated
BY — Heat treated to improved machinability	H — Hardened	V — Heat treated
DU — Stainless steel duplex (austenitic-ferritic)	MA — Martensitic	var1 — Variable
FE — Ferritic	N — Normalised	

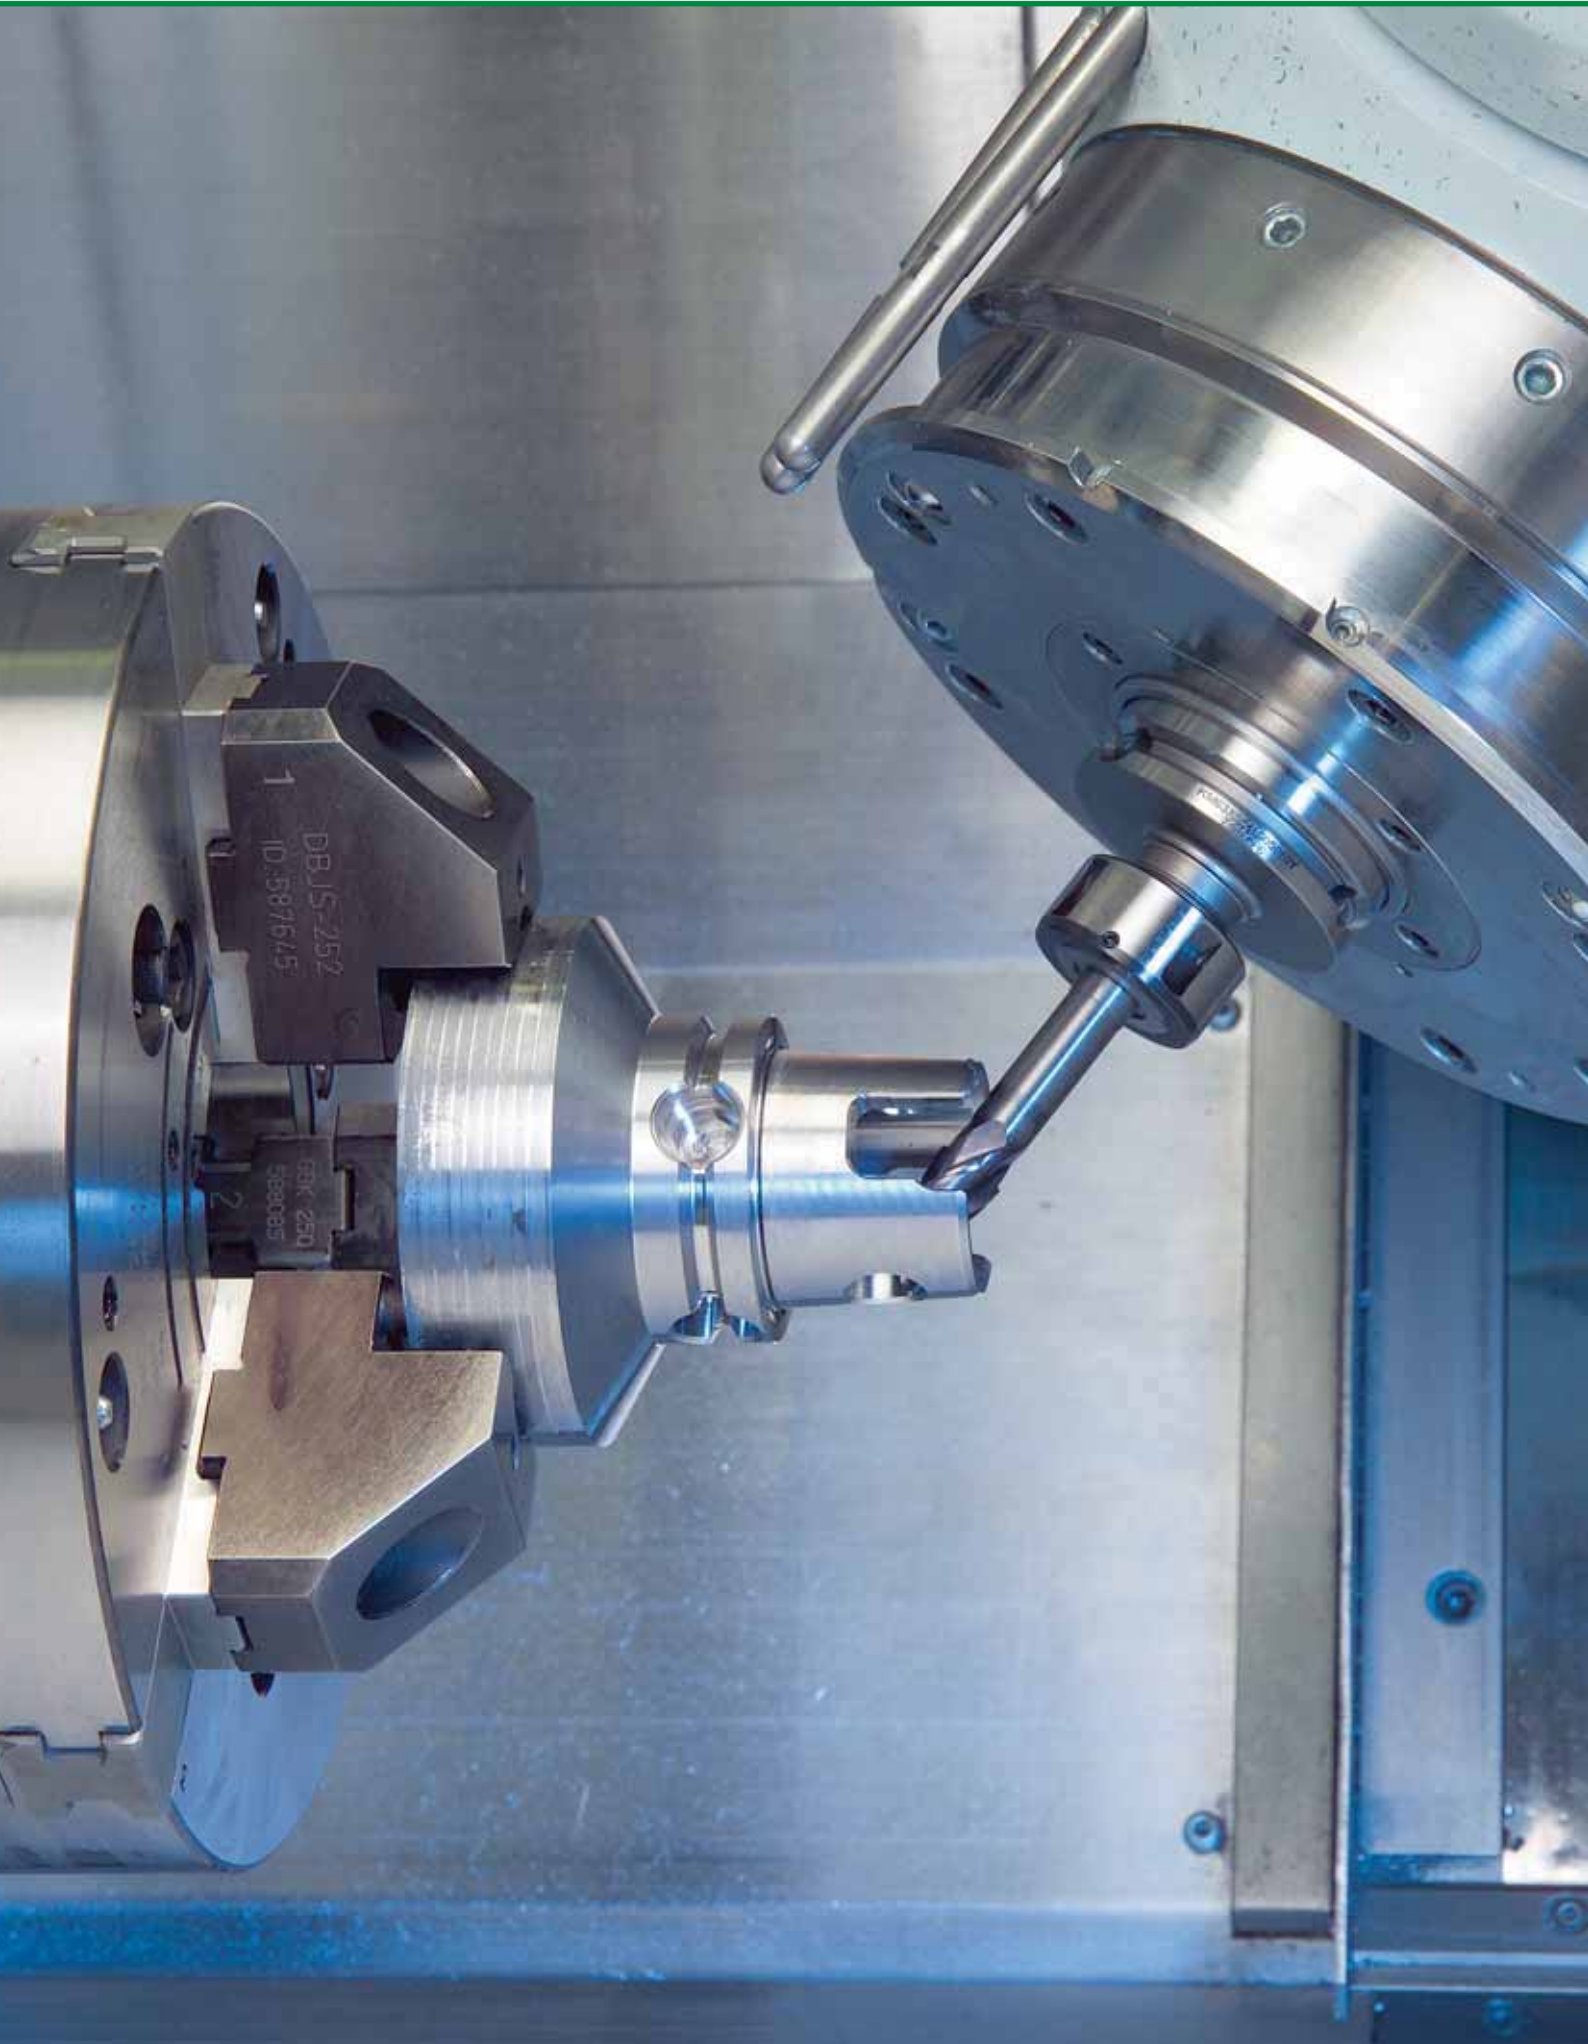

Tooling Systems

Tooling Selection Guide	.B4–B5
HSK63 Tap Holders • Synchro Plus	.B6
HSK100 Tap Holders • Synchro Plus	.B7
Straight Shank Tap Holders • Synchro Plus	.B8
BT Tap Holders • Synchro Plus	.B9
Shank Tools	.B10–B21
KM40TS	.B10
KM50TS	.B11
KM63TS	.B12
HSK63A	.B13
HSK100A	.B14
BT40	.B15
BT50	.B16
CAT40	.B17
CAT50	.B18
DV40	.B19
DV50	.B20
Straight Shank	.B21
Collets and Sleeves	.B22–B31
Quick-Change Tap Adaptors	.B32–B37

Tooling Systems for Taps • Chucks, Collets, and Adaptors

ERICKSON™ tap holders are uniquely designed to provide the highest productivity and longest life from your thread-cutting tools and taps. The addition of the Synchro Plus™ gives WIDIA™ the capability to optimise performance on machines with synchronous tapping cycles in the fast-growing synchronous-tap market.



Tap Holder Systems


Introducing the new Synchro Plus Tapping System:

- Designed to optimise tool life in synchronous tapping.
- Reduces axial cutting forces up to 50%.
- Modular design increases application flexibility.
- Through coolant capability up to 50 bar.
- Uses standard ER tap collets.
- Applicable for use with cylindrical shank tools.
- For use with taps from 4–20mm (3/16–1/2").

See pages B6–B9 for the Synchro Plus Tapping Systems.

How Do Catalogue Numbers Work?

Each character in our catalogue number signifies a specific trait of that product. Use the following key columns and corresponding images to easily identify which attributes apply.

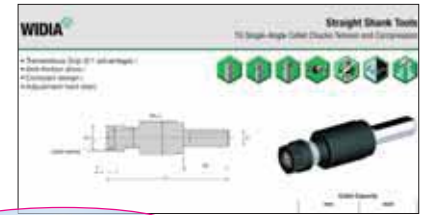

TG50100M

TG

Toolholder
Style

50

Toolholder
Size

100

Gage
Length

M

Identification
Values

TG =
Collet series xx (50), xxx (100)

EM =
I.D. size: metric — xx = xx, (20);
inch — xxx = x.xx, (075)

SM =
O.D. size: metric — xx = xx, (20);
inch — xxx = x.xx, (075)

(Taper gage line
to front of tool)

metric
xxx = xxx

inch
xxx = x.xx


(blank) =
Tool built to inch values

M =
Tool built to metric values

BB = Bar blank
CS = Combination shell mill and slotting
cutter adaptor
DA = Double-angle collet chuck
DC = Drill chuck
EM = End mill adaptor
ER = DIN 6499 single-angle collet chuck
GB = Gage bar
HC = Hydraulic chuck — Standard Line
HCB = Hydraulic chuck — Basic Line
HCSL = Hydraulic chuck — Slim Line
HCSLT = Hydraulic chuck — Slim Line — Trend
HCT = Hydraulic chuck — Trend Line
HPMC = Bearing milling chuck —
high performance

HSK = HSK modular adaptor
JT = Jacobs modular taper adaptor
KM = KM™ adaptor
KR = Romicron™ boring adaptors
MT = Morse taper adaptor
RC = Rapid Change — T&C tapping
adaptor chuck
SA = Slotting cutter adaptor
SFHDTT = **SAFE-LOCK™** heavy-duty Shrink Fit
thermo toolholder
SFTT = **SAFE-LOCK™** Shrink Fit
thermo toolholder
SM2C = Shell mill adaptor with coolant
and small diameter
SMC = Shell mill adaptor with coolant
SS = Adaptor for straight shanks (drills)

SSF = Adaptor for straight shanks with
flat (drills)
ST = Screw-On adaptors
STRC = Rapid Change — solid tapping
adaptor chuck
SWN = Whistle Notch™ 2° — short —
(not to DIN standard)
TA = Tap chuck adaptor
TG = Tremendous Grip single-angle
collet chuck
TT = Shrink Fit thermo toolholder
TTHT = Shrink Fit thermo toolholder —
high torque
WD = Whistle Notch with drive
WN = Whistle Notch (2° metric; 5° inch)

ERICKSON
Toolholder
OptionsHSK40A • HSK50A • HSK63T
HSK63A • HSK80A • HSK100AHSK32C • HSK40C
HSK50C • HSK63C


HSK40E • HSK50E




HSK63FP • HSK80FP




BTKV40 • BTKV50



CVKV40 • CVKV50



Tapping



Synchro Plus™ • ER20 and ER32

	HSK40A	✓	HSK40E	✓	BT50	✓
	HSK50A		HSK50E		CV40	
	HSK63T		HSK63F		CV50	
	HSK63A		HSK80F		DV40	
	HSK80A	✓	BTKV40		DV50	
	HSK100A	Page: B7	BTKV50		QC30	
	HSK32C	✓	CVKV40		QC40	
	HSK40C		CVKV50		QC50	
	HSK50C		BT30	Page: B9	R8	
	HSK63C		BT40	✓	Straight Shanks	Page: B8

RC Rapid Change • Tension and Compression

	HSK40A	✓	HSK40E	✓	BT50	Page: B16
	HSK50A		HSK50E		CV40	Page: B17
	HSK63T		HSK63F		CV50	Page: B18
	HSK63A	Page: B13	HSK80F		DV40	Page: B19
	HSK80A	✓	BTKV40		DV50	Page: B20
	HSK100A	Page: B14	BTKV50		QC30	✓
	HSK32C	✓	CVKV40		QC40	
	HSK40C		CVKV50		QC50	
	HSK50C		BT30		R8	
	HSK63C		BT40	Page: B15	Straight Shanks	

RC Rapid Change • Solid*

	HSK40A	✓	HSK40E	✓	BT50	Page: D87*
	HSK50A		HSK50E		CV40	Page: E34*
	HSK63T		HSK63F		CV50	Page: E76*
	HSK63A		HSK80F		DV40	Page: F34*
	HSK80A		BTKV40		DV50	Page: F67*
	HSK100A		BTKV50		QC30	✓
	HSK32C		CVKV40		QC40	
	HSK40C		CVKV50		QC50	
	HSK50C		BT30		R8	
	HSK63C		BT40	Page: D54*	Straight Shanks	

*Page numbers refer to WIDIA™ Tooling Systems catalogue (A-09-02122).

TG Collet Chucks*


	HSK40A	Page: B34*	HSK40E	✓	BT50	Page: D72*
	HSK50A	Page: B45*	HSK50E		CV40	Pages: E16–E18*
	HSK63T	✓	HSK63F		CV50	Pages: E52–E56*
	HSK63A	Page: B73*	HSK80F		DV40	Pages: F14–F15*
	HSK80A	Page: B100*	BTKV40	Page: C8*	DV50	Pages: F49–F50*
	HSK100A	Page: B121*	BTKV50	Page: C26*	QC30	Page: G4*
	HSK32C	✓	CVKV40	Page: C45*	QC40	Page: G11*
	HSK40C		CVKV50	Page: C58*	QC50	Page: G19*
	HSK50C		BT30	Page: D9*	R8	✓
	HSK63C		BT40	Page: D32*	Straight Shanks	Pages: H6–H7*

*Page numbers refer to WIDIA Tooling Systems catalogue (A-09-02122).


(continued)

✓ Indicates "Not Available".


BT30 • BT40 • BT50




CV40 • CV50



DV40 • DV50




QC30 • QC40 • QC50



R8



SS


**ERICKSON
Toolholder
Options**
Tapping (continued)

ER Collet Chucks*

	HSK40A	Page: B35*	HSK40E	Page: B168*	BT50	Pages: D73–D75*
	HSK50A	Pages: B46–B47*	HSK50E		CV40	Pages: E19–E21*
	HSK63T		HSK63F	Page: B178*	CV50	Pages: E57–E59*
	HSK63A	Pages: B74–B75*	HSK80F	Page: B182*	DV40	Pages: F16–F19*
	HSK80A	Pages: B102–B103*	BTKV40	Pages: C10–C11*	DV50	Pages: F51–F53*
	HSK100A	Pages: B122–B123*	BTKV50	Pages: C28–C29*	QC30	
	HSK32C	Page: B140*	CVKV40	Pages: C46–C47*	QC40	
	HSK40C	Page: B147*	CVKV50	Pages: C60–C61*	QC50	
	HSK50C	Page: B153*	BT30	Pages: D10–D11*	R8	
	HSK63C	Page: B159*	BT40	Pages: D33–D35*	Straight Shanks	Pages: H8–H11*

*Page numbers refer to WIDIA™ Tooling Systems catalogue (A-09-02122).

DA Collet Chucks*


	HSK40A		HSK40E		BT50	Page: D76*
	HSK50A		HSK50E		CV40	Page: E22*
	HSK63T		HSK63F		CV50	Page: E60*
	HSK63A		HSK80F		DV40	Pages: F20–F23*
	HSK80A		BTKV40		DV50	Pages: F54–F55*
	HSK100A		BTKV50		QC30	Page: G5*
	HSK32C		CVKV40		QC40	Page: G12*
	HSK40C		CVKV50		QC50	
	HSK50C		BT30	Pages: D12–D13*	R8	Page: G26*
	HSK63C		BT40	Pages: D36–D37*	Straight Shanks	Pages: H12–H22*

*Page numbers refer to WIDIA Tooling Systems catalogue (A-09-02122).

TA Adaptors*

	HSK40A		HSK40E		BT50	Page: D78*
	HSK50A		HSK50E		CV40	Page: E25*
	HSK63T		HSK63F		CV50	
	HSK63A		HSK80F		DV40	
	HSK80A		BTKV40		DV50	
	HSK100A		BTKV50		QC30	
	HSK32C		CVKV40		QC40	
	HSK40C		CVKV50		QC50	
	HSK50C		BT30		R8	
	HSK63C		BT40	Page: D40*	Straight Shanks	

*Page numbers refer to WIDIA Tooling Systems catalogue (A-09-02122).

**Tapping
Collets and
Adaptors**


Indicates "Not Available".

**RC Rapid
Change
Adaptors**



Pages: B34–B37

**TG
Collets**


Pages: B21–B28


**ER
Collets**


Pages: B29–B31

**DA
Collets***


Pages: I65–I75*

*Page numbers refer to WIDIA Tooling Systems catalogue (A-09-0212).

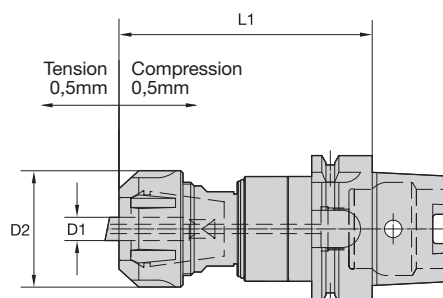

■ HSK63 Synchro Plus • Metric

order number	catalogue number	collet size	D1	D2	L1	tap size
5525685	HSK63ASYTER20095M	ER20	4,5–10	34,00	99,10	M4 - M12
5525686	HSK63ASYTER32108M	ER32	4,5–16	45,00	112,40	M4 - M20



NOTE: For ER Collets, see the WIDIA™ Tooling Systems catalogue (A-09-02122) pages I58–I59.
Coolant tube must be ordered separately; see the WIDIA Tooling Systems catalogue (A-09-02122) page J32.
Need two adjustment wrenches to properly tighten; option to use tightening device with new torque wrench possible.
Adjustment screws ordered separately.
Adjustment range for length adjusting screw is +2mm for both ER20 and ER32.

■ Length Adjustment

	clamping range	catalogue number	adjustment screw wrench
ER 20:	6–7mm	ASER20006M	TWASER20
	8–9mm	ASER20008M	TWASER20
ER 32:	10mm	ASER20010M	TWASER20
	9mm	ASER32009M	TWASER32
	10–12mm	ASER32010M	TWASER32
	14–16mm	ASER32014M	TWASER32

■ Optional Accessories

holder description	locknut	adjustment wrench set	tightening device	torque wrench	torque wrench adaptor	HSK coolant tube	HSK wrench
HSK63ER20	1859410	CWER20SYT -SET	TFSYT	TWTF2	TWAHEX	1132145	1134161
HSK63ER32	1128857	CWER32SYT -SET	TFSYT	TWTF2	TWAROUND	1132145	1134161

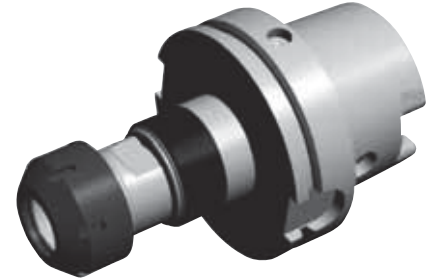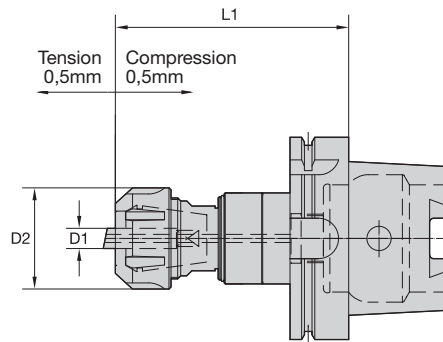

■ HSK100 Synchro Plus • Metric

order number	catalogue number	collet size	D1	D2	L1	tap size
5525687	HSK100ASYTER20102M	ER20	4,5–10	34,00	105,60	M4 - M12
5525688	HSK100ASYTER32115M	ER32	4,5–16	45,00	118,90	M4 - M20


NOTE: For ER Collets, see the WIDIA™ Tooling Systems catalogue (A-09-02122) pages I58–I59.
Coolant tube must be ordered separately; see the WIDIA Tooling Systems catalogue (A-09-02122) page J32.
Need two adjustment wrenches to properly tighten; option to use tightening device with new torque wrench possible.
Adjustment screws ordered separately.
Adjustment range for length adjusting screw is +2mm for both ER20 and ER32.

■ Length Adjustment

	clamping range	catalogue number	adjustment screw wrench
ER 20:	6–7mm	ASER20006M	TWASER20
	8–9mm	ASER20008M	TWASER20
ER 32:	10mm	ASER20010M	TWASER20
	9mm	ASER32009M	TWASER32
	10–12mm	ASER32010M	TWASER32
	14–16mm	ASER32014M	TWASER32

■ Optional Accessories

holder description	locknut	adjustment wrench set	tightening device	torque wrench	torque wrench adaptor	HSK coolant tube	HSK wrench
HSK100ER20	1859410	CWER20SYT -SET	TFSYT	TWTF2	TWAHEX	1132147	1132993
HSK100ER32	1128857	CWER32SYT -SET	TFSYT	TWTF2	TWAROUND	1132147	1132993

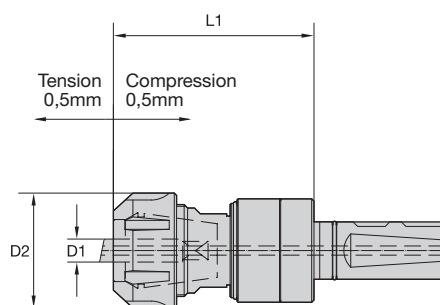

■ Straight Shank Synchro Plus • Metric

order number	catalogue number	collet size	D1	D2	L1	tap size
5525781	SS25SYTER20073M	ER20	4,5–10	34,00	76,60	M4 - M12
5525782	SS25SYTER32087M	ER32	4,5–16	45,00	90,90	M4 - M20

NOTE: For ER Collets, see the WIDIA™ Tooling Systems catalogue (A-09-02122) pages I58–I59.

Coolant tube must be ordered separately; see the WIDIA Tooling Systems catalogue (A-09-02122) page J32.

Need two adjustment wrenches to properly tighten; option to use tightening device with new torque wrench possible.

Adjustment screws ordered separately.

Adjustment range for length adjusting screw is +2mm for both ER20 and ER32.

■ Shank Adaptors


spindle connection	Whistle Notch adaptor catalogue number	WIDIA Tooling Systems catalogue page
BT40	1126479	D40
BT50	1134607	D78
CV40	1549330	E24
CV50	1804515	E62
DV40	1135273	F25
DV40 • Short	1134537	F26
DV50	1137558	F57
DV50 • Short	1134539	F58

■ Optional Accessories

holder description	locknut	adjustment wrenches	tightening device	torque wrench	torque wrench adaptor
SS25ER20	1859410	CWER20SYT -SET	TFSYT	TWTF2	TWAHEX
SS25ER32	1128857	CWER32SYT -SET	TFSYT	TWTF2	TWAROUND

■ Length Adjustment

	clamping range	catalogue number	adjustment screw wrench
ER 20:	6–7mm	ASER20006M	TWASER20
	8–9mm	ASER20008M	TWASER20
ER 32:	10mm	ASER20010M	TWASER20
	9mm	ASER32009M	TWASER32
	10–12mm	ASER32010M	TWASER32
	14–16mm	ASER32014M	TWASER32

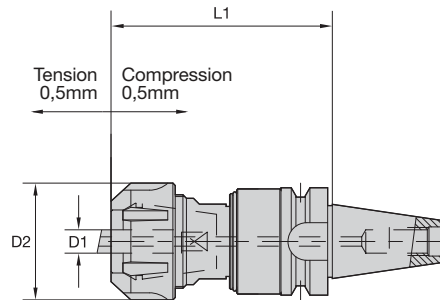

Tooling Systems

■ BT Synchro Plus • Metric

order number	catalogue number	collet size	D1	D2	L1	tap size
5525689	BT30BSYTER20085M	ER20	4,5–10	34,00	90,10	M4 - M12
5525780	BT30BSYTER32073M	ER32	4,5–16	45,00	98,40	M4 - M20


NOTE: For ER Collets, see the WIDIA™ Tooling Systems catalogue (A-09-02122) pages I58–I59.
Coolant tube must be ordered separately; see the WIDIA Tooling Systems catalogue (A-09-02122) page J32.
Need two adjustment wrenches to properly tighten; option to use tightening device with new torque wrench possible.
Adjustment screws ordered separately.
Adjustment range for length adjusting screw is +2mm for both ER20 and ER32.

■ Optional Accessories

holder description	locknut	adjustment wrenches	tightening device	torque wrench	torque wrench adaptor
BT30ER20	1859410	CWER20SYT -SET	TFSYT	TWTF2	TWAHEX
BT30ER32	1128857	CWER32SYT -SET	TFSYT	TWTF2	TWAROUND

■ Length Adjustment


	clamping range	catalogue number	adjustment screw wrench
ER 20:	6–7mm	ASER20006M	TWASER20
	8–9mm	ASER20008M	TWASER20
ER 32:	10mm	ASER20010M	TWASER20
	9mm	ASER32009M	TWASER32
	10–12mm	ASER32010M	TWASER32
	14–16mm	ASER32014M	TWASER32

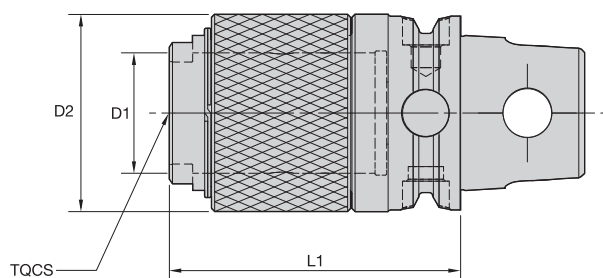

■ ST • Solid Tap Chuck

order number	catalogue number	TQCS adaptor size	D1		D2		L1		kg	lbs
			mm	in	mm	in	mm	in		
3964071	KM40TSST1045M	1	19	.749	35	1.375	45	1.774	0,30	.65
3964072	KM40TSST2070M	2	31	1.222	51	2.000	70	2.758	0,71	1.56

NOTE: Quick-change tap adaptors available and ordered separately; see page B32.

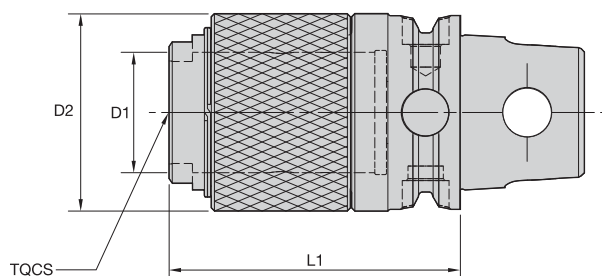


Tooling Systems



■ ST • Solid Tap Chuck

order number	catalogue number	TQCS adaptor size	D1		D2		L1		kg	lbs
			mm	in	mm	in	mm	in		
3964133	KM50TSST1050M	1	19	.749	35	1.375	50	1.971	0,48	1.06
3964134	KM50TSST2075M	2	31	1.222	51	2.000	75	2.955	0,89	1.95

NOTE: Quick-change tap adaptors available and must be ordered separately; see page B32.

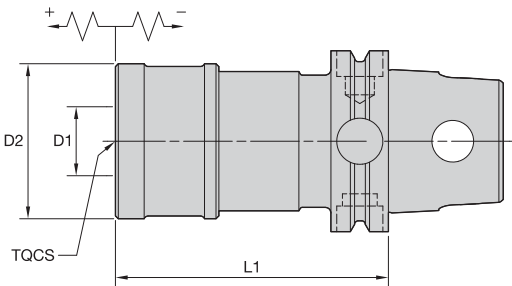


■ TC • Tension and Compression

order number	catalogue number	TQCS adaptor size	D1		D2		L1		kg lbs	
			mm	in	mm	in	mm	in		
1126271	KM63STC2095M	2	31	1.220	53	2.090	95	3.740	0,96	2.12
1126272	KM63STC3147M	3	48	1.890	78	3.070	147	5.790	1,97	4.34

NOTE: Quick-change tap adaptors available and must be ordered separately; see page B32.

- Rapid Change style.

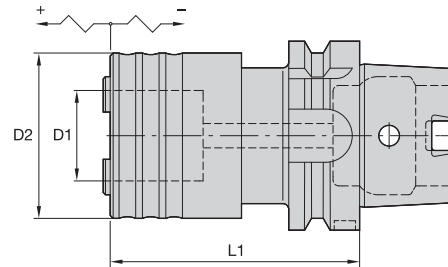


Tooling Systems

ERICKSON

RC-HSK Form A

order number	catalogue number	adaptor size	tap size		D1	D2	L1	tension	compression	kg
			mm	in						
1520637	HSK63ACHRC1105M	1	M1.0 - M14	#0 - 9/16	19	39	105	7,5	7,5	1,30
1520639	HSK63ACHRC2140M	2	M4.5 - M24	5/16 - 7/8	31	60	140	10,0	10,0	2,20
1520641	HSK63ACHRC3203M	3	M14.0 - M36	13/16 - 1 3/8	48	86	203	17,5	17,5	4,90

NOTE: Quick-change tap adaptors are available and must be ordered separately; see page B32.
HSK coolant unit and wrench are available and must be ordered separately.
For HSK adaptors to DIN 69893-1.
Form A or Form C coolant pipe must be removed.

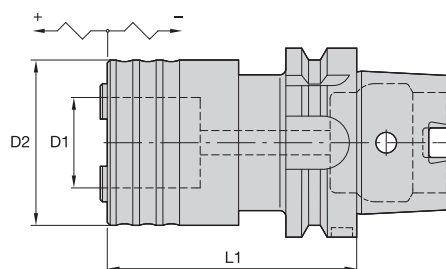


ERICKSON™

■ RC-HSK Form A

order number	catalogue number	adaptor size	tap size		D1	D2	L1	tension	compression	kg
			mm	in						
1520643	HSK100ACHRC1112M	1	M1.0 - M14	#0 - 9/16	19	39	112	7,5	7,5	3,60
1520644	HSK100ACHRC2144M	2	M4.5 - M24	5/16 - 7/8	31	60	144	10,0	10,0	4,10
1520645	HSK100ACHRC3210M	3	M14.0 - M36	13/16 - 1 3/8	48	86	210	17,5	17,5	6,90

NOTE: Quick-change tap adaptors are available and must be ordered separately; see page B32.
HSK coolant unit and wrench are available and must be ordered separately.

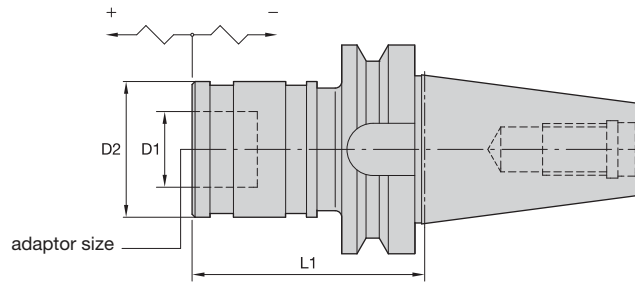



Tooling Systems

ERICKSON

■ RC-BT Form A

order number	catalogue number	adaptor size	tap size		D1	D2	L1	tension	compression	kg
			mm	in						
1125829	BT40RC1067M	1	M1 - M14	#0 - 9/16	19	36	67	7,5	7,5	2,00
1125812	BT40RC2094M	2	M5 - M24	5/16 - 7/8	31	53	94	12,5	12,5	2,20

NOTE: Quick-change tap adaptors are available and must be ordered separately; see page B32.

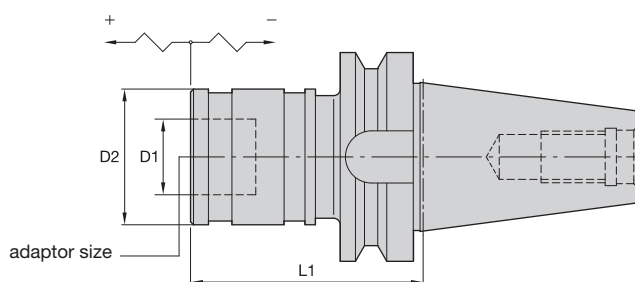



ERICKSON™

■ RC-BT Form A


order number	catalogue number	adaptor size	tap size		D1	D2	L1	tension	compression	kg
			mm	in						
1778908	BT50RC1075M	1	M1 - M14	#0 - 9/16	19	36	73	7,5	7,5	3,10
1127889	BT50RC2102M	2	M5 - M24	5/16 - 7/8	31	53	102	12,5	12,5	3,90
1135816	BT50RC3141M	3	M14 - M27	13/16 - 1 3/8	48	78	141	20,0	20,0	4,70

NOTE: Quick-change tap adaptors are available and must be ordered separately; see page B32.

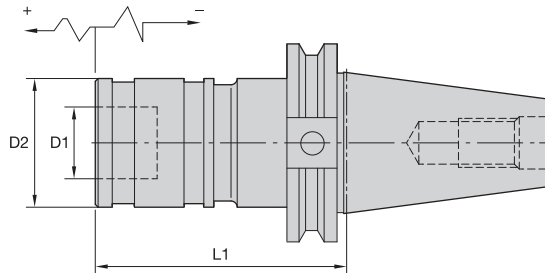
ERICKSON
RC-CV Form A

order number	catalogue number	adaptor size	tap size		D1	D2	L1	tension	compression	kg
			mm	in						
1615978	CV40TCRC1297	1	M1 - M14	#0 - 9/16	19	36	75	15,0	15,0	1,21
1615979	CV40TCRC2393	2	M5 - M24	5/16 - 7/8	31	53	98	25,0	25,0	1,62

NOTE: Quick-change tap adaptors are available and must be ordered separately; see page B32.

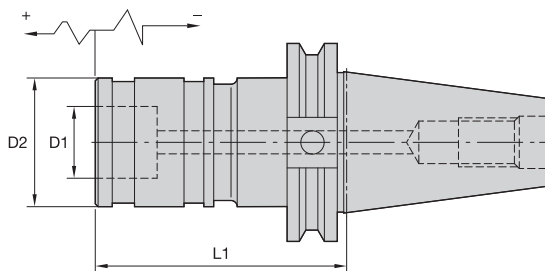
ERICKSON
RC Cool-CV Form AD


order number	catalogue number	adaptor size	tap size		D1	D2	L1	tension	compression	kg
			mm	in						
1615986	CV40HTCRC1382	1	M1 - M14	#0 - 9/16	19	36	97	15,0	15,0	1,41
1615987	CV40HTCRC2524	2	M5 - M24	5/16 - 7/8	31	53	133	20,0	20,0	2,40

NOTE: Quick-change tap adaptors are available and must be ordered separately; see page B32.

- Rapid Change style.



Tooling Systems

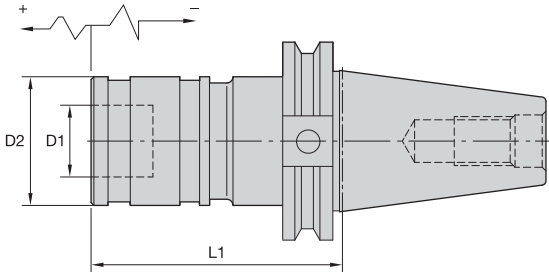


ERICKSON

RC-CV Form A

order number	catalogue number	adaptor size	tap size		D1	D2	L1	lbs
			mm	in				
1615981	CV50TCRC1297	1	M1 - M14	#0 - 9/16	.75	1.42	2.96	7.22
1615982	CV50TCRC2393	2	M5 - M24	5/16 - 7/8	1.22	2.09	3.86	8.00
1615983	CV50TCRC3516	3	M14 - M27	13/16 - 1 3/8	1.89	3.07	5.16	9.60

NOTE: Quick-change tap adaptors are available and must be ordered separately; see page B32.

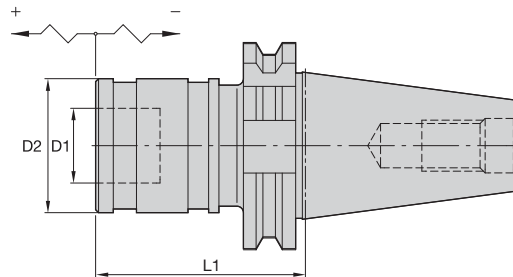


Tooling Systems

ERICKSON™

■ RC-DV Form A

order number	catalogue number	adaptor size	tap size		D1	D2	L1	tension	compression	kg
			mm	in						
1777397	DV40RC1060M	1	M1 - M14	#0 - 9/16	19	36	60	7,5	7,5	1,80
1777380	DV40RC2098M	2	M5 - M24	5/16 - 7/8	31	53	98	12,5	12,5	2,00
1777381	DV40RC3150M	3	M14 - M27	13/16 - 1 3/8	48	78	150	20,0	20,0	2,70

NOTE: Quick-change tap adaptors are available and must be ordered separately; see page B32.

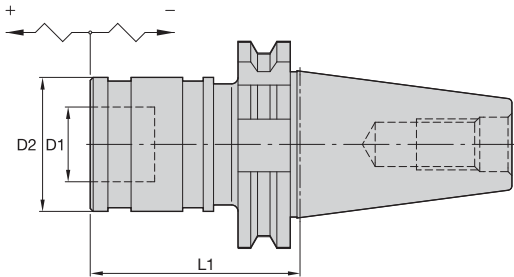


ERICKSON

RC-DV Form A

order number	catalogue number	adaptor size	tap size		D1	D2	L1	tension	compression	kg
			mm	in						
1777453	DV50RC1075M	1	M1 - M14	#0 - 9/16	19	36	75	7,5	7,5	2,90
1777455	DV50RC2084M	2	M5 - M24	5/16 - 7/8	31	53	85	12,5	12,5	3,70
1777540	DV50RC3139M	3	M14 - M27	13/16 - 1 3/8	48	78	139	20,0	20,0	4,50

NOTE: Quick-change tap adaptors are available and must be ordered separately; see page B32.

- Tremendous Grip (3:1 advantage).
- Anti-friction drive.
- Compact design.
- Adjustment hard start.

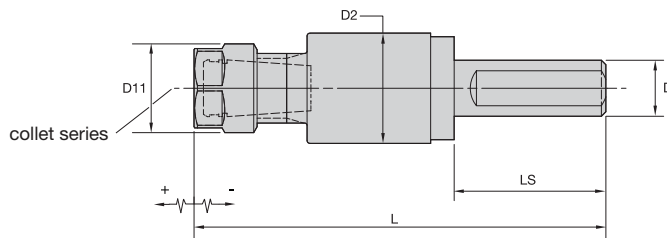


ERICKSON

■ TG Hex Tap T&C-SS IN



order number	catalogue number	collet series	D	D11	D2	L	LS	tension	compression	Collet Capacity			
										mm	inch	min	max
1288221	SS075TCTG050	TG50	3/4	1.22	1.48	5.48	2.00	.25	.30			1/32	17/32
		TG75								2,6	20,0	3/64	3/4
		TG100								2,6	25,5	5/64	1

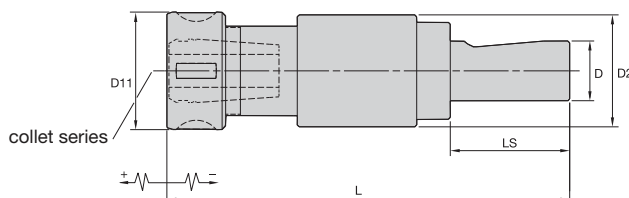

■ TG Round Tap T&C-SS IN



order number	catalogue number	collet series	D	D11	D2	L	LS	tension	compression	Collet Capacity			
										locknut	wrench	ft. lbs.	lbs
1288256	SS100TCTG075	TG75	1	1.97	1.88	6.79	2.20	.40	.43	LNA075M	HSW45M	100	1.50
1017625	SS150TCTG100756	TG100	1 1/2	2.36	2.50	7.56	2.68	.50	.13	LNA100M	HSW58M	150	2.12

NOTE: Collet must be loaded into locknut first. Before loading into the chuck body, insert the cutting tool, then tighten to the recommended tightening torque.
 Supplied with locknut.
 Locknut wrench must be ordered separately.
 Interchangeable locknuts, coolant-style locknuts, and coolant disks are available and must be ordered separately.

Collets and Sleeves


TG50 Single-Angle Solid Tap Collets



- For 50TGSTC, rubber-filled slots seal collet for coolant-fed tool applications.
- Can be used in all standard TG collet chucks.
- Provides Tremendous Grip (3:1 advantage) and accuracy for tapping applications.
- Slot in back of collets acts as a drive for the tap square.
- Industry-standard ERICKSON™ single-angle collet system.
- Manufactured to DIN 6499 Class 2 accuracy.



Tooling Systems

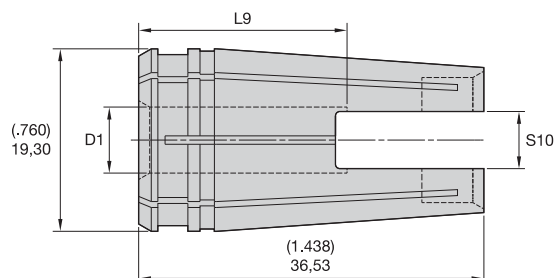

ERICKSON™

■ TG50 Solid Tap Collet • Metric DIN and ISO

tap size	50TGST solid tap — non-coolant/external coolant	collet series	D1	S10	L9
M1 & M1,8 & M3 & M3,5	50TGST025021M	TG50	2,5	2,1	17,0
M2,5 & M4	50TGST028021M	TG50	2,8	2,1	17,0
M3 & M4	50TGST032025M	TG50	3,2	2,5	17,0
M3 & M5	50TGST035027M	TG50	3,5	2,7	17,0
M4 & M5	50TGST040032M	TG50	4,0	3,2	17,0
M4 & M6	50TGST045034M	TG50	4,5	3,4	17,0
M5	50TGST050040M	TG50	5,0	4,0	17,0
M5 & M6 & M7 & M8	50TGST060049M	TG50	6,0	4,9	17,0
M6	50TGST063050M	TG50	6,3	4,9	17,0
M10	50TGST070055M	TG50	7,0	5,5	17,0
M7	50TGST071056M	TG50	7,1	5,6	17,0
M8	50TGST080062M	TG50	8,0	6,2	17,0
M12	50TGST090070M	TG50	9,0	7,0	17,0
M10	50TGST100080M	TG50	10,0	8,0	17,0
M14	50TGST110090M	TG50	11,0	9,0	17,0
M16	50TGST120090M	TG50	12,0	9,0	17,0

(continued)

(TG50 Single-Angle Solid Tap Collets continued)

■ TG50 Solid Tap Collet • Inch/Metric ANSI

tap size		50TGST solid tap – non-coolant/external coolant	50TGSTC solid tap – internal coolant supply	collet series	D1	S10	L9
mm	in						
M3 & M3,15 & M3,5	#0-#6 & 1/8	50TGST6	—	TG50	.141	.110	.775
M4	#8 & 5/32	50TGST8	—	TG50	.168	.131	.775
M4,5 & M5	#10 & 3/16	50TGST10	—	TG50	.194	.152	.900
—	#12 & 7/32	50TGST12	—	TG50	.220	.165	.807
M6 & M6,3	#14 & 1/4	50TGST025	50TGSTC025	TG50	.255	.191	.838
—	1/16P & 1/8P(SS)	50TGST006P	—	TG50	.313	.234	.775
M7 & M8	5/16	50TGST031	50TGSTC031	TG50	.318	.238	.868
—	7/16	50TGST043	50TGSTC043	TG50	.323	.242	.963
M12 & M12,5	1/2	50TGST050	50TGSTC050	TG50	.367	.275	.932
M10	3/8	50TGST037	50TGSTC037	TG50	.381	.286	.900
M14	9/16	50TGST056	50TGSTC056	TG50	.429	.322	.937
—	1/8P(LS)	50TGST012P	—	TG50	.438	.328	.775
M16	5/8	50TGST062	—	TG50	.480	.360	.876

NOTE: Inserting the cutting tool less than 2/3 of the gripping length into the collet can influence the coolant sealing performance and permanently damage the collet.
 Full length of the gripping bore needs to be maintained to achieve maximum accuracy and safety.
 Collet accuracies are based on size-for-size conditions.
 Using the collapsible range can influence the accuracy and gripping powers.
 Never try to stretch the collets by clamping oversized cutting tools.

Collets and Sleeves


TG75 Single-Angle Solid Tap Collets




- For 75TGSTC, rubber-filled slots seal collet for coolant-fed tool applications.
- Can be used in all standard TG collet chucks.
- Provides Tremendous Grip (3:1 advantage) and accuracy for all drilling applications.
- Industry-standard ERICKSON™ single-angle collet system.
- 0,13mm (.005") range of collapse.
- Grips on back taper and margin of drill for maximum feed rates and more accurate holes.
- Slot in back of collets acts as a drive for the tap square.
- Manufactured to DIN 6499 Class 2 accuracy.



Tooling Systems

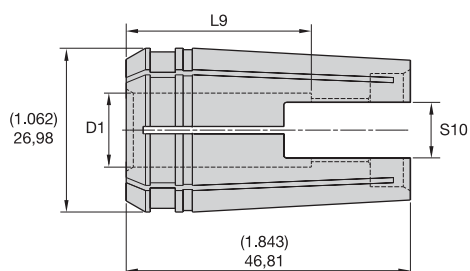

Coolant Type (Bonded)

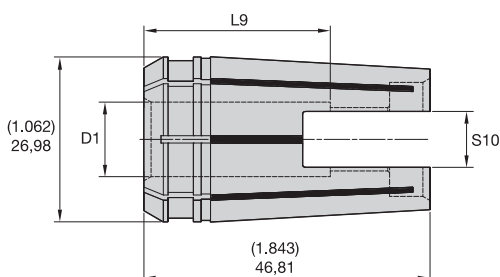

ERICKSON™

■ TG75 Solid Tap Collet • Solid Tap Coolant • Inch/Metric ANSI

mm	tap size	in	75TGST solid tap	75TGSTC solid tap — internal coolant supply	collet series	D1	S10	L9
M3 & M3,15 & M3,5	#0-#6 & 1/8		75TGST6	—	TG75	.141	.110	.775
M4	#8 & 5/32		75TGST8	—	TG75	.168	.131	.775
M4,5 & M5	#10 & 3/16		75TGST10	—	TG75	.194	.152	.900
—	#12 & 7/32		75TGST12	—	TG75	.220	.165	.807
M6 & M6,3	#14 & 1/4		75TGST025	75TGSTC025	TG75	.255	.191	.838
—	1/16P & 1/8P(SS)		75TGST006P	—	TG75	.313	.234	.775
M7 & M8	5/16		75TGST031	75TGSTC031	TG75	.318	.238	.868
—	7/16		75TGST043	75TGSTC043	TG75	.323	.242	.963

(continued)

(TG75 Single-Angle Solid Tap Collets continued)

tap size		75TGST	75TGSTC	collet	D1	S10	L9
mm	in	solid tap	solid tap — internal coolant supply	series			
M12 & M12,5	1/2	75TGST050	75TGSTC050	TG75	.367	.275	.932
M10	3/8	75TGST037	75TGSTC037	TG75	.381	.286	.900
M14	9/16	75TGST056	—	TG75	.429	.322	1.087
—	1/8P(LS)	75TGST012P	—	TG75	.438	.328	.775
M16	5/8	75TGST062	75TGSTC062	TG75	.480	.360	1.031
M18	11/16	75TGST068	75TGSTC068	TG75	.542	.406	.968
—	1/4P	75TGST025P	—	TG75	.563	.421	.775
—	3/4	75TGST075	75TGSTC075	TG75	.590	.442	.906
M20	13/16	75TGST081	—	TG75	.652	.489	.906
—	1/2P	75TGST050P	—	TG75	.688	.515	.775
M22	7/8	75TGST087	75TGSTC087	TG75	.697	.523	.843
—	3/8P	75TGST037P	—	TG75	.700	.531	.775

NOTE: Inserting the cutting tool less than 2/3 of the gripping length into the collet can influence the coolant sealing performance and permanently damage the collet.


Full length of the gripping bore needs to be maintained to achieve maximum accuracy and safety.

Collet accuracies are based on size-for-size conditions.

Using the collapsible range can influence the accuracy and gripping powers.

Never try to stretch the collets by clamping oversized cutting tools.

- For 100TGSTC, rubber-filled slots seal collet for coolant-fed tool applications.
- Can be used in all standard TG collet chucks.
- Provides Tremendous Grip (3:1 advantage) and accuracy for tapping applications.
- Slot in back of collets acts as a drive for the tap square.
- Industry-standard ERICKSON™ single-angle collet system.
- Manufactured to DIN 6499 Class 2 accuracy.

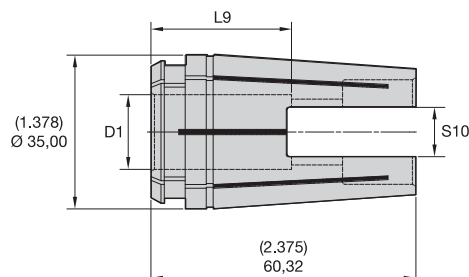

ERICKSON™

■ TG100 Solid Tap Collet • Metric DIN and ISO

tap size	catalogue number	collet series	D1	S10	L9
M9 & M12	100TGST090071M	TG100	9,0	7,1	30,0
M10	100TGST100080M	TG100	10,0	8,0	30,0
M14	100TGST110090M	TG100	11,0	9,0	30,0
M16	100TGST120090M	TG100	12,0	9,0	30,0
M18	100TGST140110M	TG100	14,0	11,0	30,0
M20	100TGST160120M	TG100	16,0	12,0	30,0
M22 & M24	100TGST180145M	TG100	18,0	14,5	30,0

■ TG100 Solid Tap Collet • Solid Tap Coolant • Inch/Metric ANSI

tap size		100TGST solid tap	100TGSTC solid tap — internal coolant supply	collet series	D1	S10	L9
mm	in						
M3 & M3,15 & M3,5	#0-#6 & 1/8	100TGST6	—	TG100	.141	.110	.141
M4	#8 & 5/32	100TGST8	—	TG100	.168	.131	.168
M4,5 & M5	#10 & 3/16	100TGST10	—	TG100	.194	.152	.194
—	#12 & 7/32	100TGST12	—	TG100	.220	.165	.220
M6 & M6,3	#14 & 1/4	100TGST025	—	TG100	.255	.191	.812
—	1/16P & 1/8P(SS)	100TGST006P	—	TG100	.313	.234	.812
M7 & M8	5/16	100TGST031	100TGSTC031	TG100	.318	.238	.868
—	7/16	100TGST043	100TGSTC043	TG100	.323	.242	.963
M12 & M12,5	1/2	100TGST050	100TGSTC050	TG100	.367	.275	.932
M10	3/8	100TGST037	100TGSTC037	TG100	.381	.286	.900
M14	9/16	100TGST056	—	TG100	.429	.322	1.087
—	1/8P(LS)	100TGST012P	—	TG100	.438	.328	.812
M16	5/8	100TGST062	100TGSTC062	TG100	.480	.360	1.087
M18	11/16	100TGST068	—	TG100	.542	.406	1.244

(continued)

(TG100 Single-Angle Solid Tap Collets continued)

tap size		100TGST solid tap	100TGSTC solid tap — internal coolant supply	collet series	D1	S10	L9
mm	in						
—	1/4P	100TGST025P	—	TG100	.563	.421	.812
—	3/4	100TGST075	100TGSTC075	TG100	.590	.442	1.213
M20	13/16	100TGST081	—	TG100	.652	.489	.652
—	1/2P	100TGST050P	—	TG100	.688	.515	.812
M22	7/8	100TGST087	—	TG100	.697	.523	.697
M22	7/8	—	100TGSTC087	TG100	.697	.523	1.369
—	3/8P	100TGST037P	—	TG100	.700	.531	.812
M24	15/16	100TGST094	—	TG100	.760	.570	.760
M25	1	—	100TGSTC100	TG100	.800	.600	1.313
M25	1	100TGST100	—	TG100	.800	.600	.800
M27	1 1/16 & 1 1/8	100TGST112	—	TG100	.896	.672	.896
—	3/4P	100TGST075P	—	TG100	.906	.679	.812

NOTE: Inserting the cutting tool less than 2/3 of the gripping length into the collet can influence the coolant sealing performance and permanently damage the collet.



Full length of the gripping bore needs to be maintained to achieve maximum accuracy and safety.

Collet accuracies are based on size-for-size conditions.

Using the collapsible range can influence the accuracy and gripping powers.

Never try to stretch the collets by clamping oversized cutting tools.

- Can be used in all standard TG collet chucks.
- Provides Tremendous Grip (3:1 advantage) and accuracy for tapping applications.
- Slot in back of collets acts as a drive for the tap square.
- Industry-standard ERICKSON™ single-angle collet system.

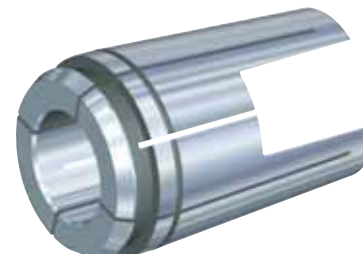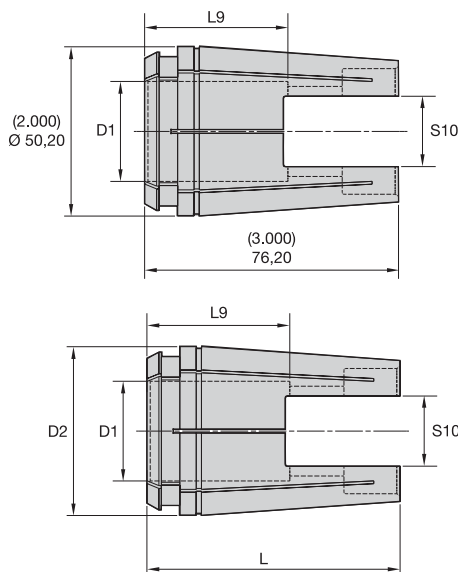

ERICKSON™

■ TG150 Solid Tap Collet • Metric DIN and ISO

*** Metric DIN and ISO only available in TG50 and TG100 series; see pages B22 and B26. ***

■ TG150 Solid Tap Collet • Inch/Metric ANSI

tap size		150TGST solid tap	collet series	D1	S10	L9
mm	in					
—	3/4	150TGST075	TG150	.590	.442	1.213
—	1/2P	150TGST050P	TG150	.688	.515	.812
—	3/8P	150TGST037P	TG150	.700	.531	.812
M25	1	150TGST100	TG150	.800	.600	1.463
M27	1 1/16 & 1 1/8	150TGST112	TG150	.896	.672	1.650
—	3/4P	150TGST075P	TG150	.906	.679	.906
M30	1 3/16 & 1 1/4	150TGST125	TG150	1.021	.766	1.750
M33	1 5/16 & 1 3/8	150TGST137	TG150	1.108	.831	1.687
—	1P	150TGST100P	TG150	1.125	2.142	.906
M36	1 7/16 & 1 1/2	150TGST150	TG150	1.233	.925	1.625
M39	1 5/8	150TGST162	TG150	1.305	.979	1.625
—	1 1/4P	150TGST125P	TG150	1.313	2.085	.963
M42	1 3/4	150TGST175	TG150	1.430	1.072	1.500
—	1 1/2P	150TGST150P	TG150	1.500	1.898	1.150

NOTE: Inserting the cutting tool less than 2/3 of the gripping length into the collet can influence the coolant sealing performance and permanently damage the collet.


Full length of the gripping bore needs to be maintained to achieve maximum accuracy and safety.

Collet accuracies are based on size-for-size conditions.

Using the collapsible range can influence the accuracy and gripping powers.

Never try to stretch the collets by clamping oversized cutting tools.

- Square in back of collet acts as a drive for the tap square.
- Can be used in all standard ER collet chucks.
- Available in metric and inch sizes.

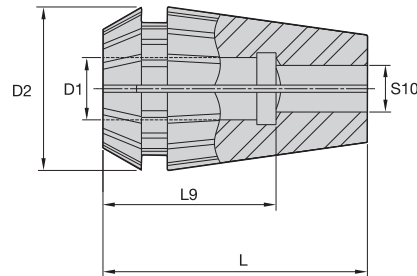

Tooling Systems

ERICKSON™

■ ER Solid Tap Collet • Metric DIN and ISO

tap size	ER16 D2 = 17mm L = 27,5mm	ER20 D2 = 21mm L = 31,5mm	ER25 D2 = 26mm L = 34mm	ER32 D2 = 33mm L = 40mm	ER40 D2 = 41mm L = 46mm	D1	S10	L9
M4 & M6	16ERTC045034M	20ERTC045034M	25ERTC045034M	32ERTC045034M	—	4,5	3,4	18
—	16ERTC055043M	20ERTC055043M	25ERTC055043M	32ERTC055043M	—	5,5	4,3	18
M5 & M6 & M7 & M8	16ERTC060049M	20ERTC060049M	25ERTC060049M	32ERTC060049M	—	6,0	4,9	18
M10	16ERTC070055M	20ERTC070055M	25ERTC070055M	32ERTC070055M	40ERTC070055M	7,0	5,5	18
M8	16ERTC080062M	20ERTC080062M	25ERTC080062M	32ERTC080062M	40ERTC080062M	8,0	6,2	22
M12	16ERTC090070M	20ERTC090070M	25ERTC090070M	32ERTC090070M	40ERTC090070M	9,0	7,0	22
M10	—	20ERTC100080M	25ERTC100080M	32ERTC100080M	40ERTC100080M	10,0	8,0	25
M14	—	20ERTC110090M	25ERTC110090M	32ERTC110090M	40ERTC110090M	11,0	9,0	25
M16	—	—	25ERTC120090M	32ERTC120090M	40ERTC120090M	12,0	9,0	25
M18	—	—	—	32ERTC140110M	40ERTC140110M	14,0	11,0	25
—	—	—	25ERTC140110M	—	—	14,0	11,0	25
M20	—	—	—	32ERTC160120M	—	16,0	12,0	25
—	—	—	25ERTC160120M	—	—	16,0	12,0	25
M20	—	—	—	—	40ERTC160120M	16,0	12,0	25
M22 & M24	—	—	—	32ERTC180145M	40ERTC180145M	18,0	14,5	25
M27 & M30	—	—	—	32ERTC200160M	40ERTC200160M	20,0	16,0	28
M30	—	—	—	—	40ERTC220180M	22,0	18,0	28

(continued)

(ER Single-Angle Solid Tap Collets continued)

■ ER Solid Tap Collet • Inch/Metric ANSI

tap size		ER16 D2 = .669 L = 1.083	ER20 D2 = .827 L = 1.240	ER25 D2 = 1.024 L = 1.339	ER32 D2 = 1.299 L = 1.575	ER40 D2 = 1.614 L = 1.811	D1	S10	L9
mm	in								
M4	#8 & 5/32	16ERTC8	20ERTC8	25ERTC8	32ERTC8	—	.168	.131	.710
M4,5 & M5	#10 & 3/16	16ERTC10	20ERTC10	25ERTC10	32ERTC10	—	.194	.152	.710
—	#12 & 7/32	16ERTC12	20ERTC12	25ERTC12	32ERTC12	—	.220	.165	.710
M6 & M6,3	#14 & 1/4	16ERTC025	20ERTC025	25ERTC025	32ERTC025	40ERTC025	.255	.191	.710
M7 & M8	5/16	—	20ERTC031	25ERTC031	32ERTC031	40ERTC031	.318	.238	.866
—	7/16	—	20ERTC043	25ERTC043	32ERTC043	40ERTC043	.323	.242	.866
M12 & M12,5	1/2	—	20ERTC050	25ERTC050	32ERTC050	40ERTC050	.367	.275	.866
M10	3/8	—	20ERTC037	25ERTC037	32ERTC037	40ERTC037	.381	.286	.866
M14	9/16	—	—	25ERTC056	32ERTC056	40ERTC056	.429	.322	.984
M16	5/8	—	—	25ERTC062	32ERTC062	40ERTC062	.480	.360	.984
M18	11/16	—	—	—	32ERTC069	40ERTC069	.542	.406	.984
—	3/4	—	—	—	32ERTC075	—	.590	.422	.984
—	3/4	—	—	—	—	40ERTC075	.590	.442	.984
M20	13/16	—	—	—	32ERTC081	40ERTC081	.652	.489	.984
M22	7/8	—	—	—	—	40ERTC087	.697	.523	.984
M24	15/16	—	—	—	—	40ERTC093	.760	.570	1.100
M25	1	—	—	—	—	40ERTC100	.800	.600	1.100

NOTE: Inserting the cutting tool less than 2/3 the gripping length into the collet can permanently damage the collet.


Full length of the gripping bore must be maintained to achieve maximum accuracy and safety.

Collet accuracies are based on size-for-size conditions.

Using the collapsible range can influence the accuracy and gripping powers.

Never try to stretch the collets by clamping oversized cutting tools.

- Tension feature for applications that need synchronised tapping.
- Adjustable screws in back of collet act as a drive for the tap square.
- Can be used in all standard ER collet chucks.
- Available in inch sizes.

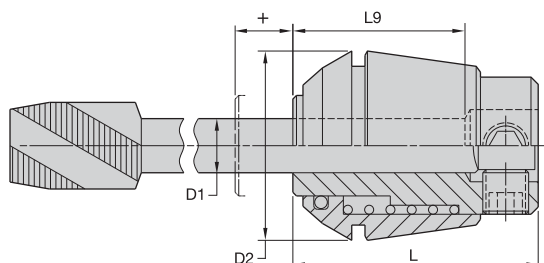
ERICKSON

collet series	+	L9
12ER	5,5	18
16ER	7,0	22
20ER	7,0	24
25ER	8,0	26
32ER	10,0	33
40ER	13,0	42

■ ER T-Only Tap Collet • Inch/Metric ANSI

tap size		ER12 D2 = 11,4mm L = 21,5mm	ER16 D2 = 17mm L = 27,5mm	ER20 D2 = 21mm L = 31,5mm	ER25 D2 = 26mm L = 34mm	ER32 D2 = 33mm L = 40mm	ER40 D2 = 41mm L = 46mm	D1	
mm	in							mm	in
M3 & M3,15 & M3,5	#0-#6 & 1/8	12ERTCT6	16ERTCT6	20ERTCT6	25ERTCT6	—	—	3,58	.141
M4	#8 & 5/32	—	16ERTCT8	20ERTCT8	25ERTCT8	32ERTCT8	—	4,27	.168
M4,5 & M5	#10 & 3/16	—	16ERTCT10	20ERTCT10	25ERTCT10	32ERTCT10	—	4,93	.194
—	#12 & 7/32	—	—	20ERTCT12	25ERTCT12	32ERTCT12	—	5,59	.220
M6 & M6,3	#14 & 1/4	—	—	20ERTCT025	25ERTCT025	32ERTCT025	40ERTCT025	6,48	.255
M7 & M8	5/16	—	—	—	25ERTCT031	32ERTCT031	40ERTCT031	8,08	.318
—	7/16	—	—	—	25ERTCT043	32ERTCT043	40ERTCT043	8,20	.323
M12 & M12,5	1/2	—	—	—	25ERTCT050	32ERTCT050	40ERTCT050	9,32	.367
M10	3/8	—	—	—	25ERTCT037	32ERTCT037	40ERTCT037	9,68	.381
M14	9/16	—	—	—	—	32ERTCT056	40ERTCT056	10,90	.429
—	1/8P(LS)	—	—	—	—	32ERTCT012P	—	11,10	.437
M16	5/8	—	—	—	—	32ERTCT062	40ERTCT062	12,19	.480
M18	11/16	—	—	—	—	—	40ERTCT069	13,77	.542
—	3/4	—	—	—	—	—	40ERTCT075	14,99	.590
M20	13/16	—	—	—	—	—	40ERTCT081	16,56	.652
M22	7/8	—	—	—	—	—	40ERTCT087	17,70	.697

NOTE: 12ERTCT6 fits ER11 chucks.

Full length of the gripping bore must be maintained to achieve maximum accuracy and safety.

ERICKSON™ RC Rapid Quick-Change Tap Adaptors • Tapping

ERICKSON RC Rapid Quick-Change Tap Adaptors are convenient for hand changes with taps within seconds. No wrenches or locknuts are required. For this positive drive tap adaptor, simply hold the tap in place with internal locking balls and drive on the tap square.




RC

Features and Benefits

- Compact Rapid Change by hand design.
- Solid positive drive.
- Coolant through the tap design.


ERICKSON

- Rapid Change style.
- Solid-positive drive.
- Coolant capability by using cutting tool with coolant feature.
- For taps with DIN, ISO, and ANSI specifications.

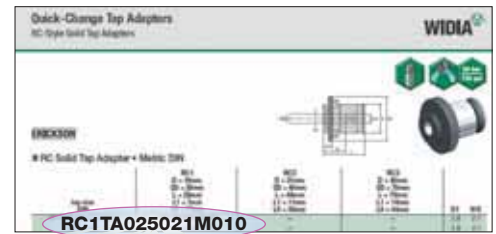

ERICKSON

RC1	TA	025	021	M	010
System Size	Collet Style	Collet Bore Size	Collet Drive Size	Identification Value	Tap Size
RC1 = RC1 RC2 = RC2 RC3 = RC3	TA = Tap Adaptor	metric (xx.x) 025 = 2,5mm 110 = 11mm 245 = 24,5mm inch (x.xxx) 0125 = 1/8" 0500 = 1/2"	metric (xx.x) 010 = 1mm 160 = 16mm 245 = 24,5mm inch (x.xxx) 0125 = 1/8" 0500 = 1/2" 1000 = 1"	M = Sleeve bore size built to metric values IN = Sleeve bore size built to inch values	metric (xx.x) 010 = 1mm 160 = 16mm 245 = 24,5mm inch (x.xxx) 0125 = 1/8" 0500 = 1/2" 1000 = 1"



Quick-Change Tap Adaptors


RC-Style Solid Tap Adaptors



- Rapid Change style.
- Solid-positive drive.
- Coolant capability by using cutting tool with coolant feature.
- For taps with DIN, ISO, and ANSI specifications.



Tooling Systems

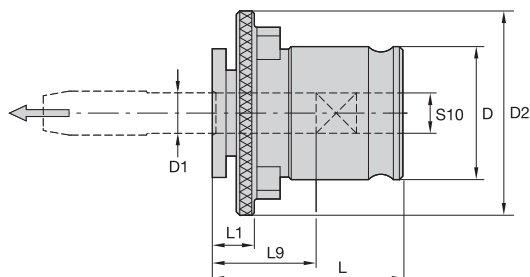

ERICKSON

RC Solid Tap Adaptor • Metric DIN

tap size DIN	RC1 D = 19mm D2 = 30mm L = 28mm L1 = 7mm L9 = 17mm	RC2 D = 31mm D2 = 48mm L = 46mm L1 = 11mm L9 = 30mm	RC3 D = 48mm D2 = 70mm L = 70mm L1 = 14mm L9 = 44mm	D1	S10
M1 & M1.8 & M3 & M3.5	RC1TA025021M010	—	—	2,5	2,1
M2.5 & M4	RC1TA028021M020	—	—	2,8	2,1
M3 & M5	RC1TA035027M030	—	—	3,5	2,7
M3.5	RC1TA040030M035	—	—	4,0	3,0
M4 & M6	RC1TA045034M040	—	—	4,5	3,4
M4	—	RC2TA045034M040	—	4,5	3,4
M5 & M6 & M7 & M8	RC1TA060049M050	RC2TA060049M050	—	6,0	4,9
M10	RC1TA070055M100	RC2TA070055M100	—	7,0	5,5
M8	RC1TA080062M080	RC2TA080062M080	—	8,0	6,2
M12	RC1TA090070M120	RC2TA090070M120	—	9,0	7,0
M10	RC1TA100080M100	RC2TA100080M100	—	10,0	8,0
M14	RC1TA110090M140	RC2TA110090M140	RC3TA110090M140	11,0	9,0
M16	—	—	RC3TA120090M160	12,0	9,0
M16	—	RC2TA120090M160	—	12,9	9,0
M18	—	RC2TA140110M180	RC3TA140110M180	14,0	11,0
M20	—	RC2TA160120M200	RC3TA160120M200	16,0	12,0
M22 & M24	—	RC2TA180145M220	—	18,0	4,5
—	—	—	RC3TA180140M240	18,0	14,0
M22 & M24	—	—	RC3TA180145M240	18,0	14,5
M27	—	—	RC3TA200160M300	20,0	16,0
M30	—	—	RC3TA220180M300	22,0	18,0
M33	—	—	RC3TA250200M360	25,0	20,0
M36	—	—	RC3TA280220M360	28,0	22,0

(continued)

(RC-Style Solid Tap Adaptors continued)

■ RC Solid Tap Adaptor • Metric ISO

tap size	RC1 D = 19mm D2 = 30mm L = 28mm L1 = 7mm L9 = 17mm	RC2 D = 31mm D2 = 48mm L = 46mm L1 = 11mm L9 = 30mm	RC3 D = 48mm D2 = 70mm L = 70mm L1 = 14mm L9 = 44mm	D1	S10
M3	RC1TA023018M030	—	—	2,24	1,80
M2.2 & M2.5	RC1TA028023M025	—	—	2,80	2,24
M3 & M4	RC1TA032025M030	—	—	3,15	2,50
M3.5 & M4.5	RC1TA036028M035	—	—	3,55	2,80
M4 & M5	RC1TA040032M040	—	—	4,00	3,15
M4.5 & M6	RC1TA045036M060	RC2TA045036M060	—	4,50	3,55
M5	RC1TA050040M050	RC2TA050040M050	—	5,00	4,00
—	RC1TA056045M000	—	—	5,60	4,50
M6 & M8	RC1TA063050M060	RC2TA063050M060	—	6,30	5,00
M7	RC1TA071056M070	RC2TA071056M070	—	7,10	5,60
M8 & M10 & M11	RC1TA080063M080	RC2TA080063M080	—	8,00	6,30
M9 & M12	RC1TA090071M090	—	—	9,00	7,10
M9 & M12	—	RC2TA090071M090	—	9,00	7,10
M14	RC1TA112090M140	RC2TA112090M140	RC3TA112090M140	11,20	9,00
M16	—	RC2TA125100M160	—	12,50	10,00
M18 & M20	—	RC2TA140112M180	—	14,00	11,20
M22	—	RC2TA160125M220	RC3TA160125M220	16,00	12,50
M24	—	RC2TA180140M240	—	18,00	14,00
M33	—	—	RC3TA224180M330	22,40	18,00

(continued)

(RC-Style Solid Tap Adaptors continued)

■ RC Solid Tap Adaptor • Inch/Metric ANSI

tap size		RC1 D = .750 D2 = 1.180 L = 1.100 L1 = .280	RC2 D = 1.220 D2 = 1.890 L = 1.810 L1 = .430	RC3 D = 1.890 D2 = 2.760 L = 2.760 L1 = .550	D1	S10
mm	in					
M3 & M3.18 & M3.5	#0 - #6 UNC/UNF	T11006	—	—	.141	.110
M4	#8 UNC/UNF	T11007	—	—	.168	.131
M4.5 & M5	#10 UNC/UNF	T11008	—	—	.194	.152
—	#12 UNC/UNF	T11009	—	—	.220	.165
M6 & M6.3	1/4 UNC/UNF	T11010	—	—	.255	.191
—	—	T110166	—	—	.313	.234
M7 & M8	5/16 UNC/UNF	T11012	T21018	—	.318	.238
—	7/16 UNC/UNF	T11014	T21020	—	.323	.242
M12 & M12.5	1/2 UNC/UNF	T11015	T21021	—	.367	.275
M10	3/8 UNC/UNF	T11013	T21019	—	.381	.286
M14	9/16 UNC/UNF	T110155	T21022	—	.429	.322
—	—	T110177	—	—	.438	.328
M16	5/8 UNC/UNF	—	T21023	—	.480	.360
M18	11/16 UNC/UNF	—	T21024	—	.542	.406
—	—	—	T210288	—	.563	.421
—	3/4 UNC/UNF	—	T21025	—	.590	.442
M20	13/16 UNC/UNF	—	T21026	T31031	.652	.489
—	—	—	T210300	T310387	.688	.515
M22	7/8 UNC/UNF	—	T21027	T31032	.697	.523
—	—	—	T210299	—	.700	.531
M24	15/16 UNC/UNF	—	—	T31033	.760	.570
M25	1 UNC/UNF	—	—	T31034	.800	.600
M27	1 1/8 UNC/UNF	—	—	T31035	.896	.672
—	—	—	—	T310388	.906	.679
—	1 1/4 UNC/UNF	—	—	T31036	1.021	.766
M30	1 3/8 UNC/UNF	—	—	T31037	1.108	.831
—	—	—	—	T310389	1.125	.843

- An economical way to purchase a set of RC tap adaptors.
- Rapid Change style.
- Solid-positive drive.
- Coolant capability by using cutting tool with coolant feature.



ERICKSON™

■ RC Solid Tap Adaptor Set • Inch

catalogue number	series	quantity	dimensional range
T1SET	RC1	10	#0 - 9/16
T2SET	RC2	10	5/16 - 7/8

Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)
1013485	...LNA100M	...B21	1017268	...75TGST025	...B24	1017505	...100TGST037P	...B27	1026428	...20ERTC031	...B30
1013486	...LNA075M	...B21	1017269	...75TGST031	...B24	1017506	...100TGST050P	...B27	1026429	...20ERTC043	...B30
1014086	...100TGST100080M	...B26	1017270	...75TGST037	...B25	1017507	...100TGST075P	...B27	1026430	...20ERTC050	...B30
1014087	...100TGST110090M	...B26	1017271	...75TGST043	...B24	1017508	...150TGST100	...B28	1026431	...20ERTC037	...B30
1014088	...100TGST120090M	...B26	1017272	...75TGST050	...B25	1017509	...150TGST112	...B28	1026432	...25ERTC8	...B30
1014089	...100TGST140110M	...B26	1017273	...75TGST056	...B25	1017510	...150TGST125	...B28	1026433	...25ERTC10	...B30
1014090	...100TGST160120M	...B26	1017324	...75TGST062	...B25	1017511	...150TGST137	...B28	1026444	...25ERTC12	...B30
1014091	...100TGST180145M	...B26	1017325	...75TGST068	...B25	1017512	...150TGST150	...B28	1026445	...25ERTC025	...B30
1014092	...100TGST090071M	...B26	1017326	...75TGST075	...B25	1017513	...150TGST162	...B28	1026446	...25ERTC031	...B30
1016963	...50TGST6	...B23	1017327	...75TGST081	...B25	1017574	...150TGST175	...B28	1026447	...25ERTC043	...B30
1017014	...50TGST8	...B23	1017328	...75TGST087	...B25	1017575	...150TGST075P	...B28	1026448	...25ERTC050	...B30
1017015	...50TGST10	...B23	1017329	...75TGST006P	...B24	1017576	...150TGST100P	...B28	1026449	...25ERTC037	...B30
1017016	...50TGST12	...B23	1017330	...75TGST012P	...B25	1017577	...150TGST125P	...B28	1026450	...25ERTC056	...B30
1017017	...50TGST025	...B23	1017331	...75TGST025P	...B25	1017578	...150TGST150P	...B28	1026451	...25ERTC062	...B30
1017018	...50TGST031	...B23	1017332	...75TGST037P	...B25	1017625	...SS150TCTG100756	...B21	1026452	...32ERTC8	...B30
1017019	...50TGST037	...B23	1017333	...75TGST050P	...B25	1020290	...NPA050	...B21	1026453	...32ERTC10	...B30
1017020	...50TGST043	...B23	1017384	...100TGST6	...B26	1023476	...T1SET	...B37	1026454	...32ERTC12	...B30
1017021	...50TGST050	...B23	1017385	...100TGST8	...B26	1025553	...0EW106	...B21	1026455	...32ERTC025	...B30
1017022	...50TGST056	...B23	1017386	...100TGST10	...B26	1026369	...16ERTCT6	...B31	1026456	...32ERTC031	...B30
1017023	...50TGST062	...B23	1017387	...100TGST12	...B26	1026370	...16ERTCT8	...B31	1026457	...32ERTC043	...B30
1017074	...50TGST006P	...B23	1017388	...100TGST025	...B26	1026371	...16ERTCT10	...B31	1026458	...32ERTC050	...B30
1017075	...50TGST012P	...B23	1017389	...100TGST031	...B26	1026372	...20ERTCT025	...B31	1026459	...32ERTC037	...B30
1017083	...50TGST025021M	...B22	1017390	...100TGST037	...B26	1026373	...25ERTCT10	...B31	1026460	...32ERTC056	...B30
1017134	...50TGST028021M	...B22	1017391	...100TGST043	...B26	1026394	...25ERTCT031	...B31	1026461	...32ERTC062	...B30
1017135	...50TGST035027M	...B22	1017392	...100TGST050	...B26	1026395	...32ERTCT10	...B31	1026462	...32ERTC069	...B30
1017137	...50TGST040032M	...B22	1017393	...100TGST056	...B26	1026396	...32ERTCT025	...B31	1026463	...32ERTC075	...B30
1017139	...50TGST045034M	...B22	1017454	...100TGST062	...B26	1026397	...32ERTCT031	...B31	1026474	...32ERTC081	...B30
1017140	...50TGST060049M	...B22	1017455	...100TGST068	...B26	1026398	...32ERTCT050	...B31	1026475	...40ERTC025	...B30
1017142	...50TGST070055M	...B22	1017456	...100TGST075	...B27	1026399	...32ERTCT012P	...B31	1026476	...40ERTC031	...B30
1017204	...50TGST080062M	...B22	1017457	...100TGST081	...B27	1026400	...16ERTC8	...B30	1026477	...40ERTC043	...B30
1017208	...50TGST090070M	...B22	1017458	...100TGST087	...B27	1026401	...16ERTC10	...B30	1026478	...40ERTC050	...B30
1017209	...50TGST100080M	...B22	1017459	...100TGST094	...B27	1026402	...16ERTC12	...B30	1026479	...40ERTC037	...B30
1017210	...50TGST110090M	...B22	1017460	...100TGST100	...B27	1026403	...16ERTC025	...B30	1026480	...40ERTC056	...B30
1017264	...75TGST6	...B24	1017461	...100TGST112	...B27	1026424	...20ERTC8	...B30	1026481	...40ERTC062	...B30
1017265	...75TGST8	...B24	1017462	...100TGST006P	...B26	1026425	...20ERTC10	...B30	1026482	...40ERTC069	...B30
1017266	...75TGST10	...B24	1017463	...100TGST012P	...B26	1026426	...20ERTC12	...B30	1026483	...40ERTC075	...B30
1017267	...75TGST12	...B24	1017504	...100TGST025P	...B27	1026427	...20ERTC025	...B30	1026494	...40ERTC081	...B30

Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)
1026495	...40ERTC087	B30	1092349	...25ERTCT8	B31	1125812	...BT40RC2094M	B15	1128802	...40ERTC180145M	B29
1026496	...40ERTC093	B30	1092471	...32ERTCT037	B31	1125829	...BT40RC1067M	B15	1128863	...32ERTC080062M	B29
1026497	...40ERTC100	B30	1092472	...32ERTCT043	B31	1125852	...RC1TA045036M060	B35	1129582	...RC1TA036028M035	B35
1075158	...40ERTCT075	B31	1092473	...32ERTCT056	B31	1125882	...RC3TA200160M300	B34	1129583	...32ERTC100080M	B29
1080489	...25ERTCT043	B31	1092474	...32ERTCT062	B31	1125890	...RC2TA070055M100	B34	1129714	...40ERTC120090M	B29
1084368	...50TGSTC050	B23	1092475	...32ERTCT12	B31	1125896	...RC2TA090071M090	B35	1129731	...32ERTC090070M	B29
1084369	...50TGSTC037	B23	1092476	...32ERTCT8	B31	1126238	...RC2TA180145M220	B34	1129818	...RC2TA112090M140	B35
1084370	...50TGSTC025	B23	1092493	...40ERTCT025	B31	1126244	...32ERTC070055M	B29	1130128	...40ERTC100080M	B29
1084492	...50TGSTC031	B23	1092495	...40ERTCT031	B31	1126271	...KM63TSTC2095M	B12	1130140	...25ERTC120090M	B29
1084493	...50TGSTC043	B23	1092496	...40ERTCT037	B31	1126272	...KM63TSTC3147M	B12	1130155	...40ERTC200160M	B29
1084514	...50TGSTC056	B23	1092497	...40ERTCT043	B31	1126646	...RC1TA063050M060	B35	1130521	...40ERTC080062M	B29
1086524	...75TGSTC025	B24	1092498	...40ERTCT050	B31	1127007	...RC1TA080063M080	B35	1131226	...RC2TA090070M120	B34
1086525	...75TGSTC031	B24	1092499	...40ERTCT056	B31	1127021	...RC1TA040030M035	B34	1131235	...RC1TA100080M100	B34
1086526	...75TGSTC037	B25	1092500	...40ERTCT062	B31	1127030	...RC3TA280220M360	B34	1131652	...RC2TA080062M080	B34
1086527	...75TGSTC043	B24	1092501	...40ERTCT069	B31	1127044	...RC3TA140110M180	B34	1132318	...25ERTC100080M	B29
1086528	...75TGSTC050	B25	1092502	...40ERTCT081	B31	1127114	...25ERTC045034M	B29	1132337	...RC1TA080062M080	B34
1086530	...75TGSTC062	B25	1092503	...40ERTCT087	B31	1127139	...25ERTC070055M	B29	1132345	...RC1TA028021M020	B34
1086531	...75TGSTC068	B25	1092699	...50TGST032025M	B22	1127889	...BT50RC2102M	B16	1132352	...RC2TA110090M140	B34
1086532	...75TGSTC075	B25	1092702	...50TGST050040M	B22	1127899	...RC2TA125100M160	B35	1135816	...BT50RC3141M	B16
1086544	...75TGSTC087	B25	1092704	...50TGST063050M	B22	1127903	...RC1TA035027M030	B34	1135979	...40ERTC140110M	B29
1086547	...100TGSTC031	B26	1092705	...50TGST071056M	B22	1127911	...RC1TA040032M040	B35	1135985	...40ERTC160120M	B29
1086548	...100TGSTC037	B26	1092708	...50TGST120090M	B22	1128100	...RC1TA025021M010	B34	1138470	...RC3TA250200M360	B34
1086549	...100TGSTC043	B26	1120808	...RC1TA070055M100	B34	1128193	...16ERTC070055M	B29	1138499	...RC2TA140110M180	B34
1086550	...100TGSTC050	B26	1120816	...32ERTC120090M	B29	1128251	...RC3TA160125M220	B35	1138531	...RC3TA160120M200	B34
1086552	...100TGSTC062	B26	1121176	...RC2TA045036M060	B35	1128371	...RC1TA028023M025	B35	1138564	...RC2TA060049M050	B34
1086574	...100TGSTC075	B27	1121413	...RC1TA023018M030	B35	1128372	...RC1TA056045M000	B35	1138585	...RC3TA224180M330	B35
1086576	...100TGSTC087	B27	1121580	...32ERTC055043M	B29	1128404	...25ERTC055043M	B29	1138600	...RC2TA140112M180	B35
1086578	...100TGSTC100	B27	1122637	...32ERTC060049M	B29	1128485	...32ERTC140110M	B29	1138609	...RC2TA063050M060	B35
1092259	...12ERTCT6	B31	1122657	...40ERTC090070M	B29	1128546	...RC1TA060049M050	B34	1138618	...RC2TA050040M050	B35
1092298	...20ERTCT10	B31	1123676	...25ERTC110090M	B29	1128553	...RC2TA045034M040	B34	1138641	...RC2TA160125M220	B35
1092299	...20ERTCT12	B31	1123715	...25ERTC060049M	B29	1128578	...RC1TA045034M040	B34	1138653	...RC2TA080063M080	B35
1092300	...20ERTCT6	B31	1123744	...25ERTC080062M	B29	1128586	...RC2TA120090M160	B34	1138660	...RC1TA090071M090	B35
1092301	...20ERTCT8	B31	1123960	...40ERTC110090M	B29	1128590	...RC2TA160120M200	B34	1138664	...RC1TA050040M050	B35
1092344	...25ERTCT025	B31	1124054	...32ERTC110090M	B29	1128599	...RC2TA180140M240	B35	1138672	...RC3TA180140M240	B34
1092345	...25ERTCT037	B31	1124519	...16ERTC060049M	B29	1128606	...RC1TA090070M120	B34	1138680	...RC1TA110090M140	B34
1092346	...25ERTCT050	B31	1124663	...RC3TA180145M240	B34	1128789	...25ERTC090070M	B29	1138687	...RC3TA220180M300	B34
1092348	...25ERTCT6	B31	1125101	...16ERTC045034M	B29	1128795	...32ERTC160120M	B29	1138732	...RC2TA100080M100	B34

Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)
1152158	...32ERTC045034M	B29	1291422	...T21027	B36	1777380	...DV40RC2098M	B19	3494719	...12738 GP4535	A78
1152394	...20ERTC100080M	B29	1291423	...T210288	B36	1777381	...DV40RC3150M	B19	3494720	...12739 GP4535	A78
1155335	...40ERTC070055M	B29	1291424	...T210299	B36	1777397	...DV40RC1060M	B19	3494721	...12740 GP4535	A78
1175962	...20ERTC060049M	B29	1291425	...T210300	B36	1777453	...DV50RC1075M	B20	3494722	...12741 GP4535	A78
1179207	...RC3TA110090M140	B34	1291553	...T31031	B36	1777455	...DV50RC2084M	B20	3494746	...12826 GP4535	A79
1180077	...RC1TA032025M030	B35	1291554	...T31032	B36	1777540	...DV50RC3139M	B20	3494747	...12827 GP4535	A79
1185973	...RC3TA120090M160	B34	1291555	...T31033	B36	1778908	...BT50RC1075M	B16	3494748	...12828 GP4535	A79
1192229	...HSW45M	B21	1291556	...T31034	B36	1788048	...25ERTCT12	B31	3494749	...12829 GP4535	A79
1192230	...HSW58M	B21	1291557	...T31035	B36	1835938	...16ERTC080062M	B29	3494750	...12830 GP4535	A79
1192400	...RC1TA071056M070	B35	1291558	...T31036	B36	1876644	...25ERTC160120M	B29	3527626	...12906 GN1515	A80
1192401	...RC2TA071056M070	B35	1291559	...T31037	B36	1897967	...25ERTC140110M	B29	3527627	...12907 GN1515	A80
1255022	...T11012	B36	1291560	...T310387	B36	1923779	...20ERTC110090M	B29	3527628	...12908 GN1515	A80
1284998	...RC1TA112090M140	B35	1291561	...T310388	B36	2046537	...16ERTC090070M	B29	3527629	...12909 GN1515	A80
1285008	...RC3TA112090M140	B35	1291562	...T310389	B36	2046538	...32ERTC180145M	B29	3527630	...12911 GN1515	A80
1288221	...SS075TCTG050	B21	1295593	...16ERTC055043M	B29	2046539	...32ERTC200160M	B29	3527631	...12912 GN1515	A80
1288256	...SS100TCTG075	B21	1307508	...20ERTC070055M	B29	3094221	...12227 GP4535	A76	3527632	...12914 GN1515	A80
1291352	...T11006	B36	1307509	...20ERTC090070M	B29	3170944	...12225 GP4535	A76	3527633	...12915 GN1515	A80
1291353	...T11007	B36	1520637	...HSK63ACHRC1105M	B13	3170945	...12226 GP4535	A76	3954929	...GT305097 GP6520	A42
1291354	...T11008	B36	1520639	...HSK63ACHRC2140M	B13	3170946	...12228 GP4535	A76	3954930	...GT305098 GP6520	A42
1291355	...T11009	B36	1520641	...HSK63ACHRC3203M	B13	3170947	...12229 GP4535	A76	3954931	...GT305099 GP6520	A42
1291356	...T11010	B36	1520643	...HSK100ACHRC1112M	B14	3170948	...12230 GP4535	A76	3954932	...GT305100 GP6520	A42
1291357	...T11013	B36	1520644	...HSK100ACHRC2144M	B14	3494690	...12781 GP4535	A77	3955023	...GT305101 GP6520	A42
1291358	...T11014	B36	1520645	...HSK100ACHRC3210M	B14	3494691	...12782 GP4535	A77	3955024	...GT305102 GP6520	A42
1291359	...T11015	B36	1551134	...20ERTC045034M	B29	3494692	...12783 GP4535	A77	3955025	...GT305103 GP6520	A42
1291360	...T110155	B36	1551135	...20ERTC055043M	B29	3494693	...12784 GP4535	A77	3955026	...GT305104 GP6520	A42
1291361	...T110166	B36	1581657	...40ERTC220180M	B29	3494694	...12785 GP4535	A77	3955027	...GT305105 GP6520	A42
1291362	...T110177	B36	1606078	...150TGST075	B28	3494695	...12786 GP4535	A77	3955028	...GT305106 GP6520	A42
1291408	...T2SET	B37	1606102	...150TGST037P	B28	3494696	...12787 GP4535	A77	3955029	...GT305107 GP6520	A42
1291412	...T21018	B36	1606103	...150TGST050P	B28	3494697	...12788 GP4535	A77	3955030	...GT305108 GP6520	A42
1291413	...T21019	B36	1615978	...CV40TCRC1297	B17	3494698	...12789 GP4535	A77	3955031	...GT305109 GP6520	A42
1291414	...T21020	B36	1615979	...CV40TCRC2393	B17	3494712	...12731 GP4535	A78	3955032	...GT305110 GP6520	A42
1291415	...T21021	B36	1615981	...CV50TCRC1297	B18	3494713	...12732 GP4535	A78	3955033	...GT305111 GP6520	A42
1291416	...T21022	B36	1615982	...CV50TCRC2393	B18	3494714	...12733 GP4535	A78	3955034	...GT305112 GP6520	A42
1291417	...T21023	B36	1615983	...CV50TCRC3516	B18	3494715	...12734 GP4535	A78	3955035	...GT305113 GP6520	A42
1291419	...T21024	B36	1615986	...CV40HTCRC1382	B17	3494716	...12735 GP4535	A78	3955036	...GT305114 GP6520	A42
1291420	...T21025	B36	1615987	...CV40HTCRC2524	B17	3494717	...12736 GP4535	A78	3955037	...GT305115 GP6520	A42
1291421	...T21026	B36	1746797	...20ERTC080062M	B29	3494718	...12737 GP4535	A78	3955038	...GT215001 GM6515	A39

Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)
3955039	...GT215002 GM6515	A39	3955098	...GT305148 GM6515	A42	3955373	...GT315011 GP6520	A43	4033767	...GT205124 GP6520	A52
3955040	...GT215003 GM6515	A39	3955099	...GT305079 GM6515	A42	3955374	...GT315012 GP6520	A43	4033768	...GT205125 GP6520	A52
3955041	...GT215004 GM6515	A39	3955100	...GT305080 GM6515	A42	3964071	...KM40TSST1045M	B10	4033770	...GT205127 GP6520	A52
3955042	...GT215005 GM6515	A39	3955101	...GT305081 GM6515	A42	3964072	...KM40TSST2070M	B10	4033772	...GT205129 GP6520	A52
3955047	...GT205077 GM6515	A38	3955102	...GT305082 GM6515	A42	3964133	...KM50TSST1050M	B11	4033776	...GT305151 GP6520	A53
3955048	...GT205078 GM6515	A38	3955103	...GT305083 GM6515	A42	3964134	...KM50TSST2075M	B11	4033778	...GT305153 GP6520	A53
3955049	...GT205079 GM6515	A38	3955104	...GT305084 GM6515	A42	4033659	...GT415001 GP6520	A47	4033779	...GT305154 GP6520	A53
3955050	...GT205080 GM6515	A38	3955105	...GT305085 GM6515	A42	4033660	...GT415002 GP6520	A47	4033781	...GT305156 GP6520	A53
3955051	...GT205081 GM6515	A38	3955106	...GT305086 GM6515	A42	4033661	...GT415003 GP6520	A47	4033783	...GT305158 GP6520	A53
3955052	...GT205082 GM6515	A38	3955107	...GT305087 GM6515	A42	4033662	...GT415004 GP6520	A47	4033787	...GT315014 GP6520	A54
3955053	...GT215006 GM6515	A39	3955108	...GT305088 GM6515	A42	4033699	...GT405001 GP6520	A46	4033789	...GT315016 GP6520	A54
3955054	...GT215007 GP6520	A39	3955109	...GT305089 GM6515	A42	4033700	...GT405002 GP6520	A46	4033790	...GT315017 GP6520	A54
3955055	...GT215008 GP6520	A39	3955110	...GT305090 GM6515	A42	4033701	...GT405003 GP6520	A46	4033792	...GT315019 GP6520	A54
3955056	...GT215009 GP6520	A39	3955111	...GT305091 GM6515	A42	4033702	...GT405004 GP6520	A46	4033794	...GT315021 GP6520	A54
3955057	...GT215010 GP6520	A39	3955112	...GT305092 GM6515	A42	4033723	...GT205111 GP6520	A38, A52	4033813	...GT415005 GP6520	A47
3955058	...GT215011 GP6520	A39	3955113	...GT305093 GM6515	A42	4033725	...GT205113 GP6520	A38, A52	4033814	...GT415006 GP6520	A47
3955059	...GT215012 GP6520	A39	3955114	...GT305094 GM6515	A42	4033726	...GT205114 GP6520	A38, A52	4033815	...GT415007 GP6520	A47
3955073	...GT205083 GM6515	A38	3955115	...GT305095 GM6515	A42	4033728	...GT205116 GP6520	A38, A52	4033816	...GT415008 GP6520	A47
3955074	...GT205084 GM6515	A38	3955116	...GT305096 GM6515	A42	4033730	...GT205118 GP6520	A38, A52	4033817	...GT415009 GP6520	A47
3955075	...GT205085 GM6515	A38	3955123	...GT205103 GP6520	A38	4033733	...GT305161 GP6520	A42, A53	4033818	...GT415010 GP6520	A47
3955076	...GT205086 GM6515	A38	3955124	...GT205104 GP6520	A38	4033735	...GT305163 GP6520	A42, A53	4035066	...GT305116 GP6505	A42
3955077	...GT205087 GM6515	A38	3955125	...GT205105 GP6520	A38	4033736	...GT305164 GP6520	A42, A53	4035067	...GT305117 GP6505	A42
3955078	...GT205088 GM6515	A38	3955126	...GT205106 GP6520	A38	4033738	...GT305166 GP6520	A42, A53	4035068	...GT305118 GP6505	A42
3955079	...GT205089 GM6515	A38	3955127	...GT205107 GP6520	A38	4033740	...GT305168 GP6520	A42, A53	4035069	...GT305119 GP6505	A42
3955080	...GT205090 GM6515	A38	3955128	...GT205108 GP6520	A38	4033744	...GT315025 GP6520	A43, A54	4035070	...GT305120 GP6505	A42
3955081	...GT205091 GM6515	A38	3955129	...GT205109 GP6520	A38	4033746	...GT315027 GP6520	A43, A54	4035071	...GT305121 GP6505	A42
3955082	...GT205092 GM6515	A38	3955130	...GT205110 GP6520	A38	4033747	...GT315028 GP6520	A43, A54	4035072	...GT305122 GP6505	A42
3955083	...GT205093 GM6515	A38	3955343	...GT315001 GM6515	A43	4033749	...GT315030 GP6520	A43, A54	4035073	...GT305123 GP6505	A42
3955084	...GT205094 GP6520	A38	3955344	...GT315002 GM6515	A43	4033751	...GT315032 GP6520	A43, A54	4035074	...GT305124 GP6505	A42
3955085	...GT205095 GP6520	A38	3955345	...GT315003 GM6515	A43	4033753	...GT405005 GP6520	A46	4138391	...GTM115001 WU13PV	A96
3955086	...GT205096 GP6520	A38	3955346	...GT315004 GM6515	A43	4033754	...GT405006 GP6520	A46	4138392	...GTM115002 WU13PV	A96
3955087	...GT205097 GP6520	A38	3955347	...GT315005 GM6515	A43	4033755	...GT405007 GP6520	A46	4138493	...GTM115003 WU13PV	A96
3955088	...GT205098 GP6520	A38	3955348	...GT315006 GM6515	A43	4033756	...GT405008 GP6520	A46	4138494	...GTM115004 WU13PV	A96
3955089	...GT205099 GP6520	A38	3955349	...GT315007 GP6520	A43	4033757	...GT405009 GP6520	A46	4138495	...GTM115005 WU13PV	A96
3955090	...GT205100 GP6520	A38	3955350	...GT315008 GP6520	A43	4033758	...GT405010 GP6520	A46	4138496	...GTM115006 WU13PV	A96
3955091	...GT205101 GP6520	A38	3955351	...GT315009 GP6520	A43	4033759	...GT405011 GP6520	A46	4138497	...GTM115007 WU13PV	A96
3955092	...GT205102 GP6520	A38	3955352	...GT315010 GP6520	A43	4033765	...GT205122 GP6520	A52	4138498	...GTM115008 WU13PV	A96



Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)
4138499	GTM115009 WU13PV	A96	4138536	GTM215023 WU12PV	A97	4138573	GTM315027 WU12PV	A99	4138610	GTM415025 WU16PV	A101
4138500	GTM115010 WU13PV	A96	4138537	GTM215024 WU12PV	A97	4138574	GTM315029 WU12PV	A99	4138611	GTM415026 WU16PV	A101
4138501	GTM115011 WU13PV	A96	4138538	GTM215025 WU12PV	A97	4138575	GTM415041 WU16PV	A103	4138612	GTM415027 WU16PV	A101
4138502	GTM115012 WU13PV	A96	4138539	GTM215026 WU12PV	A97	4138576	GTM415001 WU16PV	A102	4138613	GTM415028 WU16PV	A101
4138503	GTM115013 WU13PV	A96	4138540	GTM215027 WU12PV	A97	4138577	GTM415042 WU16PV	A103	4138614	GTM415030 WU16PV	A101
4138504	GTM115014 WU13PV	A96	4138541	GTM215028 WU12PV	A97	4138578	GTM415002 WU16PV	A102	4138615	GTM415037 WU16PV	A101
4138505	GTM115015 WU13PV	A96	4138542	GTM215029 WU12PV	A97	4138579	GTM415043 WU16PV	A103	4138616	GTM415039 WU16PV	A101
4138506	GTM115016 WU13PV	A96	4138543	GTM215030 WU12PV	A97	4138580	GTM415003 WU16PV	A102	4138617	GTM415033 WU16PV	A101
4138507	GTM115017 WU13PV	A96	4138544	GTM215031 WU12PV	A97	4138581	GTM415044 WU16PV	A103	4138618	GTM415034 WU16PV	A101
4138508	GTM115018 WU13PV	A96	4138545	GTM315001 WU12PV	A100	4138582	GTM415004 WU16PV	A102	4138619	GTM415035 WU16PV	A101
4138509	GTM115019 WU13PV	A96	4138546	GTM315002 WU12PV	A100	4138583	GTM415045 WU16PV	A103	4138620	GTM415036 WU16PV	A101
4138510	GTM115020 WU13PV	A96	4138547	GTM315003 WU12PV	A100	4138584	GTM415005 WU16PV	A102	4138621	GTM415038 WU16PV	A101
4138511	GTM115021 WU13PV	A96	4138548	GTM315004 WU12PV	A100	4138585	GTM415046 WU16PV	A103	4152638	GT025001 WP31MG	A31
4138512	GTM115022 WU13PV	A96	4138549	GTM315005 WU12PV	A100	4138586	GTM415006 WU16PV	A102	4152639	GT025002 WP31MG	A31
4138513	GTM115023 WU13PV	A96	4138550	GTM315006 WU12PV	A100	4138587	GTM415008 WU16PV	A102	4152640	GT025003 WP31MG	A31
4138514	GTM215001 WU12PV	A98	4138551	GTM315007 WU12PV	A100	4138588	GTM415009 WU16PV	A102	4152641	GT025004 WP31MG	A31
4138515	GTM215002 WU12PV	A98	4138552	GTM315008 WU12PV	A100	4138589	GTM415010 WU16PV	A102	4152642	GT025005 WP31MG	A31
4138516	GTM215003 WU12PV	A98	4138553	GTM315009 WU12PV	A100	4138590	GTM415011 WU16PV	A102	4152703	GT025006 WP31MG	A31
4138517	GTM215004 WU12PV	A98	4138554	GTM315010 WU12PV	A100	4138591	GTM415012 WU16PV	A102	4152704	GT025007 WP31MG	A31
4138518	GTM215005 WU12PV	A98	4138555	GTM315011 WU12PV	A100	4138592	GTM415014 WU16PV	A102	4152705	GT025008 WP31MG	A31
4138519	GTM215006 WU12PV	A98	4138556	GTM315012 WU12PV	A100	4138593	GTM415015 WU16PV	A102	4152706	GT025009 WP31MG	A31
4138520	GTM215007 WU12PV	A98	4138557	GTM315013 WU12PV	A100	4138594	GTM415016 WU16PV	A102	4152707	GT025010 WP31MG	A31
4138521	GTM215008 WU12PV	A98	4138558	GTM315014 WU12PV	A100	4138595	GTM415013 WU16PV	A102	4152708	GT025011 WP31MG	A31
4138522	GTM215009 WU12PV	A98	4138559	GTM315015 WU12PV	A100	4138596	GTM415017 WU16PV	A102	4152709	GT025012 WP31MG	A31
4138523	GTM215010 WU12PV	A98	4138560	GTM315016 WU12PV	A100	4138597	GTM415047 WU16PV	A103	4152710	GT025013 WP31MG	A31
4138524	GTM215011 WU12PV	A98	4138561	GTM315021 WU12PV	A99	4138598	GTM415007 WU16PV	A102	4152711	GT025014 WP31MG	A31
4138525	GTM215012 WU12PV	A98	4138562	GTM315023 WU12PV	A99	4138599	GTM415018 WU16PV	A102	4152712	GT025015 WP31MG	A31
4138526	GTM215013 WU12PV	A98	4138563	GTM315017 WU12PV	A99	4138600	GTM415019 WU16PV	A102	4152713	GT025016 WP31MG	A31
4138527	GTM215014 WU12PV	A98	4138564	GTM315018 WU12PV	A99	4138601	GTM415020 WU16PV	A102	4152714	GT025017 WP31MG	A31
4138528	GTM215015 WU12PV	A98	4138565	GTM315019 WU12PV	A99	4138602	GTM415021 WU16PV	A102	4152715	GT025018 WP31MG	A31
4138529	GTM215016 WU12PV	A98	4138566	GTM315020 WU12PV	A99	4138603	GTM415022 WU16PV	A102	4153679	GT005001 WP31MG	A30
4138530	GTM215017 WU12PV	A97	4138567	GTM315022 WU12PV	A99	4138604	GTM415023 WU16PV	A102	4153680	GT005002 WP31MG	A30
4138531	GTM215018 WU12PV	A97	4138568	GTM315028 WU12PV	A99	4138605	GTM415024 WU16PV	A102	4153681	GT005003 WP31MG	A30
4138532	GTM215019 WU12PV	A97	4138569	GTM315030 WU12PV	A99	4138606	GTM415029 WU16PV	A101	4153682	GT005004 WP31MG	A30
4138533	GTM215020 WU12PV	A97	4138570	GTM315024 WU12PV	A99	4138607	GTM415031 WU16PV	A101	4153753	GT005005 WP31MG	A30
4138534	GTM215021 WU12PV	A97	4138571	GTM315025 WU12PV	A99	4138608	GTM415032 WU16PV	A101	4153754	GT005006 WP31MG	A30
4138535	GTM215022 WU12PV	A97	4138572	GTM315026 WU12PV	A99	4138609	GTM415040 WU16PV	A101	4153755	GT005007 WP31MG	A30

Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)
4153756	...GT005008 WP31MG	A30	4154262	...GT505009 GP6520	A55	4154678	...GT225008 WN38MG	A40	4158519	...GT225030 WP31MG	A40
4153757	...GT005009 WP31MG	A30	4154263	...GT505010 GP6520	A55	4154679	...GT225009 WN38MG	A40	4158763	...GT045003 WH36MG	A32
4153758	...GT005010 WP31MG	A30	4154264	...GT515001 GP6520	A56	4154680	...GT225010 WN38MG	A40	4158764	...GT045004 WH36MG	A32
4153759	...GT005011 WP31MG	A30	4154265	...GT515002 GP6520	A56	4154681	...GT225011 WN38MG	A40	4158765	...GT045005 WH36MG	A32
4153760	...GT005012 WP31MG	A30	4154266	...GT515003 GP6520	A56	4154682	...GT225012 WN38MG	A40	4158766	...GT045006 WH36MG	A32
4153761	...GT005013 WP31MG	A30	4154267	...GT515004 GP6520	A56	4154683	...GT225013 WN38MG	A40	4158767	...GT045007 WH36MG	A32
4153762	...GT005014 WP31MG	A30	4154268	...GT515005 GP6520	A56	4154684	...GT225014 WN38MG	A40	4158768	...GT045008 WH36MG	A32
4153763	...GT005015 WP31MG	A30	4154269	...GT515006 GP6520	A56	4154685	...GT225015 WN38MG	A40	4158769	...GT045009 WH36MG	A32
4153764	...GT005016 WP31MG	A30	4154270	...GT515007 GP6520	A56	4158323	...GX105001 WH16PG	A81	4158770	...GT045010 WH36MG	A32
4153765	...GT005017 WP31MG	A30	4154271	...GT515008 GP6520	A56	4158324	...GX105002 WH16PG	A81	4158771	...GT045011 WH36MG	A32
4153766	...GT005018 WP31MG	A30	4154272	...GT515009 GP6520	A56	4158325	...GX105003 WH16PG	A81	4158772	...GT045012 WH36MG	A32
4153906	...GT325001 GP6520	A44	4154273	...GT515010 GP6520	A56	4158326	...GX105004 WH16PG	A81	4158773	...GT045013 WH36MG	A32
4153907	...GT325002 GP6520	A44	4154274	...GT425001 GP6520	A48	4158327	...GX105005 WH16PG	A81	4158774	...GT045014 WH36MG	A32
4153908	...GT325003 GP6520	A44	4154275	...GT425002 GP6520	A48	4158328	...GX105006 WH16PG	A81	4158775	...GT045015 WH36MG	A32
4153909	...GT325004 GP6520	A44	4154276	...GT425003 GP6520	A48	4158329	...GX105007 WH16PG	A81	4158776	...GT045016 WH36MG	A32
4153910	...GT325005 GP6520	A44	4154277	...GT425004 GP6520	A48	4158330	...GX105008 WH16PG	A81	4158777	...GT045017 WH36MG	A32
4153911	...GT325006 GP6520	A44	4154278	...GT425005 GP6520	A48	4158331	...GX105009 WH16PG	A81	4158778	...GT045018 WH36MG	A32
4153912	...GT325007 GP6520	A44	4154279	...GT425006 GP6520	A48	4158332	...GX105010 WH16PG	A81	4159522	...GT235001 WN38MG	A41
4153953	...GT325008 GP6520	A44	4154280	...GT425007 GP6520	A48	4158333	...GX105011 WH16PG	A81	4159636	...GT125001 WS32MG	A35
4153954	...GT325009 GP6520	A44	4154281	...GT425008 GP6520	A48	4158334	...GX105012 WH16PG	A81	4159637	...GT125002 WS32MG	A35
4153955	...GT335001 GP6520	A45	4154282	...GT425009 GP6520	A48	4158335	...GX105013 WH16PG	A81	4159638	...GT125003 WS32MG	A35
4153956	...GT335002 GP6520	A45	4154283	...GT435001 GP6520	A49	4158471	...GT045001 WH36MG	A32	4159639	...GT125004 WS32MG	A35
4153957	...GT335003 GP6520	A45	4154284	...GT435002 GP6520	A49	4158472	...GT045002 WH36MG	A32	4159640	...GT125005 WS32MG	A35
4153958	...GT335004 GP6520	A45	4154285	...GT435003 GP6520	A49	4158495	...GT225016 WP31MG	A40	4159641	...GT125006 WS32MG	A35
4153959	...GT335005 GP6520	A45	4154286	...GT435004 GP6520	A49	4158496	...GT225017 WP31MG	A40	4159642	...GT125007 WS32MG	A35
4153960	...GT335006 GP6520	A45	4154287	...GT435005 GP6520	A49	4158497	...GT225018 WP31MG	A40	4159644	...GT235002 WN38MG	A41
4153961	...GT335007 GP6520	A45	4154288	...GT435006 GP6520	A49	4158498	...GT225019 WP31MG	A40	4159645	...GT235003 WN38MG	A41
4153962	...GT335008 GP6520	A45	4154289	...GT435007 GP6520	A49	4158499	...GT225020 WP31MG	A40	4159646	...GT235004 WN38MG	A41
4153963	...GT335009 GP6520	A45	4154290	...GT435008 GP6520	A49	4158500	...GT225021 WP31MG	A40	4159647	...GT235005 WN38MG	A41
4154254	...GT505001 GP6520	A55	4154291	...GT435009 GP6520	A49	4158501	...GT225022 WP31MG	A40	4159648	...GT235006 WN38MG	A41
4154255	...GT505002 GP6520	A55	4154671	...GT225001 WN38MG	A40	4158502	...GT225023 WP31MG	A40	4159649	...GT235007 WN38MG	A41
4154256	...GT505003 GP6520	A55	4154672	...GT225002 WN38MG	A40	4158513	...GT225024 WP31MG	A40	4159650	...GT235008 WN38MG	A41
4154257	...GT505004 GP6520	A55	4154673	...GT225003 WN38MG	A40	4158514	...GT225025 WP31MG	A40	4159651	...GT235009 WN38MG	A41
4154258	...GT505005 GP6520	A55	4154674	...GT225004 WN38MG	A40	4158515	...GT225026 WP31MG	A40	4159652	...GT235010 WN38MG	A41
4154259	...GT505006 GP6520	A55	4154675	...GT225005 WN38MG	A40	4158516	...GT225027 WP31MG	A40	4159653	...GT235011 WN38MG	A41
4154260	...GT505007 GP6520	A55	4154676	...GT225006 WN38MG	A40	4158517	...GT225028 WP31MG	A40	4159663	...GT125008 WS32MG	A35
4154261	...GT505008 GP6520	A55	4154677	...GT225007 WN38MG	A40	4158518	...GT225029 WP31MG	A40	4159664	...GT125009 WS32MG	A35

Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)
4159665	GT125010 WS32MG	A35	4160062	GT805009 WN48EG	A51	5366664	VTSP06508 WU40EG	A15	5366707	VTSP06523 WP49EG	A16
4159913	GT065001 WS32MG	A33	4160063	GT705008 WN48EG	A50	5366665	VTSP06509 WP49EG	A15	5366708	VTSP06523 WU40EG	A16
4159914	GT065002 WS32MG	A33	4160093	GT145001 WN35MG	A36	5366666	VTSP06510 WU41EG	A15	5366709	VTSP06524 WP49EG	A16
4159915	GT065003 WS32MG	A33	4160094	GT145002 WN35MG	A36	5366667	VTSP06510 WP42EG	A15	5368514	VTSP06525 WU41EG	A15
4159916	GT065004 WS32MG	A33	4160095	GT145003 WN35MG	A36	5366668	VTSP06510 WP49EG	A15	5368515	VTSP06525 WP49EG	A15
4159917	GT065005 WS32MG	A33	4160096	GT145004 WN35MG	A36	5366669	VTSP06510 WU40EG	A15	5368516	VTSP06525 WU40EG	A15
4159918	GT065006 WS32MG	A33	4160097	GT145005 WN35MG	A36	5366670	VTSP06511 WP49EG	A15	5368517	VTSP06526 WU41EG	A15
4159919	GT065007 WS32MG	A33	4160098	GT145006 WN35MG	A36	5366671	VTSP06512 WU41EG	A15	5368518	VTSP06526 WP49EG	A15
4159920	GT065008 WS32MG	A33	4160099	GT145007 WN35MG	A36	5366673	VTSP06512 WP49EG	A15	5368519	VTSP06526 WU40EG	A15
4159921	GT065009 WS32MG	A33	4160100	GT105001 WS32MG	A34	5366674	VTSP06512 WU40EG	A15	5368540	VTSP06527 WU41EG	A15
4159922	GT065010 WS32MG	A33	4160101	GT105002 WS32MG	A34	5366675	VTSP06513 WU41EG	A15	5368541	VTSP06527 WP49EG	A15
4159965	GT235012 WP31MG	A41	4160102	GT105003 WS32MG	A34	5366676	VTSP06513 WP42EG	A15	5368542	VTSP06527 WU40EG	A15
4159966	GT235013 WP31MG	A41	4160103	GT105004 WS32MG	A34	5366677	VTSP06513 WP49EG	A15	5368543	VTSP06528 WU41EG	A15
4159967	GT235014 WP31MG	A41	4160104	GT105005 WS32MG	A34	5366678	VTSP06513 WU40EG	A15	5368544	VTSP06528 WP49EG	A15
4159968	GT235015 WP31MG	A41	4160105	GT105006 WS32MG	A34	5366679	VTSP06514 WP49EG	A15	5368545	VTSP06528 WU40EG	A15
4159969	GT235016 WP31MG	A41	4160106	GT105007 WS32MG	A34	5366680	VTSP06515 WU41EG	A15	5368546	VTSP06529 WU41EG	A15
4159970	GT235017 WP31MG	A41	4160107	GT105008 WS32MG	A34	5366681	VTSP06515 WP42EG	A15	5368547	VTSP06529 WP49EG	A15
4159971	GT235018 WP31MG	A41	4160108	GT105009 WS32MG	A34	5366682	VTSP06515 WP49EG	A15	5368548	VTSP06529 WU40EG	A15
4159972	GT235019 WP31MG	A41	4160109	GT105010 WS32MG	A34	5366684	VTSP06515 WU40EG	A15	5368549	VTSP06530 WU41EG	A16
4159993	GT235020 WP31MG	A41	4160437	GT165001 WN35MG	A37	5366685	VTSP06516 WP49EG	A15	5368550	VTSP06530 WP49EG	A16
4159994	GT235021 WP31MG	A41	4160438	GT165002 WN35MG	A37	5366686	VTSP06517 WU41EG	A15	5368551	VTSP06530 WU40EG	A16
4159995	GT235022 WP31MG	A41	4160439	GT165003 WN35MG	A37	5366687	VTSP06517 WP42EG	A15	5368552	VTSP06531 WU41EG	A16
4160036	GT705001 WN48EG	A50	4160440	GT165004 WN35MG	A37	5366688	VTSP06517 WP49EG	A15	5368553	VTSP06531 WP42EG	A16
4160037	GT705002 WN48EG	A50	4160441	GT165005 WN35MG	A37	5366689	VTSP06517 WU40EG	A15	5368554	VTSP06531 WP49EG	A16
4160038	GT705003 WN48EG	A50	4160442	GT165006 WN35MG	A37	5366690	VTSP06518 WP49EG	A15	5368555	VTSP06531 WU40EG	A16
4160039	GT705004 WN48EG	A50	4160523	GT165007 WN35MG	A37	5366692	VTSP06519 WU41EG	A15	5368556	VTSP06532 WP49EG	A16
4160040	GT705005 WN48EG	A50	5143530	GT315033 GP6520	A43	5366693	VTSP06519 WP42EG	A15	5368557	VTSP06533 WU41EG	A16
4160041	GT705006 WN48EG	A50	5143531	GT315034 GP6520	A43	5366695	VTSP06519 WP49EG	A15	5368558	VTSP06533 WP42EG	A16
4160042	GT705007 WN48EG	A50	5143532	GT315035 GP6520	A43	5366696	VTSP06519 WU40EG	A15	5368559	VTSP06533 WP49EG	A16
4160054	GT805001 WN48EG	A51	5366646	VTSP06505 WU41EG	A15	5366697	VTSP06520 WP49EG	A15	5368560	VTSP06533 WU40EG	A16
4160055	GT805002 WN48EG	A51	5366647	VTSP06505 WP42EG	A15	5366698	VTSP06521 WU41EG	A15	5368561	VTSP06534 WP49EG	A16
4160056	GT805003 WN48EG	A51	5366648	VTSP06505 WP49EG	A15	5366700	VTSP06521 WP42EG	A15	5368562	VTSP06535 WU41EG	A16
4160057	GT805004 WN48EG	A51	5366649	VTSP06505 WU40EG	A15	5366701	VTSP06521 WP49EG	A15	5368563	VTSP06535 WP42EG	A16
4160058	GT805005 WN48EG	A51	5366660	VTSP06506 WP49EG	A15	5366703	VTSP06521 WU40EG	A15	5368565	VTSP06535 WP49EG	A16
4160059	GT805006 WN48EG	A51	5366661	VTSP06507 WP49EG	A15	5366704	VTSP06522 WP49EG	A15	5368566	VTSP06535 WU40EG	A16
4160060	GT805007 WN48EG	A51	5366662	VTSP06508 WU41EG	A15	5366705	VTSP06523 WU41EG	A16	5368567	VTSP06536 WP49EG	A16
4160061	GT805008 WN48EG	A51	5366663	VTSP06508 WP49EG	A15	5366706	VTSP06523 WP42EG	A16	5368568	VTSP06537 WU41EG	A16

Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)
5368569	VTSP06537 WP42EG	A16	5368616	VTSP06552 WP49EG	A15	5368692	VTSP06570 WU40EG	A16	5368741	VTSFT6518 WP42EG	A22
5368570	VTSP06537 WP49EG	A16	5368617	VTSP06552 WU40EG	A15	5368693	VTSP06571 WP49EG	A16	5368742	VTSFT6518 WP49EG	A22
5368571	VTSP06537 WU40EG	A16	5368618	VTSP06553 WP49EG	A15	5368694	VTSP06571 WU40EG	A16	5368743	VTSFT6518 WU40EG	A22
5368572	VTSP06538 WU41EG	A16	5368619	VTSP06553 WU40EG	A15	5368695	VTSP06572 WU40EG	A16	5368744	VTSFT6519 WP49EG	A22
5368573	VTSP06538 WP42EG	A16	5368620	VTSP06554 WP49EG	A16	5368696	VTSP06573 WP49EG	A16	5368745	VTSFT6520 WP49EG	A22
5368574	VTSP06538 WP49EG	A16	5368621	VTSP06554 WU40EG	A16	5368697	VTSP06573 WU40EG	A16	5368746	VTSFT6520 WU40EG	A22
5368575	VTSP06538 WU40EG	A16	5368622	VTSP06555 WP49EG	A16	5368698	VTSP06574 WU40EG	A16	5368748	VTSFT6521 WU41EG	A22
5368576	VTSP06539 WU41EG	A16	5368623	VTSP06555 WU40EG	A16	5368699	VTSP06575 WU40EG	A16	5368749	VTSFT6521 WP42EG	A22
5368577	VTSP06539 WP42EG	A16	5368624	VTSP06556 WP49EG	A16	5368702	VTSFT6506 WU41EG	A22	5368750	VTSFT6521 WP49EG	A22
5368578	VTSP06539 WP49EG	A16	5368625	VTSP06556 WU40EG	A16	5368703	VTSFT6506 WP42EG	A22	5368751	VTSFT6521 WU40EG	A22
5368579	VTSP06539 WU40EG	A16	5368626	VTSP06557 WP49EG	A16	5368704	VTSFT6506 WP49EG	A22	5368752	VTSFT6522 WP49EG	A22
5368580	VTSP06540 WU41EG	A16	5368627	VTSP06557 WU40EG	A16	5368705	VTSFT6506 WU40EG	A22	5368753	VTSFT6523 WU41EG	A23
5368581	VTSP06540 WP42EG	A16	5368628	VTSP06558 WP49EG	A16	5368706	VTSFT6507 WP49EG	A22	5368754	VTSFT6523 WP42EG	A23
5368582	VTSP06540 WP49EG	A16	5368629	VTSP06558 WU40EG	A16	5368707	VTSFT6508 WP49EG	A22	5368755	VTSFT6523 WP49EG	A23
5368583	VTSP06540 WU40EG	A16	5368630	VTSP06559 WP49EG	A16	5368708	VTSFT6509 WU41EG	A22	5368756	VTSFT6523 WU40EG	A23
5368584	VTSP06541 WU41EG	A16	5368631	VTSP06559 WU40EG	A16	5368709	VTSFT6509 WP49EG	A22	5368757	VTSFT6524 WP49EG	A23
5368585	VTSP06541 WP49EG	A16	5368632	VTSP06560 WP49EG	A16	5368720	VTSFT6509 WU40EG	A22	5387434	VTSFT6574 WP42EG	A24
5368586	VTSP06541 WU40EG	A16	5368633	VTSP06560 WU40EG	A16	5368721	VTSFT6510 WP49EG	A22	5387435	VTSFT6574 WP49EG	A24
5368587	VTSP06542 WU41EG	A16	5368634	VTSP06561 WP49EG	A16	5368722	VTSFT6511 WU41EG	A22	5387436	VTSFT6575 WP42EG	A24
5368588	VTSP06542 WP49EG	A16	5368635	VTSP06561 WU40EG	A16	5368723	VTSFT6511 WP42EG	A22	5387437	VTSFT6575 WP49EG	A24
5368589	VTSP06542 WU40EG	A16	5368636	VTSP06562 WP49EG	A16	5368724	VTSFT6511 WP49EG	A22	5387438	VTSFT6576 WP42EG	A24
5368600	VTSP06543 WP49EG	A16	5368637	VTSP06562 WU40EG	A16	5368725	VTSFT6511 WU40EG	A22	5387439	VTSFT6576 WP49EG	A24
5368601	VTSP06544 WP49EG	A16	5368638	VTSP06563 WP49EG	A16	5368726	VTSFT6512 WP49EG	A22	5387460	VTSFT6577 WP42EG	A24
5368602	VTSP06545 WP49EG	A15	5368639	VTSP06563 WU40EG	A16	5368727	VTSFT6513 WU41EG	A22	5387461	VTSFT6577 WP49EG	A24
5368603	VTSP06545 WU40EG	A15	5368640	VTSP06564 WP49EG	A16	5368728	VTSFT6513 WP49EG	A22	5387462	VTSFT6578 WP42EG	A24
5368604	VTSP06546 WP49EG	A15	5368641	VTSP06564 WU40EG	A16	5368729	VTSFT6513 WU40EG	A22	5387463	VTSFT6578 WP49EG	A24
5368605	VTSP06546 WU40EG	A15	5368642	VTSP06565 WP49EG	A16	5368730	VTSFT6514 WU41EG	A22	5387464	VTSFT6579 WP42EG	A24
5368606	VTSP06547 WP49EG	A15	5368643	VTSP06565 WU40EG	A16	5368731	VTSFT6514 WP42EG	A22	5387465	VTSFT6579 WP49EG	A24
5368607	VTSP06547 WU40EG	A15	5368683	VTSP06566 WP49EG	A16	5368732	VTSFT6514 WP49EG	A22	5387466	VTSFT6580 WP42EG	A24
5368608	VTSP06548 WP49EG	A15	5368684	VTSP06566 WU40EG	A16	5368733	VTSFT6514 WU40EG	A22	5387467	VTSFT6580 WP49EG	A24
5368609	VTSP06548 WU40EG	A15	5368685	VTSP06567 WP49EG	A16	5368734	VTSFT6515 WP49EG	A22	5387468	VTSFT6581 WP42EG	A24
5368610	VTSP06549 WP49EG	A15	5368686	VTSP06567 WU40EG	A16	5368735	VTSFT6516 WU41EG	A22	5387469	VTSFT6581 WP49EG	A24
5368611	VTSP06549 WU40EG	A15	5368687	VTSP06568 WP49EG	A16	5368736	VTSFT6516 WP42EG	A22	5387470	VTSFT6582 WP49EG	A24
5368612	VTSP06550 WP49EG	A15	5368688	VTSP06568 WU40EG	A16	5368737	VTSFT6516 WP49EG	A22	5387471	VTSFT6583 WP42EG	A24
5368613	VTSP06550 WU40EG	A15	5368689	VTSP06569 WP49EG	A16	5368738	VTSFT6516 WU40EG	A22	5387472	VTSFT6583 WP49EG	A24
5368614	VTSP06551 WP49EG	A15	5368690	VTSP06569 WU40EG	A16	5368739	VTSFT6517 WP49EG	A22	5387473	VTSFT6584 WP42EG	A24
5368615	VTSP06551 WU40EG	A15	5368691	VTSP06570 WP49EG	A16	5368740	VTSFT6518 WU41EG	A22	5387474	VTSFT6584 WP49EG	A24

Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)
5387475	VTSFT6585 WP42EG	A24	5387676	VTSFT6034 WP49EG	A19–A20	5387786	VTSP06035 WP49EG	A13	5398798	VTSFT7510 WU40EG	A25
5387476	VTSFT6585 WP49EG	A24	5387677	VTSFT6035 WP49EG	A19–A20	5387787	VTSP06036 WP49EG	A13	5398799	VTSFT7510 WU41EG	A25
5387477	VTSFT6586 WP42EG	A24	5387678	VTSFT6036 WP49EG	A19–A20	5387788	VTSP06037 WP49EG	A13	5398800	VTSFT7511 WU40EG	A25
5387478	VTSFT6586 WP49EG	A24	5387679	VTSFT6037 WP49EG	A19–A20	5387789	VTSP06038 WP49EG	A13	5398801	VTSFT7512 WU40EG	A25
5387479	VTSFT6587 WP42EG	A24	5387700	VTSFT6038 WP49EG	A19–A20	5387790	VTSP06039 WP49EG	A13	5398802	VTSFT7513 WU40EG	A25
5387481	VTSFT6587 WP49EG	A24	5387701	VTSFT6039 WP49EG	A19–A20	5387791	VTSP06040 WP49EG	A13	5398803	VTSFT7514 WU40EG	A25
5387482	VTSFT6588 WP42EG	A24	5387702	VTSFT6040 WP49EG	A19–A20	5387859	VTSP07505 WU40EG	A17	5398804	VTSFT7515 WU40EG	A25
5387483	VTSFT6588 WP49EG	A24	5387704	VTSP06005 WP49EG	A13	5387861	VTSP07505 WU41EG	A17	5398805	VTSFT7516 WU40EG	A25
5387487	VTSFT6005 WP49EG	A19–A20	5387705	VTSP06006 WP49EG	A14	5387863	VTSP07506 WU40EG	A17	5398806	VTSFT7517 WU40EG	A25
5387488	VTSFT6006 WP49EG	A21	5387707	VTSP06007 WP49EG	A13	5387865	VTSP07506 WU41EG	A17	5398807	VTSFT7518 WU40EG	A25
5387489	VTSFT6007 WP49EG	A19–A20	5387708	VTSP06008 WP49EG	A13	5387867	VTSP07507 WU40EG	A17	5398808	VTSFT7519 WU40EG	A25
5387640	VTSFT6008 WP49EG	A19–A20	5387709	VTSP06009 WP49EG	A14	5387869	VTSP07507 WU41EG	A17	5402138	VTSFT6545 WP49EG	A22
5387641	VTSFT6009 WP49EG	A21	5387760	VTSP06010 WP49EG	A13	5387871	VTSP07508 WU40EG	A17	5402139	VTSFT6546 WP49EG	A22
5387642	VTSFT6010 WP49EG	A19–A20	5387761	VTSP06011 WP49EG	A13	5387873	VTSP07508 WU41EG	A17	5402180	VTSFT6546 WU40EG	A22
5387643	VTSFT6011 WP49EG	A19–A20	5387762	VTSP06012 WP49EG	A14	5387875	VTSP07509 WU40EG	A17	5402181	VTSFT6547 WP49EG	A22
5387644	VTSFT6012 WP49EG	A21	5387763	VTSP06013 WP49EG	A13	5387877	VTSP07509 WU41EG	A17	5402182	VTSFT6547 WU40EG	A22
5387645	VTSFT6013 WP49EG	A19–A20	5387764	VTSP06014 WP49EG	A13	5387879	VTSP07510 WU40EG	A17	5402183	VTSFT6548 WP49EG	A22
5387646	VTSFT6014 WP49EG	A19–A20	5387765	VTSP06015 WP49EG	A14	5387881	VTSP07510 WU41EG	A17	5402184	VTSFT6549 WU40EG	A22
5387647	VTSFT6015 WP49EG	A21	5387766	VTSP06016 WP49EG	A13	5387883	VTSP07511 WU40EG	A17	5402185	VTSFT6549 WP49EG	A22
5387648	VTSFT6016 WP49EG	A19–A20	5387767	VTSP06017 WP49EG	A13	5387885	VTSP07512 WU40EG	A17	5402186	VTSFT6550 WP49EG	A22
5387649	VTSFT6017 WP49EG	A19–A20	5387768	VTSP06018 WP49EG	A14	5387887	VTSP07513 WU40EG	A17	5402187	VTSFT6550 WU40EG	A22
5387650	VTSFT6018 WP49EG	A21	5387769	VTSP06019 WP49EG	A13	5387889	VTSP07514 WU40EG	A17	5402188	VTSFT6551 WP42EG	A22
5387651	VTSFT6019 WP49EG	A19–A20	5387770	VTSP06020 WP49EG	A13	5387891	VTSP07515 WU40EG	A17	5402189	VTSFT6551 WP49EG	A22
5387652	VTSFT6020 WP49EG	A19–A20	5387771	VTSP06021 WP49EG	A14	5387893	VTSP07516 WU40EG	A17	5402190	VTSFT6551 WU40EG	A22
5387653	VTSFT6021 WP49EG	A21	5387772	VTSP06022 WP49EG	A13	5387895	VTSP07517 WU40EG	A17	5402191	VTSFT6552 WU40EG	A22
5387654	VTSFT6022 WP49EG	A19–A20	5387773	VTSP06023 WP49EG	A13	5387898	VTSP07518 WU40EG	A17	5402192	VTSFT6553 WP49EG	A22
5387655	VTSFT6023 WP49EG	A19–A20	5387774	VTSP06024 WP49EG	A14	5387900	VTSP07519 WU40EG	A17	5402193	VTSFT6553 WU40EG	A22
5387656	VTSFT6024 WP49EG	A21	5387776	VTSP06025 WP49EG	A13	5398708	VTSFT7505 WU40EG	A25	5402194	VTSFT6554 WP42EG	A22
5387657	VTSFT6025 WP49EG	A19–A20	5387777	VTSP06026 WP49EG	A13	5398709	VTSFT7505 WU41EG	A25	5402195	VTSFT6554 WP49EG	A22
5387658	VTSFT6026 WP49EG	A19–A20	5387778	VTSP06027 WP49EG	A14	5398790	VTSFT7506 WU40EG	A25	5402196	VTSFT6554 WU40EG	A22
5387659	VTSFT6027 WP49EG	A21	5387779	VTSP06028 WP49EG	A13	5398791	VTSFT7506 WU41EG	A25	5402197	VTSFT6555 WP49EG	A23
5387670	VTSFT6028 WP49EG	A19–A20	5387780	VTSP06029 WP49EG	A13	5398792	VTSFT7507 WU40EG	A25	5402198	VTSFT6555 WU40EG	A23
5387671	VTSFT6029 WP49EG	A19–A20	5387781	VTSP06030 WP49EG	A14	5398793	VTSFT7507 WU41EG	A25	5402199	VTSFT6556 WP49EG	A23
5387672	VTSFT6030 WP49EG	A21	5387782	VTSP06031 WP49EG	A13	5398794	VTSFT7508 WU40EG	A25	5402200	VTSFT6556 WU40EG	A23
5387673	VTSFT6031 WP49EG	A19–A20	5387783	VTSP06032 WP49EG	A13	5398795	VTSFT7508 WU41EG	A25	5402201	VTSFT6557 WP42EG	A23
5387674	VTSFT6032 WP49EG	A19–A20	5387784	VTSP06033 WP49EG	A13	5398796	VTSFT7509 WU40EG	A25	5402202	VTSFT6557 WP49EG	A23
5387675	VTSFT6033 WP49EG	A19–A20	5387785	VTSP06034 WP49EG	A13	5398797	VTSFT7509 WU41EG	A25	5402203	VTSFT6557 WU40EG	A23

Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)	Order No.	Catalogue No.	Page(s)
5402204	VTSFT6558 WU40EG	A23	5402261	VTSFT6531 WP49EG	A23	5408069	GT415021 GP6520	A47	5472640	VTSP06012 WU41EG	A14
5402205	VTSFT6559 WU40EG	A23	5402262	VTSFT6531 WU40EG	A23	5408400	GT415022 GP6520	A47	5472641	VTSP06013 WU41EG	A13
5402206	VTSFT6560 WP42EG	A23	5402263	VTSFT6532 WP49EG	A23	5408401	GT415023 GP6520	A47	5472644	VTSP06014 WU41EG	A13
5402207	VTSFT6560 WP49EG	A23	5402264	VTSFT6533 WU41EG	A23	5472587	VTSFT6005 WU41EG	A19–A20	5472645	VTSP06015 WU41EG	A14
5402208	VTSFT6560 WU40EG	A23	5402265	VTSFT6533 WP42EG	A23	5472589	VTSFT6007 WU41EG	A19–A20	5472646	VTSP06016 WU41EG	A13
5402209	VTSFT6561 WU40EG	A23	5402266	VTSFT6533 WP49EG	A23	5472600	VTSFT6008 WU41EG	A19–A20	5472647	VTSP06017 WU41EG	A13
5402210	VTSFT6562 WP49EG	A23	5402267	VTSFT6533 WU40EG	A23	5472602	VTSFT6010 WU41EG	A19–A20	5472648	VTSP06018 WU41EG	A14
5402211	VTSFT6562 WU40EG	A23	5402268	VTSFT6534 WP49EG	A23	5472603	VTSFT6011 WU41EG	A19–A20	5472649	VTSP06019 WU41EG	A13
5402212	VTSFT6563 WU40EG	A23	5402269	VTSFT6535 WU41EG	A23	5472605	VTSFT6013 WU41EG	A19–A20	5472650	VTSP06020 WU41EG	A13
5402213	VTSFT6564 WU40EG	A23	5402270	VTSFT6535 WP49EG	A23	5472606	VTSFT6014 WU41EG	A19–A20	5472651	VTSP06021 WU41EG	A14
5402214	VTSFT6564 WP49EG	A23	5402271	VTSFT6535 WU40EG	A23	5472608	VTSFT6016 WU41EG	A19–A20	5472652	VTSP06022 WU41EG	A13
5402215	VTSFT6565 WU40EG	A23	5402272	VTSFT6536 WP49EG	A23	5472609	VTSFT6017 WU41EG	A19–A20	5472653	VTSP06023 WU41EG	A13
5402216	VTSFT6566 WU40EG	A23	5402273	VTSFT6537 WU41EG	A23	5472611	VTSFT6019 WU41EG	A19–A20	5472654	VTSP06024 WU41EG	A14
5402217	VTSFT6567 WP49EG	A23	5402274	VTSFT6537 WP49EG	A23	5472612	VTSFT6020 WU41EG	A19–A20	5472655	VTSP06025 WU41EG	A13
5402218	VTSFT6567 WU40EG	A23	5402275	VTSFT6537 WU40EG	A23	5472614	VTSFT6022 WU41EG	A19–A20	5472656	VTSP06026 WU41EG	A13
5402219	VTSFT6568 WU40EG	A23	5402276	VTSFT6538 WU41EG	A23	5472615	VTSFT6023 WU41EG	A19–A20	5472657	VTSP06027 WU41EG	A14
5402220	VTSFT6569 WP49EG	A23	5402277	VTSFT6538 WP49EG	A23	5472617	VTSFT6025 WU41EG	A19–A20	5472658	VTSP06028 WU41EG	A13
5402221	VTSFT6569 WU40EG	A23	5402278	VTSFT6538 WU40EG	A23	5472618	VTSFT6026 WU41EG	A19–A20	5472659	VTSP06029 WU41EG	A13
5402222	VTSFT6570 WU40EG	A23	5402279	VTSFT6539 WU41EG	A23	5472620	VTSFT6028 WU41EG	A19–A20	5472660	VTSP06030 WU41EG	A14
5402223	VTSFT6571 WP49EG	A23	5402280	VTSFT6539 WP49EG	A23	5472621	VTSFT6029 WU41EG	A19–A20	5472661	VTSP06031 WU41EG	A13
5402224	VTSFT6571 WU40EG	A23	5402281	VTSFT6539 WU40EG	A23	5472623	VTSFT6031 WU41EG	A19–A20	5472662	VTSP06032 WU41EG	A13
5402225	VTSFT6572 WU40EG	A23	5402282	VTSFT6540 WU41EG	A23	5472624	VTSFT6032 WU41EG	A19–A20	5472663	VTSP06033 WU41EG	A13
5402226	VTSFT6573 WU40EG	A23	5402283	VTSFT6540 WP49EG	A23	5472625	VTSFT6033 WU41EG	A19–A20	5472664	VTSP06034 WU41EG	A13
5402227	VTSFT6525 WP49EG	A22	5402284	VTSFT6540 WU40EG	A23	5472626	VTSFT6034 WU41EG	A19–A20	5472665	VTSP06035 WU41EG	A13
5402228	VTSFT6525 WU40EG	A22	5402285	VTSFT6541 WU41EG	A23	5472627	VTSFT6035 WU41EG	A19–A20	5472666	VTSP06036 WU41EG	A13
5402229	VTSFT6526 WP49EG	A22	5402286	VTSFT6541 WP49EG	A23	5472628	VTSFT6036 WU41EG	A19–A20	5472667	VTSP06037 WU41EG	A13
5402250	VTSFT6526 WU40EG	A22	5402287	VTSFT6541 WU40EG	A23	5472629	VTSFT6037 WU41EG	A19–A20	5472668	VTSP06038 WU41EG	A13
5402251	VTSFT6527 WP49EG	A22	5402288	VTSFT6542 WU41EG	A23	5472630	VTSFT6038 WU41EG	A19–A20	5472669	VTSP06039 WU41EG	A13
5402252	VTSFT6527 WU40EG	A22	5402289	VTSFT6542 WP49EG	A23	5472631	VTSFT6039 WU41EG	A19–A20	5472670	VTSP06040 WU41EG	A13
5402253	VTSFT6528 WP49EG	A22	5402290	VTSFT6542 WU40EG	A23	5472632	VTSFT6040 WU41EG	A19–A20	5525685	HSK63ASYTER20095M	B6
5402254	VTSFT6528 WU40EG	A22	5402291	VTSFT6543 WP49EG	A23	5472633	VTSP06005 WU41EG	A13	5525686	HSK63ASYTER32108M	B6
5402255	VTSFT6529 WP49EG	A22	5402292	VTSFT6543 WU40EG	A23	5472634	VTSP06006 WU41EG	A14	5525687	HSK100ASYTER20102M	B7
5402256	VTSFT6529 WU40EG	A22	5402293	VTSFT6544 WP49EG	A23	5472635	VTSP06007 WU41EG	A13	5525688	HSK100ASYTER32115M	B7
5402257	VTSFT6530 WP49EG	A23	5402294	VTSFT6544 WU40EG	A23	5472636	VTSP06008 WU41EG	A13	5525689	BT30BSYTER20085M	B9
5402258	VTSFT6530 WU40EG	A23	5408066	GT405057 GP6520	A46	5472637	VTSP06009 WU41EG	A14	5525780	BT30BSYTER32073M	B9
5402259	VTSFT6531 WU41EG	A23	5408067	GT405058 GP6520	A46	5472638	VTSP06010 WU41EG	A13	5525781	SS25SYTER20073M	B8
5402260	VTSFT6531 WP42EG	A23	5408068	GT405059 GP6520	A46	5472639	VTSP06011 WU41EG	A13	5525782	SS25SYTER32087M	B8

Catalogue No.	Page(s)	Catalogue No.	Page(s)	Catalogue No.	Page(s)	Catalogue No.	Page(s)
100TGST006P	B26	100TGSTC031	B26	12787 GP4535	A77	16ERTC025	B30
100TGST012P	B26	100TGSTC037	B26	12788 GP4535	A77	16ERTC045034M	B29
100TGST025	B26	100TGSTC043	B26	12789 GP4535	A77	16ERTC055043M	B29
100TGST025P	B27	100TGSTC050	B26	12826 GP4535	A79	16ERTC060049M	B29
100TGST031	B26	100TGSTC062	B26	12827 GP4535	A79	16ERTC070055M	B29
100TGST037	B26	100TGSTC075	B27	12828 GP4535	A79	16ERTC080062M	B29
100TGST037P	B27	100TGSTC087	B27	12829 GP4535	A79	16ERTC090070M	B29
100TGST043	B26	100TGSTC100	B27	12830 GP4535	A79	16ERTC10	B30
100TGST050	B26	12225 GP4535	A76	12906 GN1515	A80	16ERTC12	B30
100TGST050P	B27	12226 GP4535	A76	12907 GN1515	A80	16ERTC8	B30
100TGST056	B26	12227 GP4535	A76	12908 GN1515	A80	16ERTCT10	B31
100TGST062	B26	12228 GP4535	A76	12909 GN1515	A80	16ERTCT6	B31
100TGST068	B26	12229 GP4535	A76	12911 GN1515	A80	16ERTCT8	B31
100TGST075	B27	12230 GP4535	A76	12912 GN1515	A80	20ERTC025	B30
100TGST075P	B27	12731 GP4535	A78	12914 GN1515	A80	20ERTC031	B30
100TGST081	B27	12732 GP4535	A78	12915 GN1515	A80	20ERTC037	B30
100TGST087	B27	12733 GP4535	A78	12ERTCT6	B31	20ERTC043	B30
100TGST090071M	B26	12734 GP4535	A78	150TGST037P	B28	20ERTC045034M	B29
100TGST094	B27	12735 GP4535	A78	150TGST050P	B28	20ERTC050	B30
100TGST10	B26	12736 GP4535	A78	150TGST075	B28	20ERTC055043M	B29
100TGST100	B27	12737 GP4535	A78	150TGST075P	B28	20ERTC060049M	B29
100TGST100080M	B26	12738 GP4535	A78	150TGST100	B28	20ERTC070055M	B29
100TGST110090M	B26	12739 GP4535	A78	150TGST100P	B28	20ERTC080062M	B29
100TGST112	B27	12740 GP4535	A78	150TGST112	B28	20ERTC090070M	B29
100TGST12	B26	12741 GP4535	A78	150TGST125	B28	20ERTC10	B30
100TGST120090M	B26	12781 GP4535	A77	150TGST125P	B28	20ERTC100080M	B29
100TGST140110M	B26	12782 GP4535	A77	150TGST137	B28	20ERTC110090M	B29
100TGST160120M	B26	12783 GP4535	A77	150TGST150	B28	20ERTC12	B30
100TGST180145M	B26	12784 GP4535	A77	150TGST150P	B28	20ERTC8	B30
100TGST6	B26	12785 GP4535	A77	150TGST162	B28	20ERTCT025	B31
100TGST8	B26	12786 GP4535	A77	150TGST175	B28	20ERTCT10	B31

Catalogue No.	Page(s)	Catalogue No.	Page(s)	Catalogue No.	Page(s)	Catalogue No.	Page(s)
20ERTCT12	B31	25ERTCT6	B31	32ERTCT037	B31	40ERTC220180M	B29
20ERTCT6	B31	25ERTCT8	B31	32ERTCT043	B31	40ERTCT025	B31
20ERTCT8	B31	32ERTC025	B30	32ERTCT050	B31	40ERTCT031	B31
25ERTC025	B30	32ERTC031	B30	32ERTCT056	B31	40ERTCT037	B31
25ERTC031	B30	32ERTC037	B30	32ERTCT062	B31	40ERTCT043	B31
25ERTC037	B30	32ERTC043	B30	32ERTCT10	B31	40ERTCT050	B31
25ERTC043	B30	32ERTC045034M	B29	32ERTCT12	B31	40ERTCT056	B31
25ERTC045034M	B29	32ERTC050	B30	32ERTCT8	B31	40ERTCT062	B31
25ERTC050	B30	32ERTC055043M	B29	40ERTC025	B30	40ERTCT069	B31
25ERTC055043M	B29	32ERTC056	B30	40ERTC031	B30	40ERTCT075	B31
25ERTC056	B30	32ERTC060049M	B29	40ERTC037	B30	40ERTCT081	B31
25ERTC060049M	B29	32ERTC062	B30	40ERTC043	B30	40ERTCT087	B31
25ERTC062	B30	32ERTC069	B30	40ERTC050	B30	50TGST006P	B23
25ERTC070055M	B29	32ERTC070055M	B29	40ERTC056	B30	50TGST012P	B23
25ERTC080062M	B29	32ERTC075	B30	40ERTC062	B30	50TGST025	B23
25ERTC090070M	B29	32ERTC080062M	B29	40ERTC069	B30	50TGST025021M	B22
25ERTC10	B30	32ERTC081	B30	40ERTC070055M	B29	50TGST028021M	B22
25ERTC100080M	B29	32ERTC090070M	B29	40ERTC075	B30	50TGST031	B23
25ERTC110090M	B29	32ERTC10	B30	40ERTC080062M	B29	50TGST032025M	B22
25ERTC12	B30	32ERTC100080M	B29	40ERTC081	B30	50TGST035027M	B22
25ERTC120090M	B29	32ERTC110090M	B29	40ERTC087	B30	50TGST037	B23
25ERTC140110M	B29	32ERTC12	B30	40ERTC090070M	B29	50TGST040032M	B22
25ERTC160120M	B29	32ERTC120090M	B29	40ERTC093	B30	50TGST043	B23
25ERTC8	B30	32ERTC140110M	B29	40ERTC100	B30	50TGST045034M	B22
25ERTCT025	B31	32ERTC160120M	B29	40ERTC100080M	B29	50TGST050	B23
25ERTCT031	B31	32ERTC180145M	B29	40ERTC110090M	B29	50TGST050040M	B22
25ERTCT037	B31	32ERTC200160M	B29	40ERTC120090M	B29	50TGST056	B23
25ERTCT043	B31	32ERTC8	B30	40ERTC140110M	B29	50TGST060049M	B22
25ERTCT050	B31	32ERTCT012P	B31	40ERTC160120M	B29	50TGST062	B23
25ERTCT10	B31	32ERTCT025	B31	40ERTC180145M	B29	50TGST063050M	B22
25ERTCT12	B31	32ERTCT031	B31	40ERTC200160M	B29	50TGST070055M	B22

Catalogue No.	Page(s)	Catalogue No.	Page(s)	Catalogue No.	Page(s)	Catalogue No.	Page(s)
50TGST071056M	B22	75TGST087	B25	DV50RC1075M	B20	GT025011 WP31MG	A31
50TGST080062M	B22	75TGST10	B24	DV50RC2084M	B20	GT025012 WP31MG	A31
50TGST090070M	B22	75TGST12	B24	DV50RC3139M	B20	GT025013 WP31MG	A31
50TGST10	B23	75TGST6	B24	GT005001 WP31MG	A30	GT025014 WP31MG	A31
50TGST100080M	B22	75TGST8	B24	GT005002 WP31MG	A30	GT025015 WP31MG	A31
50TGST110090M	B22	75TGSTC025	B24	GT005003 WP31MG	A30	GT025016 WP31MG	A31
50TGST12	B23	75TGSTC031	B24	GT005004 WP31MG	A30	GT025017 WP31MG	A31
50TGST120090M	B22	75TGSTC037	B25	GT005005 WP31MG	A30	GT025018 WP31MG	A31
50TGST6	B23	75TGSTC043	B24	GT005006 WP31MG	A30	GT045001 WH36MG	A32
50TGST8	B23	75TGSTC050	B25	GT005007 WP31MG	A30	GT045002 WH36MG	A32
50TGSTC025	B23	75TGSTC062	B25	GT005008 WP31MG	A30	GT045003 WH36MG	A32
50TGSTC031	B23	75TGSTC068	B25	GT005009 WP31MG	A30	GT045004 WH36MG	A32
50TGSTC037	B23	75TGSTC075	B25	GT005010 WP31MG	A30	GT045005 WH36MG	A32
50TGSTC043	B23	75TGSTC087	B25	GT005011 WP31MG	A30	GT045006 WH36MG	A32
50TGSTC050	B23	BT30BSYTER20085M	B9	GT005012 WP31MG	A30	GT045007 WH36MG	A32
50TGSTC056	B23	BT30BSYTER32073M	B9	GT005013 WP31MG	A30	GT045008 WH36MG	A32
75TGST006P	B24	BT40RC1067M	B15	GT005014 WP31MG	A30	GT045009 WH36MG	A32
75TGST012P	B25	BT40RC2094M	B15	GT005015 WP31MG	A30	GT045010 WH36MG	A32
75TGST025	B24	BT50RC1075M	B16	GT005016 WP31MG	A30	GT045011 WH36MG	A32
75TGST025P	B25	BT50RC2102M	B16	GT005017 WP31MG	A30	GT045012 WH36MG	A32
75TGST031	B24	BT50RC3141M	B16	GT005018 WP31MG	A30	GT045013 WH36MG	A32
75TGST037	B25	CV40CHTCRC1382	B17	GT025001 WP31MG	A31	GT045014 WH36MG	A32
75TGST037P	B25	CV40CHTCRC2524	B17	GT025002 WP31MG	A31	GT045015 WH36MG	A32
75TGST043	B24	CV40TCRC1297	B17	GT025003 WP31MG	A31	GT045016 WH36MG	A32
75TGST050	B25	CV40TCRC2393	B17	GT025004 WP31MG	A31	GT045017 WH36MG	A32
75TGST050P	B25	CV50TCRC1297	B18	GT025005 WP31MG	A31	GT045018 WH36MG	A32
75TGST056	B25	CV50TCRC2393	B18	GT025006 WP31MG	A31	GT065001 WS32MG	A33
75TGST062	B25	CV50TCRC3516	B18	GT025007 WP31MG	A31	GT065002 WS32MG	A33
75TGST068	B25	DV40RC1060M	B19	GT025008 WP31MG	A31	GT065003 WS32MG	A33
75TGST075	B25	DV40RC2098M	B19	GT025009 WP31MG	A31	GT065004 WS32MG	A33
75TGST081	B25	DV40RC3150M	B19	GT025010 WP31MG	A31	GT065005 WS32MG	A33

Catalogue No.	Page(s)	Catalogue No.	Page(s)	Catalogue No.	Page(s)	Catalogue No.	Page(s)
GT065006 WS32MG	A33	GT145007 WN35MG	A36	GT205100 GP6520	A38	GT215011 GP6520	A39
GT065007 WS32MG	A33	GT165001 WN35MG	A37	GT205101 GP6520	A38	GT215012 GP6520	A39
GT065008 WS32MG	A33	GT165002 WN35MG	A37	GT205102 GP6520	A38	GT225001 WN38MG	A40
GT065009 WS32MG	A33	GT165003 WN35MG	A37	GT205103 GP6520	A38	GT225002 WN38MG	A40
GT065010 WS32MG	A33	GT165004 WN35MG	A37	GT205104 GP6520	A38	GT225003 WN38MG	A40
GT105001 WS32MG	A34	GT165005 WN35MG	A37	GT205105 GP6520	A38	GT225004 WN38MG	A40
GT105002 WS32MG	A34	GT165006 WN35MG	A37	GT205106 GP6520	A38	GT225005 WN38MG	A40
GT105003 WS32MG	A34	GT165007 WN35MG	A37	GT205107 GP6520	A38	GT225006 WN38MG	A40
GT105004 WS32MG	A34	GT205077 GM6515	A38	GT205108 GP6520	A38	GT225007 WN38MG	A40
GT105005 WS32MG	A34	GT205078 GM6515	A38	GT205109 GP6520	A38	GT225008 WN38MG	A40
GT105006 WS32MG	A34	GT205079 GM6515	A38	GT205110 GP6520	A38	GT225009 WN38MG	A40
GT105007 WS32MG	A34	GT205080 GM6515	A38	GT205111 GP6520	A38, A52	GT225010 WN38MG	A40
GT105008 WS32MG	A34	GT205081 GM6515	A38	GT205113 GP6520	A38, A52	GT225011 WN38MG	A40
GT105009 WS32MG	A34	GT205082 GM6515	A38	GT205114 GP6520	A38, A52	GT225012 WN38MG	A40
GT105010 WS32MG	A34	GT205083 GM6515	A38	GT205116 GP6520	A38, A52	GT225013 WN38MG	A40
GT125001 WS32MG	A35	GT205084 GM6515	A38	GT205118 GP6520	A38, A52	GT225014 WN38MG	A40
GT125002 WS32MG	A35	GT205085 GM6515	A38	GT205122 GP6520	A52	GT225015 WN38MG	A40
GT125003 WS32MG	A35	GT205086 GM6515	A38	GT205124 GP6520	A52	GT225016 WP31MG	A40
GT125004 WS32MG	A35	GT205087 GM6515	A38	GT205125 GP6520	A52	GT225017 WP31MG	A40
GT125005 WS32MG	A35	GT205088 GM6515	A38	GT205127 GP6520	A52	GT225018 WP31MG	A40
GT125006 WS32MG	A35	GT205089 GM6515	A38	GT205129 GP6520	A52	GT225019 WP31MG	A40
GT125007 WS32MG	A35	GT205090 GM6515	A38	GT215001 GM6515	A39	GT225020 WP31MG	A40
GT125008 WS32MG	A35	GT205091 GM6515	A38	GT215002 GM6515	A39	GT225021 WP31MG	A40
GT125009 WS32MG	A35	GT205092 GM6515	A38	GT215003 GM6515	A39	GT225022 WP31MG	A40
GT125010 WS32MG	A35	GT205093 GM6515	A38	GT215004 GM6515	A39	GT225023 WP31MG	A40
GT145001 WN35MG	A36	GT205094 GP6520	A38	GT215005 GM6515	A39	GT225024 WP31MG	A40
GT145002 WN35MG	A36	GT205095 GP6520	A38	GT215006 GM6515	A39	GT225025 WP31MG	A40
GT145003 WN35MG	A36	GT205096 GP6520	A38	GT215007 GP6520	A39	GT225026 WP31MG	A40
GT145004 WN35MG	A36	GT205097 GP6520	A38	GT215008 GP6520	A39	GT225027 WP31MG	A40
GT145005 WN35MG	A36	GT205098 GP6520	A38	GT215009 GP6520	A39	GT225028 WP31MG	A40
GT145006 WN35MG	A36	GT205099 GP6520	A38	GT215010 GP6520	A39	GT225029 WP31MG	A40

Catalogue No.	Page(s)	Catalogue No.	Page(s)	Catalogue No.	Page(s)	Catalogue No.	Page(s)
GT225030 WP31MG	A40	GT305087 GM6515	A42	GT305118 GP6505	A42	GT315016 GP6520	A54
GT235001 WN38MG	A41	GT305088 GM6515	A42	GT305119 GP6505	A42	GT315017 GP6520	A54
GT235002 WN38MG	A41	GT305089 GM6515	A42	GT305120 GP6505	A42	GT315019 GP6520	A54
GT235003 WN38MG	A41	GT305090 GM6515	A42	GT305121 GP6505	A42	GT315021 GP6520	A54
GT235004 WN38MG	A41	GT305091 GM6515	A42	GT305122 GP6505	A42	GT315025 GP6520	A43, A54
GT235005 WN38MG	A41	GT305092 GM6515	A42	GT305123 GP6505	A42	GT315027 GP6520	A43, A54
GT235006 WN38MG	A41	GT305093 GM6515	A42	GT305124 GP6505	A42	GT315028 GP6520	A43, A54
GT235007 WN38MG	A41	GT305094 GM6515	A42	GT305148 GM6515	A42	GT315030 GP6520	A43, A54
GT235008 WN38MG	A41	GT305095 GM6515	A42	GT305151 GP6520	A53	GT315032 GP6520	A43, A54
GT235009 WN38MG	A41	GT305096 GM6515	A42	GT305153 GP6520	A53	GT315033 GP6520	A43
GT235010 WN38MG	A41	GT305097 GP6520	A42	GT305154 GP6520	A53	GT315034 GP6520	A43
GT235011 WN38MG	A41	GT305098 GP6520	A42	GT305156 GP6520	A53	GT315035 GP6520	A43
GT235012 WP31MG	A41	GT305099 GP6520	A42	GT305158 GP6520	A53	GT325001 GP6520	A44
GT235013 WP31MG	A41	GT305100 GP6520	A42	GT305161 GP6520	A42, A53	GT325002 GP6520	A44
GT235014 WP31MG	A41	GT305101 GP6520	A42	GT305163 GP6520	A42, A53	GT325003 GP6520	A44
GT235015 WP31MG	A41	GT305102 GP6520	A42	GT305164 GP6520	A42, A53	GT325004 GP6520	A44
GT235016 WP31MG	A41	GT305103 GP6520	A42	GT305166 GP6520	A42, A53	GT325005 GP6520	A44
GT235017 WP31MG	A41	GT305104 GP6520	A42	GT305168 GP6520	A42, A53	GT325006 GP6520	A44
GT235018 WP31MG	A41	GT305105 GP6520	A42	GT315001 GM6515	A43	GT325007 GP6520	A44
GT235019 WP31MG	A41	GT305106 GP6520	A42	GT315002 GM6515	A43	GT325008 GP6520	A44
GT235020 WP31MG	A41	GT305107 GP6520	A42	GT315003 GM6515	A43	GT325009 GP6520	A44
GT235021 WP31MG	A41	GT305108 GP6520	A42	GT315004 GM6515	A43	GT335001 GP6520	A45
GT235022 WP31MG	A41	GT305109 GP6520	A42	GT315005 GM6515	A43	GT335002 GP6520	A45
GT305079 GM6515	A42	GT305110 GP6520	A42	GT315006 GM6515	A43	GT335003 GP6520	A45
GT305080 GM6515	A42	GT305111 GP6520	A42	GT315007 GP6520	A43	GT335004 GP6520	A45
GT305081 GM6515	A42	GT305112 GP6520	A42	GT315008 GP6520	A43	GT335005 GP6520	A45
GT305082 GM6515	A42	GT305113 GP6520	A42	GT315009 GP6520	A43	GT335006 GP6520	A45
GT305083 GM6515	A42	GT305114 GP6520	A42	GT315010 GP6520	A43	GT335007 GP6520	A45
GT305084 GM6515	A42	GT305115 GP6520	A42	GT315011 GP6520	A43	GT335008 GP6520	A45
GT305085 GM6515	A42	GT305116 GP6505	A42	GT315012 GP6520	A43	GT335009 GP6520	A45
GT305086 GM6515	A42	GT305117 GP6505	A42	GT315014 GP6520	A54	GT405001 GP6520	A46

Catalogue No.	Page(s)	Catalogue No.	Page(s)	Catalogue No.	Page(s)	Catalogue No.	Page(s)
GT405002 GP6520	A46	GT425006 GP6520	A48	GT515009 GP6520	A56	GTM115013 WU13PV	A96
GT405003 GP6520	A46	GT425007 GP6520	A48	GT515010 GP6520	A56	GTM115014 WU13PV	A96
GT405004 GP6520	A46	GT425008 GP6520	A48	GT705001 WN48EG	A50	GTM115015 WU13PV	A96
GT405005 GP6520	A46	GT425009 GP6520	A48	GT705002 WN48EG	A50	GTM115016 WU13PV	A96
GT405006 GP6520	A46	GT435001 GP6520	A49	GT705003 WN48EG	A50	GTM115017 WU13PV	A96
GT405007 GP6520	A46	GT435002 GP6520	A49	GT705004 WN48EG	A50	GTM115018 WU13PV	A96
GT405008 GP6520	A46	GT435003 GP6520	A49	GT705005 WN48EG	A50	GTM115019 WU13PV	A96
GT405009 GP6520	A46	GT435004 GP6520	A49	GT705006 WN48EG	A50	GTM115020 WU13PV	A96
GT405010 GP6520	A46	GT435005 GP6520	A49	GT705007 WN48EG	A50	GTM115021 WU13PV	A96
GT405011 GP6520	A46	GT435006 GP6520	A49	GT705008 WN48EG	A50	GTM115022 WU13PV	A96
GT405057 GP6520	A46	GT435007 GP6520	A49	GT805001 WN48EG	A51	GTM115023 WU13PV	A96
GT405058 GP6520	A46	GT435008 GP6520	A49	GT805002 WN48EG	A51	GTM215001 WU12PV	A98
GT405059 GP6520	A46	GT435009 GP6520	A49	GT805003 WN48EG	A51	GTM215002 WU12PV	A98
GT415001 GP6520	A47	GT505001 GP6520	A55	GT805004 WN48EG	A51	GTM215003 WU12PV	A98
GT415002 GP6520	A47	GT505002 GP6520	A55	GT805005 WN48EG	A51	GTM215004 WU12PV	A98
GT415003 GP6520	A47	GT505003 GP6520	A55	GT805006 WN48EG	A51	GTM215005 WU12PV	A98
GT415004 GP6520	A47	GT505004 GP6520	A55	GT805007 WN48EG	A51	GTM215006 WU12PV	A98
GT415005 GP6520	A47	GT505005 GP6520	A55	GT805008 WN48EG	A51	GTM215007 WU12PV	A98
GT415006 GP6520	A47	GT505006 GP6520	A55	GT805009 WN48EG	A51	GTM215008 WU12PV	A98
GT415007 GP6520	A47	GT505007 GP6520	A55	GTM115001 WU13PV	A96	GTM215009 WU12PV	A98
GT415008 GP6520	A47	GT505008 GP6520	A55	GTM115002 WU13PV	A96	GTM215010 WU12PV	A98
GT415009 GP6520	A47	GT505009 GP6520	A55	GTM115003 WU13PV	A96	GTM215011 WU12PV	A98
GT415010 GP6520	A47	GT505010 GP6520	A55	GTM115004 WU13PV	A96	GTM215012 WU12PV	A98
GT415021 GP6520	A47	GT515001 GP6520	A56	GTM115005 WU13PV	A96	GTM215013 WU12PV	A98
GT415022 GP6520	A47	GT515002 GP6520	A56	GTM115006 WU13PV	A96	GTM215014 WU12PV	A98
GT415023 GP6520	A47	GT515003 GP6520	A56	GTM115007 WU13PV	A96	GTM215015 WU12PV	A98
GT425001 GP6520	A48	GT515004 GP6520	A56	GTM115008 WU13PV	A96	GTM215016 WU12PV	A98
GT425002 GP6520	A48	GT515005 GP6520	A56	GTM115009 WU13PV	A96	GTM215017 WU12PV	A97
GT425003 GP6520	A48	GT515006 GP6520	A56	GTM115010 WU13PV	A96	GTM215018 WU12PV	A97
GT425004 GP6520	A48	GT515007 GP6520	A56	GTM115011 WU13PV	A96	GTM215019 WU12PV	A97
GT425005 GP6520	A48	GT515008 GP6520	A56	GTM115012 WU13PV	A96	GTM215020 WU12PV	A97

Catalogue No.	Page(s)	Catalogue No.	Page(s)	Catalogue No.	Page(s)	Catalogue No.	Page(s)
GTM215021 WU12PV	A97	GTM315021 WU12PV	A99	GTM415022 WU16PV	A102	GX105006 WH16PG	A81
GTM215022 WU12PV	A97	GTM315022 WU12PV	A99	GTM415023 WU16PV	A102	GX105007 WH16PG	A81
GTM215023 WU12PV	A97	GTM315023 WU12PV	A99	GTM415024 WU16PV	A102	GX105008 WH16PG	A81
GTM215024 WU12PV	A97	GTM315024 WU12PV	A99	GTM415025 WU16PV	A101	GX105009 WH16PG	A81
GTM215025 WU12PV	A97	GTM315025 WU12PV	A99	GTM415026 WU16PV	A101	GX105010 WH16PG	A81
GTM215026 WU12PV	A97	GTM315026 WU12PV	A99	GTM415027 WU16PV	A101	GX105011 WH16PG	A81
GTM215027 WU12PV	A97	GTM315027 WU12PV	A99	GTM415028 WU16PV	A101	GX105012 WH16PG	A81
GTM215028 WU12PV	A97	GTM315028 WU12PV	A99	GTM415029 WU16PV	A101	GX105013 WH16PG	A81
GTM215029 WU12PV	A97	GTM315029 WU12PV	A99	GTM415030 WU16PV	A101	HSK100ACHRC1112M	B14
GTM215030 WU12PV	A97	GTM315030 WU12PV	A99	GTM415031 WU16PV	A101	HSK100ACHRC2144M	B14
GTM215031 WU12PV	A97	GTM415001 WU16PV	A102	GTM415032 WU16PV	A101	HSK100ACHRC3210M	B14
GTM315001 WU12PV	A100	GTM415002 WU16PV	A102	GTM415033 WU16PV	A101	HSK100ASYTER20102M	B7
GTM315002 WU12PV	A100	GTM415003 WU16PV	A102	GTM415034 WU16PV	A101	HSK100ASYTER32115M	B7
GTM315003 WU12PV	A100	GTM415004 WU16PV	A102	GTM415035 WU16PV	A101	HSK63ACHRC1105M	B13
GTM315004 WU12PV	A100	GTM415005 WU16PV	A102	GTM415036 WU16PV	A101	HSK63ACHRC2140M	B13
GTM315005 WU12PV	A100	GTM415006 WU16PV	A102	GTM415037 WU16PV	A101	HSK63ACHRC3203M	B13
GTM315006 WU12PV	A100	GTM415007 WU16PV	A102	GTM415038 WU16PV	A101	HSK63ASYTER20095M	B6
GTM315007 WU12PV	A100	GTM415008 WU16PV	A102	GTM415039 WU16PV	A101	HSK63ASYTER32108M	B6
GTM315008 WU12PV	A100	GTM415009 WU16PV	A102	GTM415040 WU16PV	A101	HSW45M	B21
GTM315009 WU12PV	A100	GTM415010 WU16PV	A102	GTM415041 WU16PV	A103	HSW58M	B21
GTM315010 WU12PV	A100	GTM415011 WU16PV	A102	GTM415042 WU16PV	A103	KM40TSST1045M	B10
GTM315011 WU12PV	A100	GTM415012 WU16PV	A102	GTM415043 WU16PV	A103	KM40TSST2070M	B10
GTM315012 WU12PV	A100	GTM415013 WU16PV	A102	GTM415044 WU16PV	A103	KM50TSST1050M	B11
GTM315013 WU12PV	A100	GTM415014 WU16PV	A102	GTM415045 WU16PV	A103	KM50TSST2075M	B11
GTM315014 WU12PV	A100	GTM415015 WU16PV	A102	GTM415046 WU16PV	A103	KM63TSTC2095M	B12
GTM315015 WU12PV	A100	GTM415016 WU16PV	A102	GTM415047 WU16PV	A103	KM63TSTC3147M	B12
GTM315016 WU12PV	A100	GTM415017 WU16PV	A102	GX105001 WH16PG	A81	LNA075M	B21
GTM315017 WU12PV	A99	GTM415018 WU16PV	A102	GX105002 WH16PG	A81	LNA100M	B21
GTM315018 WU12PV	A99	GTM415019 WU16PV	A102	GX105003 WH16PG	A81	NPA050	B21
GTM315019 WU12PV	A99	GTM415020 WU16PV	A102	GX105004 WH16PG	A81	OEW106	B21
GTM315020 WU12PV	A99	GTM415021 WU16PV	A102	GX105005 WH16PG	A81	RC1TA023018M030	B35

Catalogue No.	Page(s)	Catalogue No.	Page(s)	Catalogue No.	Page(s)	Catalogue No.	Page(s)
RC1TA025021M010	B34	RC2TA080063M080	B35	SS25SYTER32087M	B8	T31034.....	B36
RC1TA028021M020	B34	RC2TA090070M120	B34	T11006.....	B36	T31035.....	B36
RC1TA028023M025	B35	RC2TA090071M090	B35	T11007.....	B36	T31036.....	B36
RC1TA032025M030	B35	RC2TA100080M100	B34	T11008.....	B36	T31037.....	B36
RC1TA035027M030	B34	RC2TA110090M140	B34	T11009.....	B36	T310387.....	B36
RC1TA036028M035	B35	RC2TA112090M140	B35	T11010.....	B36	T310388.....	B36
RC1TA040030M035	B34	RC2TA120090M160	B34	T11012.....	B36	T310389.....	B36
RC1TA040032M040	B35	RC2TA125100M160	B35	T11013.....	B36	VTSFT6005 WP49EG.....	A19–A20
RC1TA045034M040	B34	RC2TA140110M180	B34	T11014.....	B36	VTSFT6005 WU41EG.....	A19–A20
RC1TA045036M060	B35	RC2TA140112M180	B35	T11015.....	B36	VTSFT6006 WP49EG.....	A21
RC1TA050040M050	B35	RC2TA160120M200	B34	T110155.....	B36	VTSFT6007 WP49EG.....	A19–A20
RC1TA056045M000	B35	RC2TA160125M220	B35	T110166.....	B36	VTSFT6007 WU41EG.....	A19–A20
RC1TA060049M050	B34	RC2TA180140M240	B35	T110177.....	B36	VTSFT6008 WP49EG.....	A19–A20
RC1TA063050M060	B35	RC2TA180145M220	B34	T1SET.....	B37	VTSFT6008 WU41EG.....	A19–A20
RC1TA070055M100	B34	RC3TA110090M140	B34	T21018.....	B36	VTSFT6009 WP49EG.....	A21
RC1TA071056M070	B35	RC3TA112090M140	B35	T21019.....	B36	VTSFT6010 WP49EG.....	A19–A20
RC1TA080062M080	B34	RC3TA120090M160	B34	T21020.....	B36	VTSFT6010 WU41EG.....	A19–A20
RC1TA080063M080	B35	RC3TA140110M180	B34	T21021.....	B36	VTSFT6011 WP49EG.....	A19–A20
RC1TA090070M120	B34	RC3TA160120M200	B34	T21022.....	B36	VTSFT6011 WU41EG.....	A19–A20
RC1TA090071M090	B35	RC3TA160125M220	B35	T21023.....	B36	VTSFT6012 WP49EG.....	A21
RC1TA100080M100	B34	RC3TA180140M240	B34	T21024.....	B36	VTSFT6013 WP49EG.....	A19–A20
RC1TA110090M140	B34	RC3TA180145M240	B34	T21025.....	B36	VTSFT6013 WU41EG.....	A19–A20
RC1TA112090M140	B35	RC3TA200160M300	B34	T21026.....	B36	VTSFT6014 WP49EG.....	A19–A20
RC2TA045034M040	B34	RC3TA220180M300	B34	T21027.....	B36	VTSFT6014 WU41EG.....	A19–A20
RC2TA045036M060	B35	RC3TA224180M330	B35	T210288.....	B36	VTSFT6015 WP49EG.....	A21
RC2TA050040M050	B35	RC3TA250200M360	B34	T210299.....	B36	VTSFT6016 WP49EG.....	A19–A20
RC2TA060049M050	B34	RC3TA280220M360	B34	T210300.....	B36	VTSFT6016 WU41EG.....	A19–A20
RC2TA063050M060	B35	SS075TCTG050	B21	T2SET.....	B37	VTSFT6017 WP49EG.....	A19–A20
RC2TA070055M100	B34	SS100TCTG075	B21	T31031.....	B36	VTSFT6017 WU41EG.....	A19–A20
RC2TA071056M070	B35	SS150TCTG100756	B21	T31032.....	B36	VTSFT6018 WP49EG.....	A21
RC2TA080062M080	B34	SS25SYTER20073M	B8	T31033.....	B36	VTSFT6019 WP49EG.....	A19–A20

Catalogue No.	Page(s)	Catalogue No.	Page(s)	Catalogue No.	Page(s)	Catalogue No.	Page(s)
VTSFT6019 WU41EG.....	A19–A20	VTSFT6037 WP49EG.....	A19–A20	VTSFT6516 WP42EG.....	A22	VTSFT6529 WU40EG.....	A22
VTSFT6020 WP49EG.....	A19–A20	VTSFT6037 WU41EG.....	A19–A20	VTSFT6516 WP49EG.....	A22	VTSFT6530 WP49EG.....	A23
VTSFT6020 WU41EG.....	A19–A20	VTSFT6038 WP49EG.....	A19–A20	VTSFT6516 WU40EG.....	A22	VTSFT6530 WU40EG.....	A23
VTSFT6021 WP49EG.....	A21	VTSFT6038 WU41EG.....	A19–A20	VTSFT6516 WU41EG.....	A22	VTSFT6531 WP42EG.....	A23
VTSFT6022 WP49EG.....	A19–A20	VTSFT6039 WP49EG.....	A19–A20	VTSFT6517 WP49EG.....	A22	VTSFT6531 WP49EG.....	A23
VTSFT6022 WU41EG.....	A19–A20	VTSFT6039 WU41EG.....	A19–A20	VTSFT6518 WP42EG.....	A22	VTSFT6531 WU40EG.....	A23
VTSFT6023 WP49EG.....	A19–A20	VTSFT6040 WP49EG.....	A19–A20	VTSFT6518 WP49EG.....	A22	VTSFT6531 WU41EG.....	A23
VTSFT6023 WU41EG.....	A19–A20	VTSFT6040 WU41EG.....	A19–A20	VTSFT6518 WU40EG.....	A22	VTSFT6532 WP49EG.....	A23
VTSFT6024 WP49EG.....	A21	VTSFT6506 WP42EG.....	A22	VTSFT6518 WU41EG.....	A22	VTSFT6533 WP42EG.....	A23
VTSFT6025 WP49EG.....	A19–A20	VTSFT6506 WP49EG.....	A22	VTSFT6519 WP49EG.....	A22	VTSFT6533 WP49EG.....	A23
VTSFT6025 WU41EG.....	A19–A20	VTSFT6506 WU40EG.....	A22	VTSFT6520 WP49EG.....	A22	VTSFT6533 WU40EG.....	A23
VTSFT6026 WP49EG.....	A19–A20	VTSFT6506 WU41EG.....	A22	VTSFT6520 WU40EG.....	A22	VTSFT6533 WU41EG.....	A23
VTSFT6026 WU41EG.....	A19–A20	VTSFT6507 WP49EG.....	A22	VTSFT6521 WP42EG.....	A22	VTSFT6534 WP49EG.....	A23
VTSFT6027 WP49EG.....	A21	VTSFT6508 WP49EG.....	A22	VTSFT6521 WP49EG.....	A22	VTSFT6535 WP49EG.....	A23
VTSFT6028 WP49EG.....	A19–A20	VTSFT6509 WP49EG.....	A22	VTSFT6521 WU40EG.....	A22	VTSFT6535 WU40EG.....	A23
VTSFT6028 WU41EG.....	A19–A20	VTSFT6509 WU40EG.....	A22	VTSFT6521 WU41EG.....	A22	VTSFT6535 WU41EG.....	A23
VTSFT6029 WP49EG.....	A19–A20	VTSFT6509 WU41EG.....	A22	VTSFT6522 WP49EG.....	A22	VTSFT6536 WP49EG.....	A23
VTSFT6029 WU41EG.....	A19–A20	VTSFT6510 WP49EG.....	A22	VTSFT6523 WP42EG.....	A23	VTSFT6537 WP49EG.....	A23
VTSFT6030 WP49EG.....	A21	VTSFT6511 WP42EG.....	A22	VTSFT6523 WP49EG.....	A23	VTSFT6537 WU40EG.....	A23
VTSFT6031 WP49EG.....	A19–A20	VTSFT6511 WP49EG.....	A22	VTSFT6523 WU40EG.....	A23	VTSFT6537 WU41EG.....	A23
VTSFT6031 WU41EG.....	A19–A20	VTSFT6511 WU40EG.....	A22	VTSFT6523 WU41EG.....	A23	VTSFT6538 WP49EG.....	A23
VTSFT6032 WP49EG.....	A19–A20	VTSFT6511 WU41EG.....	A22	VTSFT6524 WP49EG.....	A23	VTSFT6538 WU40EG.....	A23
VTSFT6032 WU41EG.....	A19–A20	VTSFT6512 WP49EG.....	A22	VTSFT6525 WP49EG.....	A22	VTSFT6538 WU41EG.....	A23
VTSFT6033 WP49EG.....	A19–A20	VTSFT6513 WP49EG.....	A22	VTSFT6525 WU40EG.....	A22	VTSFT6539 WP49EG.....	A23
VTSFT6033 WU41EG.....	A19–A20	VTSFT6513 WU40EG.....	A22	VTSFT6526 WP49EG.....	A22	VTSFT6539 WU40EG.....	A23
VTSFT6034 WP49EG.....	A19–A20	VTSFT6513 WU41EG.....	A22	VTSFT6526 WU40EG.....	A22	VTSFT6539 WU41EG.....	A23
VTSFT6034 WU41EG.....	A19–A20	VTSFT6514 WP42EG.....	A22	VTSFT6527 WP49EG.....	A22	VTSFT6540 WP49EG.....	A23
VTSFT6035 WP49EG.....	A19–A20	VTSFT6514 WP49EG.....	A22	VTSFT6527 WU40EG.....	A22	VTSFT6540 WU40EG.....	A23
VTSFT6035 WU41EG.....	A19–A20	VTSFT6514 WU40EG.....	A22	VTSFT6528 WP49EG.....	A22	VTSFT6540 WU41EG.....	A23
VTSFT6036 WP49EG.....	A19–A20	VTSFT6514 WU41EG.....	A22	VTSFT6528 WU40EG.....	A22	VTSFT6541 WP49EG.....	A23
VTSFT6036 WU41EG.....	A19–A20	VTSFT6515 WP49EG.....	A22	VTSFT6529 WP49EG.....	A22	VTSFT6541 WU40EG.....	A23

Catalogue No.	Page(s)	Catalogue No.	Page(s)	Catalogue No.	Page(s)	Catalogue No.	Page(s)
VTSFT6541 WU41EG.....	A23	VTSFT6557 WP42EG.....	A23	VTSFT6576 WP49EG.....	A24	VTSFT7508 WU41EG.....	A25
VTSFT6542 WP49EG.....	A23	VTSFT6557 WP49EG.....	A23	VTSFT6577 WP42EG.....	A24	VTSFT7509 WU40EG.....	A25
VTSFT6542 WU40EG.....	A23	VTSFT6557 WU40EG.....	A23	VTSFT6577 WP49EG.....	A24	VTSFT7509 WU41EG.....	A25
VTSFT6542 WU41EG.....	A23	VTSFT6558 WU40EG.....	A23	VTSFT6578 WP42EG.....	A24	VTSFT7510 WU40EG.....	A25
VTSFT6543 WP49EG.....	A23	VTSFT6559 WU40EG.....	A23	VTSFT6578 WP49EG.....	A24	VTSFT7510 WU41EG.....	A25
VTSFT6543 WU40EG.....	A23	VTSFT6560 WP42EG.....	A23	VTSFT6579 WP42EG.....	A24	VTSFT7511 WU40EG.....	A25
VTSFT6544 WP49EG.....	A23	VTSFT6560 WP49EG.....	A23	VTSFT6579 WP49EG.....	A24	VTSFT7512 WU40EG.....	A25
VTSFT6544 WU40EG.....	A23	VTSFT6560 WU40EG.....	A23	VTSFT6580 WP42EG.....	A24	VTSFT7513 WU40EG.....	A25
VTSFT6545 WP49EG.....	A22	VTSFT6561 WU40EG.....	A23	VTSFT6580 WP49EG.....	A24	VTSFT7514 WU40EG.....	A25
VTSFT6546 WP49EG.....	A22	VTSFT6562 WP49EG.....	A23	VTSFT6581 WP42EG.....	A24	VTSFT7515 WU40EG.....	A25
VTSFT6546 WU40EG.....	A22	VTSFT6562 WU40EG.....	A23	VTSFT6581 WP49EG.....	A24	VTSFT7516 WU40EG.....	A25
VTSFT6547 WP49EG.....	A22	VTSFT6563 WU40EG.....	A23	VTSFT6582 WP49EG.....	A24	VTSFT7517 WU40EG.....	A25
VTSFT6547 WU40EG.....	A22	VTSFT6564 WP49EG.....	A23	VTSFT6583 WP42EG.....	A24	VTSFT7518 WU40EG.....	A25
VTSFT6548 WP49EG.....	A22	VTSFT6564 WU40EG.....	A23	VTSFT6583 WP49EG.....	A24	VTSFT7519 WU40EG.....	A25
VTSFT6549 WP49EG.....	A22	VTSFT6565 WU40EG.....	A23	VTSFT6584 WP42EG.....	A24	VTSP06005 WP49EG.....	A13
VTSFT6549 WU40EG.....	A22	VTSFT6566 WU40EG.....	A23	VTSFT6584 WP49EG.....	A24	VTSP06005 WU41EG.....	A13
VTSFT6550 WP49EG.....	A22	VTSFT6567 WP49EG.....	A23	VTSFT6585 WP42EG.....	A24	VTSP06006 WP49EG.....	A14
VTSFT6550 WU40EG.....	A22	VTSFT6567 WU40EG.....	A23	VTSFT6585 WP49EG.....	A24	VTSP06006 WU41EG.....	A14
VTSFT6551 WP42EG.....	A22	VTSFT6568 WU40EG.....	A23	VTSFT6586 WP42EG.....	A24	VTSP06007 WP49EG.....	A13
VTSFT6551 WP49EG.....	A22	VTSFT6569 WP49EG.....	A23	VTSFT6586 WP49EG.....	A24	VTSP06007 WU41EG.....	A13
VTSFT6551 WU40EG.....	A22	VTSFT6569 WU40EG.....	A23	VTSFT6587 WP42EG.....	A24	VTSP06008 WP49EG.....	A13
VTSFT6552 WU40EG.....	A22	VTSFT6570 WU40EG.....	A23	VTSFT6587 WP49EG.....	A24	VTSP06008 WU41EG.....	A13
VTSFT6553 WP49EG.....	A22	VTSFT6571 WP49EG.....	A23	VTSFT6588 WP42EG.....	A24	VTSP06009 WP49EG.....	A14
VTSFT6553 WU40EG.....	A22	VTSFT6571 WU40EG.....	A23	VTSFT6588 WP49EG.....	A24	VTSP06009 WU41EG.....	A14
VTSFT6554 WP42EG.....	A22	VTSFT6572 WU40EG.....	A23	VTSFT7505 WU40EG.....	A25	VTSP06010 WP49EG.....	A13
VTSFT6554 WP49EG.....	A22	VTSFT6573 WU40EG.....	A23	VTSFT7505 WU41EG.....	A25	VTSP06010 WU41EG.....	A13
VTSFT6554 WU40EG.....	A22	VTSFT6574 WP42EG.....	A24	VTSFT7506 WU40EG.....	A25	VTSP06011 WP49EG.....	A13
VTSFT6555 WP49EG.....	A23	VTSFT6574 WP49EG.....	A24	VTSFT7506 WU41EG.....	A25	VTSP06011 WU41EG.....	A13
VTSFT6555 WU40EG.....	A23	VTSFT6575 WP42EG.....	A24	VTSFT7507 WU40EG.....	A25	VTSP06012 WP49EG.....	A14
VTSFT6556 WP49EG.....	A23	VTSFT6575 WP49EG.....	A24	VTSFT7507 WU41EG.....	A25	VTSP06012 WU41EG.....	A14
VTSFT6556 WU40EG.....	A23	VTSFT6576 WP42EG.....	A24	VTSFT7508 WU40EG.....	A25	VTSP06013 WP49EG.....	A13

Catalogue No.	Page(s)	Catalogue No.	Page(s)	Catalogue No.	Page(s)	Catalogue No.	Page(s)
VTSP06013 WU41EG	A13	VTSP06029 WP49EG	A13	VTSP06508 WU40EG	A15	VTSP06521 WP42EG	A15
VTSP06014 WP49EG	A13	VTSP06029 WU41EG	A13	VTSP06508 WU41EG	A15	VTSP06521 WP49EG	A15
VTSP06014 WU41EG	A13	VTSP06030 WP49EG	A14	VTSP06509 WP49EG	A15	VTSP06521 WU40EG	A15
VTSP06015 WP49EG	A14	VTSP06030 WU41EG	A14	VTSP06510 WP42EG	A15	VTSP06521 WU41EG	A15
VTSP06015 WU41EG	A14	VTSP06031 WP49EG	A13	VTSP06510 WP49EG	A15	VTSP06522 WP49EG	A15
VTSP06016 WP49EG	A13	VTSP06031 WU41EG	A13	VTSP06510 WU40EG	A15	VTSP06523 WP42EG	A16
VTSP06016 WU41EG	A13	VTSP06032 WP49EG	A13	VTSP06510 WU41EG	A15	VTSP06523 WP49EG	A16
VTSP06017 WP49EG	A13	VTSP06032 WU41EG	A13	VTSP06511 WP49EG	A15	VTSP06523 WU40EG	A16
VTSP06017 WU41EG	A13	VTSP06033 WP49EG	A13	VTSP06512 WP49EG	A15	VTSP06523 WU41EG	A16
VTSP06018 WP49EG	A14	VTSP06033 WU41EG	A13	VTSP06512 WU40EG	A15	VTSP06524 WP49EG	A16
VTSP06018 WU41EG	A14	VTSP06034 WP49EG	A13	VTSP06512 WU41EG	A15	VTSP06525 WP49EG	A15
VTSP06019 WP49EG	A13	VTSP06034 WU41EG	A13	VTSP06513 WP42EG	A15	VTSP06525 WU40EG	A15
VTSP06019 WU41EG	A13	VTSP06035 WP49EG	A13	VTSP06513 WP49EG	A15	VTSP06525 WU41EG	A15
VTSP06020 WP49EG	A13	VTSP06035 WU41EG	A13	VTSP06513 WU40EG	A15	VTSP06526 WP49EG	A15
VTSP06020 WU41EG	A13	VTSP06036 WP49EG	A13	VTSP06513 WU41EG	A15	VTSP06526 WU40EG	A15
VTSP06021 WP49EG	A14	VTSP06036 WU41EG	A13	VTSP06514 WP49EG	A15	VTSP06526 WU41EG	A15
VTSP06021 WU41EG	A14	VTSP06037 WP49EG	A13	VTSP06515 WP42EG	A15	VTSP06527 WP49EG	A15
VTSP06022 WP49EG	A13	VTSP06037 WU41EG	A13	VTSP06515 WP49EG	A15	VTSP06527 WU40EG	A15
VTSP06022 WU41EG	A13	VTSP06038 WP49EG	A13	VTSP06515 WU40EG	A15	VTSP06527 WU41EG	A15
VTSP06023 WP49EG	A13	VTSP06038 WU41EG	A13	VTSP06515 WU41EG	A15	VTSP06528 WP49EG	A15
VTSP06023 WU41EG	A13	VTSP06039 WP49EG	A13	VTSP06516 WP49EG	A15	VTSP06528 WU40EG	A15
VTSP06024 WP49EG	A14	VTSP06039 WU41EG	A13	VTSP06517 WP42EG	A15	VTSP06528 WU41EG	A15
VTSP06024 WU41EG	A14	VTSP06040 WP49EG	A13	VTSP06517 WP49EG	A15	VTSP06529 WP49EG	A15
VTSP06025 WP49EG	A13	VTSP06040 WU41EG	A13	VTSP06517 WU40EG	A15	VTSP06529 WU40EG	A15
VTSP06025 WU41EG	A13	VTSP06505 WP42EG	A15	VTSP06517 WU41EG	A15	VTSP06529 WU41EG	A15
VTSP06026 WP49EG	A13	VTSP06505 WP49EG	A15	VTSP06518 WP49EG	A15	VTSP06530 WP49EG	A16
VTSP06026 WU41EG	A13	VTSP06505 WU40EG	A15	VTSP06519 WP42EG	A15	VTSP06530 WU40EG	A16
VTSP06027 WP49EG	A14	VTSP06505 WU41EG	A15	VTSP06519 WP49EG	A15	VTSP06530 WU41EG	A16
VTSP06027 WU41EG	A14	VTSP06506 WP49EG	A15	VTSP06519 WU40EG	A15	VTSP06531 WP42EG	A16
VTSP06028 WP49EG	A13	VTSP06507 WP49EG	A15	VTSP06519 WU41EG	A15	VTSP06531 WP49EG	A16
VTSP06028 WU41EG	A13	VTSP06508 WP49EG	A15	VTSP06520 WP49EG	A15	VTSP06531 WU40EG	A16

Catalogue No.	Page(s)	Catalogue No.	Page(s)	Catalogue No.	Page(s)	Catalogue No.	Page(s)
VTSP06531 WU41EG	A16	VTSP06542 WP49EG	A16	VTSP06558 WP49EG	A16	VTSP06574 WU40EG	A16
VTSP06532 WP49EG	A16	VTSP06542 WU40EG	A16	VTSP06558 WU40EG	A16	VTSP06575 WU40EG	A16
VTSP06533 WP42EG	A16	VTSP06542 WU41EG	A16	VTSP06559 WP49EG	A16	VTSP07505 WU40EG	A17
VTSP06533 WP49EG	A16	VTSP06543 WP49EG	A16	VTSP06559 WU40EG	A16	VTSP07505 WU41EG	A17
VTSP06533 WU40EG	A16	VTSP06544 WP49EG	A16	VTSP06560 WP49EG	A16	VTSP07506 WU40EG	A17
VTSP06533 WU41EG	A16	VTSP06545 WP49EG	A15	VTSP06560 WU40EG	A16	VTSP07506 WU41EG	A17
VTSP06534 WP49EG	A16	VTSP06545 WU40EG	A15	VTSP06561 WP49EG	A16	VTSP07507 WU40EG	A17
VTSP06535 WP42EG	A16	VTSP06546 WP49EG	A15	VTSP06561 WU40EG	A16	VTSP07507 WU41EG	A17
VTSP06535 WP49EG	A16	VTSP06546 WU40EG	A15	VTSP06562 WP49EG	A16	VTSP07508 WU40EG	A17
VTSP06535 WU40EG	A16	VTSP06547 WP49EG	A15	VTSP06562 WU40EG	A16	VTSP07508 WU41EG	A17
VTSP06535 WU41EG	A16	VTSP06547 WU40EG	A15	VTSP06563 WP49EG	A16	VTSP07509 WU40EG	A17
VTSP06536 WP49EG	A16	VTSP06548 WP49EG	A15	VTSP06563 WU40EG	A16	VTSP07509 WU41EG	A17
VTSP06537 WP42EG	A16	VTSP06548 WU40EG	A15	VTSP06564 WP49EG	A16	VTSP07510 WU40EG	A17
VTSP06537 WP49EG	A16	VTSP06549 WP49EG	A15	VTSP06564 WU40EG	A16	VTSP07510 WU41EG	A17
VTSP06537 WU40EG	A16	VTSP06549 WU40EG	A15	VTSP06565 WP49EG	A16	VTSP07511 WU40EG	A17
VTSP06537 WU41EG	A16	VTSP06550 WP49EG	A15	VTSP06565 WU40EG	A16	VTSP07512 WU40EG	A17
VTSP06538 WP42EG	A16	VTSP06550 WU40EG	A15	VTSP06566 WP49EG	A16	VTSP07513 WU40EG	A17
VTSP06538 WP49EG	A16	VTSP06551 WP49EG	A15	VTSP06566 WU40EG	A16	VTSP07514 WU40EG	A17
VTSP06538 WU40EG	A16	VTSP06551 WU40EG	A15	VTSP06567 WP49EG	A16	VTSP07515 WU40EG	A17
VTSP06538 WU41EG	A16	VTSP06552 WP49EG	A15	VTSP06567 WU40EG	A16	VTSP07516 WU40EG	A17
VTSP06539 WP42EG	A16	VTSP06552 WU40EG	A15	VTSP06568 WP49EG	A16	VTSP07517 WU40EG	A17
VTSP06539 WP49EG	A16	VTSP06553 WP49EG	A15	VTSP06568 WU40EG	A16	VTSP07518 WU40EG	A17
VTSP06539 WU40EG	A16	VTSP06553 WU40EG	A15	VTSP06569 WP49EG	A16	VTSP07519 WU40EG	A17
VTSP06539 WU41EG	A16	VTSP06554 WP49EG	A16	VTSP06569 WU40EG	A16		
VTSP06540 WP42EG	A16	VTSP06554 WU40EG	A16	VTSP06570 WP49EG	A16		
VTSP06540 WP49EG	A16	VTSP06555 WP49EG	A16	VTSP06570 WU40EG	A16		
VTSP06540 WU40EG	A16	VTSP06555 WU40EG	A16	VTSP06571 WP49EG	A16		
VTSP06540 WU41EG	A16	VTSP06556 WP49EG	A16	VTSP06571 WU40EG	A16		
VTSP06541 WP49EG	A16	VTSP06556 WU40EG	A16	VTSP06572 WU40EG	A16		
VTSP06541 WU40EG	A16	VTSP06557 WP49EG	A16	VTSP06573 WP49EG	A16		
VTSP06541 WU41EG	A16	VTSP06557 WU40EG	A16	VTSP06573 WU40EG	A16		

North America

- United States**

General Sales: 800-979-4342

Technical Support: 888-539-5145

w-na.service@widia.com

- Canada**

General Sales: 800-979-4342

Technical Support: 888-539-5145

w-ca.service@widia.com

- Mexico**

General Sales: 001-888-402-4963

w-mx.service@widia.com

Central/South America

- Argentina**

General Sales: +54 11 4719-0700

w-ar.service@widia.com

- Brazil**

General Sales: 55 19 3936 9200

w-br.service@widia.com

- Chile**

General Sales: 56-2-2641177

w-cl.service@widia.com

- El Salvador**

General Sales: (503) 2218 8096

prometca@salnet.net

- Venezuela**

General Sales: 305-595-5175

paxi@bellsouth.net

Africa

- Egypt**

General Sales: +20 2-263-9828

w-uk.service@widia.com

- South Africa**

General Sales: +27 11 748 9300

w-za.service@widia.com

Europe

- Austria**

General Sales: +43-2236-379898

Technical Support: 0800 291630

w-at.service@widia.com

- Belgium**

General Sales: +32 4 248 48 48

Technical Support: 0800 80410

w-be.service@widia.com

- Czech Republic**

General Sales: 800 900 840

w-cz.service@widia.com

- France**

General Sales: +33 1 60 12 81 00

Technical Support: 080 5540 379

w-fr.service@widia.com

- Germany**

General Sales: +49 6172 737-0

Technical Support: 0800 1015774

w-de.service@widia.com

- Great Britain**

General Sales: 0800 072 4528

Technical Support: 0800 028 2996

w-uk.service@widia.com

- Hungary**

General Sales: +36 96 618 158

w-hu.service@widia.com

- Ireland**

General Sales: +44 28-9084-9433

w-ie.service@widia.com

- Italy**

General Sales: +39 02-895-961

Technical Support: 800 916568

w-it.service@widia.com

- Luxembourg**

General Sales: +32 4 248 48 48

w-be.service@widia.com

- Netherlands**

General Sales: +31 26 384 48 51

Technical Support: 0800 0201131

w-nl.service@widia.com

- Poland**

General Sales: +48 61 6656501

Technical Support: 00800 4411943

w-pl.service@widia.com

- Portugal**

General Sales: +351 22 4119 400

w-pt.service@widia.com

- Russia**

General Sales: 81080021431044

w-ru.service@widia.com

- Slovakia**

General Sales: 0800-044053

w-sk.service@widia.com

- Spain**

General Sales: +34 93706 06 10

w-es.service@widia.com

- Turkey**

General Sales: +90 216-574-4780

w-tr.service@widia.com

East/Asia Pacific

- **Australia**

General Sales: 613 9755 5302

w-au.service@widia.com

- **Bahrain**

General Sales: 00 971 (0) 5572371

w-uk.service@widia.com

- **China**

General Sales: +86 400 889 2136

Technical Support: +86 400 889 2136

w-cn.service@widia.com

- **Dubai**

General Sales: +971 433 911 46

w-uk.service@widia.com

- **Hong Kong**

General Sales: +86 21 3860 8288

w-cn.service@widia.com

- **India**

General Sales: +91 80 2219 8215

w-in.service@widia.com

- **Indonesia**

General Sales: +62 81 1148 8217

w-sg.service@widia.com

- **Israel**

General Sales: 972 3 556 2211

w-il.service@widia.com

- **Japan**

General Sales: 03 3820 2855

w-jp.service@widia.com

- **Korea**

General Sales: +82 2 2109 5505

w-kr.service@widia.com

- **Kuwait**

General Sales: 00 971 (0) 5572371

w-uk.service@widia.com

- **Malaysia**

General Sales: (6) 03-5569 9080

w-my.service@widia.com

- **New Zealand**

General Sales: 613 9755 5302

w-nz.service@widia.com

- **Pakistan**

General Sales: +92 21 2465305

itsystem@brain.net.pk

- **Singapore***

General Sales: +65 6 265-9222

w-sg.service@widia.com

*Vietnam and Philippines individuals should contact the Singapore office.

- **Taiwan**

General Sales: +886-4-2350 1920

w-tw.service@widia.com

- **Thailand**

General Sales: 662 642 3455

w-th.service@widia.com



Tapping Icons

 Countersinking/ Stroke Chamfering	 Drilling: Flat Bottom	 Drilling: Blind	 Reaming: Through Hole
 Reaming: Blind Hole	 Tapping: Through Hole	 Tapping: Blind Hole	 Threading: Through Hole
 Threading: Blind Hole	 HSS-E HSS-E	 HSS-E-PM HSS-E-PM	 HM HM
 Drilling Depth: 2x	 2-3 Chamfer Form: Form C (2-3)	 3,5-5 Chamfer Form: Form D (3,5-5)	 1,5-2 Chamfer Form: Form E (1,5-2)
 3-5 Chamfer Form: Plug Chamfer (3-5)	 Tapping Helix Angle: 0°	 Tapping Helix Angle: 10°	 Tapping Helix Angle: L8°
 Tapping Helix Angle: 15°	 Tapping Helix Angle: L15°	 Tapping Helix Angle: 25°	 Tapping Helix Angle: 30°
 Tapping Helix Angle: 42°	 Tapping Helix Angle: 45°	 DIN 371 DIN number 371	 DIN 374 DIN number 374
 DIN 376 DIN number 376	 DIN 2174 DIN number 2174	 Through Coolant: Radial: Tapping	 Flood Coolant: Tapping
 Through Coolant: Axial: Tapping	 ISO 2 Manufacturer's Specs: ISO 2	 JIS Manufacturer's Specs: JIS	 2B Manufacturer's Specs: Class of Fit: 2B
 3B Manufacturer's Specs: Class of Fit: 3B	 6H Manufacturer's Specs: Class of Fit: 6H	 6HX Manufacturer's Specs: Class of Fit: 6HX	 6G Manufacturer's Specs: Class of Fit: 6G
 UNF Manufacturer's Specs: UNF	 UNC Manufacturer's Specs: UNC	 UNJC Manufacturer's Specs: UNJC	 UNJF Manufacturer's Specs: UNJF
 M Manufacturer's Specs: M	 MF Manufacturer's Specs: MF		

Tooling Systems Icons

 Shank: Cylindrical Plain	 Shank: Cylindrical Weldon®	 Shank: Weldon: 2 Flat	 Shank: Whistle Notch™
 Shank: Whistle Notch 2°	 Shank: SK BT (MAS-403-BT)	 Shank: SK DV (DIN 69871)	 Shank: SK CAT Drawbar Thread
 Shank: SK Shank: CAT Drawbar Thread: 1"-8 unc	 Shank: HSK Shank: A/DIN Number 69893	 Shank: HSK A/DIN 69893	 Shank: KM-TS™ (ISO 26622)
 Shank: Square Shank: L=4"	 Shank: Square	 Axial Adjustments: End	 Balance-by-Design
 Collet: ER DIN 6499	 ER Collet	 Drawbar Thread Size: M16	 Drawbar Thread Size: M24
 Tension: Tension & Compression	 Tension: Tension Only	 Through Coolant: Radial: Drilling	 Through Coolant: Radial: Tapping
 Through Coolant: Radial: Tapping/50 bar, 725 psi	 Through Coolant: No Through Coolant: Radial: Tapping	 Axial: Drilling	 Through Coolant: 1500 psi
 ISO 26622			

DIN — German Institute for Standardisation

Greenfield Tap & Die


The brand name you've trusted since 1872 is now...

WIDIA-GTD™

Greenfield Tap & Die, now WIDIA-GTD™, has been supplying the highest quality taps, dies, and gages to the industry for more than 140 years. From premium raw materials, put through a stringent ISO-certified production process, to carefully inspected, packaged, and shipped tools, WIDIA-GTD has consistently delivered quality products and services to you, our customer. Always committed to innovation, WIDIA-GTD continues to focus on developing products that enable you to achieve better production at lower costs.



140+ Years of Reliable Quality

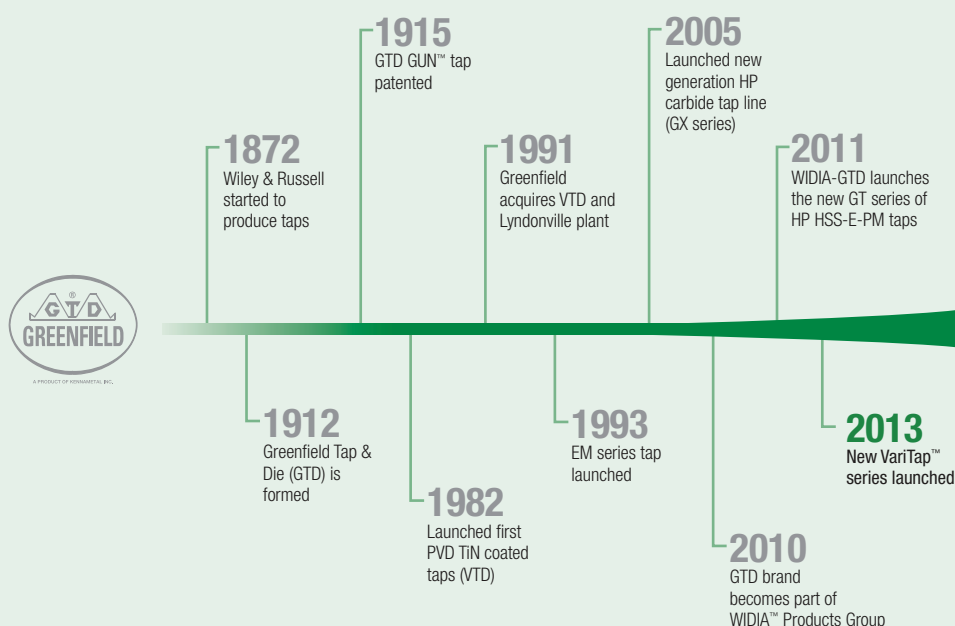


WIDIA

GTD™

WIDIATM

GTDTM



Greenfield Tap & Die

Tap into the power of the original.

A heritage of hard work, innovation, and excellence. That's what makes an original.

WIDIATM VariTapTM

Built on a 140-year legacy of providing the industry with the highest quality performance in taps, dies, and gages. Our history propels us to keep delivering the most advanced solutions.

The WIDIA VariTap is the next application of our commitment to innovation.

- Extensive range of sizes, fits, styles, and coatings, equipped with optimised geometry, offering the largest portfolio solution of multipurpose taps available.
- Capable of working with a wide variety of materials.
- Long and consistent tool life leading to lower inventory costs.
- Unique spiral point geometry provides low tapping torque, while pushing chips ahead of the tap in through holes.
- Superior thread finish.



To learn more about the unmatched benefits of **WIDIA VariTap**, call 800.979.4342, contact your local Authorised Distributor, or visit www.widia.com/varitap.

WIDIATM

On the Web



FAST, FREE, AND EASY REGISTRATION

You can easily register with www.widia.com to obtain full access to the features of the site.

Find a Local Authorised WIDIA™ Distributor in Your Area

The WIDIA Products Group offers world-class products and services globally. Our distributors know us, and more importantly, they know you. They know better than anyone in the industry how to put the global power of WIDIA to work for you — in your industry, in your region, and for your business.

Contact Us

Our customers are important to us. We want to provide you the best customer service in the industry. If you have a comment or question, please send it to us. We strive to respond to all inquiries within 24 hours.

WIDIA Products

Whether your operation is turning, milling, or holmaking, WIDIA brands are the high-performance tooling you need. We offer standard and custom solutions for the general engineering market.

To learn more, contact your local Authorised Distributor or visit www.widia.com.



Metalcutting Safety

IMPORTANT SAFETY INSTRUCTIONS

Read before using the tools in this catalogue!

Projectile and Fragmentation Hazards

Modern metalcutting operations involve high spindle and cutter speeds and high temperatures and cutting forces. Hot metal chips may fly off the workpiece during metalcutting. Although cutting tools are designed and manufactured to withstand high cutting forces and temperatures, they can sometimes fragment, particularly if they are subjected to over-stress, severe impact, or other abuse.

To avoid injury:

- Always wear appropriate personal protective equipment, including safety goggles, when operating metalcutting machines or working nearby.
- Always make sure all machine guards are in place.

Breathing and Skin Contact Hazards:

Grinding carbide or other advanced cutting tool materials produce dust or mist containing metallic particles. Breathing this dust or mist — especially over an extended period — can cause temporary or permanent lung disease or make existing medical conditions worse. Contact with this dust or mist can irritate eyes, skin, and mucous membranes and may make existing skin conditions worse.

To avoid injury:

- Always wear breathing protection and safety goggles when grinding.
- Provide ventilation control and collect and properly dispose of dust, mist, or sludge from grinding.
- Avoid skin contact with dust or mist.

For more information, read the applicable Material Safety Data Sheet provided by Kennametal and consult General Industry Safety and Health Regulations, Part 1910, Title 29 of the Code of Federal Regulations.

These safety instructions are general guidelines. Many variables affect machining operations. It is impossible to cover every specific situation. The technical information included in this catalogue and recommendations on machining practices may not apply to your particular operation. For more information, consult Kennametal's Metalcutting Safety booklet, available free from Kennametal at 724.539.5747 or fax 724.539.5439. For specific product safety and environmental questions, contact our Corporate Environmental Health and Safety Office at 724.539.5066 or fax 724.539.5372.

ERICKSON, GP6505, GP6515, GP6520, Green Box, GT, WIDIA-GTD, GUN, KM, KM40TS, KM50TS, KM63TS, KM-TS, WIDIA-Metcut, Romicron, Stellite, Synchro Plus, TN5100, TN7100, ToolBOSS, Top Cut Plus, TOP DRILL, VariTap, Victory, Whistle Notch, Widaflex, WIDIA, and WIDIA-Hanita are trademarks of Kennametal, Inc. and are used as such herein. The absence of a product, service name, or logo from this list does not constitute a waiver of Kennametal's trademark or other intellectual property rights concerning that name or logo.

Hardox® is a registered trademark of SSAB Technology AB Corporation.
Hastelloy® is a registered trademarks of Haynes International, Inc. Corporation.
INCONEL®, NIMONIC®, and UDIMET® are registered trademarks of Special Metals Corporation.
SAFE-LOCK™ is a trademark of Haimer GmbH.
Teflon® is a registered trademark of E.I. du Pont de Nemours and Company.
Weldon® is a registered trademark of Weldon Tool Company.

©Copyright 2013 by Kennametal Inc., Latrobe, PA 15650. All rights reserved.

ADVANCES MASTER CATALOGUE 2015

World and Corporate Headquarters

Kennametal Inc.
WIDIA Products Group
1600 Technology Way
Latrobe, PA 15650 USA
Phone: 800.979.4342
E-mail: w-na.service@widia.com

European Headquarters

Kennametal Europe GmbH
WIDIA Products Group
Rheingoldstrasse 50
CH 8212 Neuhausen am Rheinfall
Switzerland
Phone: 41.52.6750.100
E-mail: w-ch.service@widia.com

Asia-Pacific Headquarters

Kennametal (Singapore) Pte. Ltd.
WIDIA Products Group
3A International Business Park
Unit #01-02/03/05, ICON@IBP
Singapore 609935
Phone: 65.6265.9222
E-mail: w-sg.service@widia.com

India Headquarters

Kennametal India Limited
WIDIA Products Group
8/9th Mile, Tumkur Road
Bangalore - 560 073
Phone: 91.80.2839.4321
E-mail: w-in.service@widia.com

©2013 Kennametal Inc. | All rights reserved. | A-13-03449EN_me